

CÔNG TY CỔ PHẦN CÔNG NGHỆ HỢP LONG

ø22 HW Series Switches & Pilot Lights

Complete with finger-safe contact blocks
Ensure safety and save wiring time

- Finger-safe terminal blocks
- Self-cleaning rolling action contacts.
- Degree of protection: IP65 (except dual pushbutton: IP40)
- Dual pushbutton switches available with two pushbuttons and a pilot light integrated into one space-saving unit.
- A wide range of operating voltages for worldwide application.
- UL, CSA rated, and EN compliant.

Standards and Approvals

Applicable Standards	Mark	File No. or Organization
UL508		UL Listing File No. E68961
CSA C22.2 No.14		CSA File No. LR21451
EN60947-5-1		TÜV Rheinland
		EU Low Voltage Directive and RoHS 2 Directive (except for DC-DC converter unit)
GB14048.5		Contact IDEC for details.

- DC-DC converter types are not approved by standards.
- See website for details on approvals and standards.



Application for dual pushbuttons:

Ideal for use as power switches and start/stop switches (available with I/ON and O/OFF markings on the buttons and a pilot light in the center). Interlock type prevents two pushbuttons from being pressed at the same time, providing the best solution for up/down switches.

Specifications and Ratings

Contact Ratings

Pushbuttons Illuminated Pushbuttons Dual Pushbuttons Selector Switches Illuminated Selector Switches Selector Pushbuttons	Rated insulation voltage	600V
	Rated continuous current	10A
	Contact ratings by utilization category IEC60947-5-1	AC-15 (A600) DC-13

Contact Ratings by Utilization Category

HW-U10 (NO contact), HW-U01 (NC contact)


Operating Voltage			24V	48V	50V	110V	220V	440V
Operating Current	AC 50/60 Hz	AC-12 Control of resistive loads and solid state loads	10A	–	10A	10A	6A	2A
		AC-15 Control of electromagnetic loads (> 72 VA)	10A	–	7A	5A	3A	1A
	DC	DC-12 Control of resistive loads and solid state loads	10A	5A	–	2.2A	1.1A	–
		DC-13 Control of electromagnets	5A	2A	–	1.1A	0.6A	–

HW-U10R (EM contact/NO contact), HW-U01R (LB contact/NC contact)

Operating Voltage			24V	48V	50V	110V	220V	440V
Operating Current	AC 50/60 Hz	AC-12 Control of resistive loads and solid state loads	5A	–	5A	5A	3A	1A
		AC-15 Control of electromagnetic loads (> 72 VA)	5A	–	3.5A	2.5A	1.5A	0.5A
	DC	DC-12 Control of resistive loads and solid state loads	5A	2.5A	–	1.1A	0.55A	–
		DC-13 Control of electromagnets	2.5A	1A	–	0.55A	0.3A	–

- The operating current represents the classification by making and breaking currents (IEC 60947-5-1).
- Contact materials: Silver contacts
- Minimum applicable load: 3V AC/DC, 5 mA (applicable range may vary with operating conditions and load types)

HW-U Contact Block

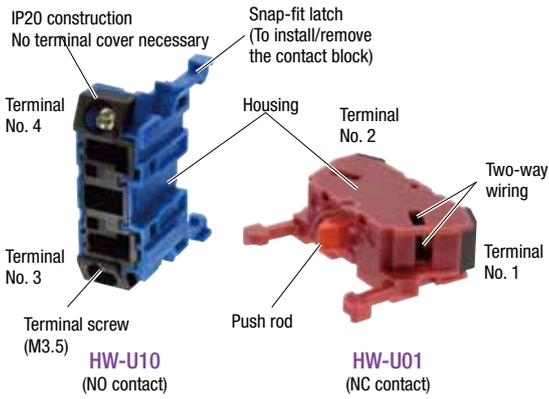

Part No.	HW-U10	HW-U01	HW-U10R	HW-U01R
Contact				
Contact No.	1NO	1NC	EM (NO) (early make)	LB (NC) (late break)
Contact No.	3-4	1-2	3-4	1-2
Housing	Blue	Purple red	Blue	Purple red
Push Rod	Green	Red	Black	White
Weight	Approx. 11g			

- Up to 2 layers (4 blocks) can be attached.
- Gold contacts available (gold-plated silver)

LED Specifications

Unit	Color	Rated Voltage		Operating Voltage		LED lamp	
						Lamp Base	Part No.
Illuminated pushbutton Illuminated selector switch Pilot light Dual pushbutton (with pilot light)	R (red) G (green) Y (yellow) A (amber) W (white) S (blue) PW (pure white)	6V AC/DC	50/60 Hz	6V AC/DC	±10%	BA9S/13	LSTD-6*
		12V AC/DC		12V AC/DC			LSTD-1*
		24V AC/DC		24V AC/DC			LSTD-2*
		100/110V AC		100/110V AC			LSTD-6*
		115/120V AC		115/120V AC (*1)			
		200/220V AC		200/220V AC			
		230/240V AC		230/240V AC (*1)			
		380V AC		380V AC			
		400/440V AC		400/440V AC			
		480V AC		480V AC			
110V DC	90 to 140V DC						

- See page 3. for details on LED lamp ratings.
 - For the LED lamp used in jumbo dome pilot lights, see page 3.
 - Yellow (Y) cannot be used with dual pushbuttons.
 - Color codes for units without LED lamps:
R (red), G (green), A (amber), Y (yellow), W (white), S (blue)
- When using a commercially available lamp, choose a lamp with rated voltage 5 to 30V AC/DC and 1W maximum, and with the same base and shape. Make sure of correct operation before installation. The operation of HW series cannot be guaranteed when a commercially available lamp is used.

Power Unit Terminal

Power Unit	Illuminated Unit				Pilot Light		
	Full voltage adapter	Transformer		DC-DC converter	Full voltage adapter	Transformer	DC-DC converter
Rated Voltage	6, 12, 24V AC/DC	100 to 240V AC	380V AC min.	110V DC	6, 12, 24V AC/DC	100 to 480V AC	110V DC
Polarity	None	None	None	X1 (+) X2 (-)	None	None	X1 (+) X2 (-)
Shape/Terminal							

LED Lamp Ratings

LSTD (Except Jumbo Dome Pilot Lights)

Part No.	LSTD-6*		LSTD-1*	LSTD-2*
Lamp Base	BA9S/13			
Rated Voltage	6V AC/DC		12V AC/DC	24V AC/DC
Voltage Range	6V AC/DC $\pm 10\%$		12V AC/DC $\pm 10\%$	24V AC/DC $\pm 10\%$
Current Draw	Color	R, A, W	G, S, PW	R, G, A, W, S, PW
	DC	7mA	5.5mA	10mA
	AC	8mA	8mA	11mA
Lamp Base Color	Same as illumination color (PW: gray)			
Voltage Marking	Die stamped on the base			
Life (reference value)	Approx. 50,000 hours (The luminance is reduced to 50% the initial intensity when used on complete DC at 25°C.)			
Internal Circuit			<p>Symbols</p> <ul style="list-style-type: none"> LED chip Rectifier diode Zener diode Resistor 	<p>Example: LSTD-2PW</p>
Weight	Approx. 2g			

- Specify a color code in place of *. R (red), G (green), A (amber), W (white), S (blue), PW (pure white)
- Use a pure white (PW) LED for yellow (Y) illumination.

LSTDB (For Jumbo Dome Pilot Lights HW1P-5Q4 Only)

Part No.	LSTDB-2*	
Lamp Base	BA9S/13	
Voltage Range	24V AC/DC $\pm 10\%$	
Current Draw	15mA	
Rated Voltage	24V AC/DC	
Life (reference value)	Approx. 20,000 hours (The luminance is reduced to 50% the initial intensity when used on complete DC at 25°C.)	
Internal Circuit	<p>R, A, W</p>	<p>Symbols</p> <ul style="list-style-type: none"> LED chip Rectifier diode Zener diode Resistor
	<p>G, S, PW</p>	

- Specify a color code in place of *. R (red), G (green), A (amber), W (white), S (blue), PW (pure white)
- Use a pure white (PW) LED for yellow (Y) illumination.

Specifications


Operating Temperature	Non-illuminated: -25 to +60°C (no freezing) Illuminated: -25 to +50°C (no freezing) Jumbo dome pilot lights: -25 to +55°C (no freezing)
Operating Humidity	45 to 85% RH (no condensation)
Storage Temperature	-40 to +80°C (no freezing)
Contact Resistance	50 mΩ maximum (initial value)
Insulation Resistance	100 MΩ minimum (500V DC megger)
Dielectric Strength	Between live and dead metal parts: 2,500V AC, 1 minute (Full voltage and illuminated units: 2,000V AC, 1 minute) (*1)
Vibration Resistance	Damage limits: 30 Hz, amplitude 1.5 mm Operating extremes: 5 to 55 Hz, amplitude 0.5 mm
Shock Resistance	Damage limits: 1,000m/s ² Operating extremes: 100m/s ²
Mechanical Life (minimum operations)	Pushbutton, Illuminated pushbutton Momentary.....500,000 Maintained.....500,000 Dual pushbutton.....500,000 Selector switch.....500,000 Key selector switch (Disc tumbler).....500,000 Key selector switch (Pin tumbler).....100,000 Illuminated selector switch.....500,000 Pushbutton selector.....250,000 Mono-lever switches.....250,000
Electrical Life (*5)	Pushbutton, Illuminated pushbutton Momentary.....500,000 (*2) Maintained.....500,000 (*4) Dual pushbutton.....500,000 (*2) Selector switch.....500,000 (*3) Key selector switch (Disc tumbler).....500,000 (*3) Key selector switch (Pin tumbler).....100,000 (*3) Illuminated selector switch.....500,000 (*3) Pushbutton selector.....250,000 (*3) Mono-lever switches.....250,000 (*4)
Weight (Apporox.)	66g (HW1B-M122) 20g (HW1P-1Q4) 84g (HW1L-M122Q4) 66g (HW1S-2T22) 94g (HW1K-2A22) 72g (HW1K-2JPC11) 84g (HW1F-222Q4) 71g (HW1R-2A22) 82g (HW1M-2222-22N9) 72g (HW7D-B1111111) 90g (HW7D-L111111Q4)

*1) Dielectric strength for dual pushbuttons are as follows:
Full voltage type: 1,000V AC, 1 minute (between live and dead metal parts)
Transformer and DC-DC converter types: 2,000V AC, 1 minute (between live and dead metal parts)
*2) Switching frequency 1,800 operations/h, duty ratio 40%
*3) Switching frequency 1,200 operations/h, duty ratio 40%
*4) Switching frequency 900 operations/h, duty ratio 40%
*5) Load condition 220V AC, 3A (AC-15)

Mounting Hole Layout

All dimensions in mm.

Panel Cut (IEC60947-5-1)

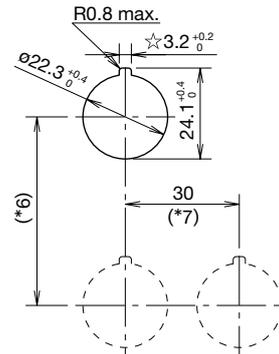

- The minimum mounting centers are applicable to switches with one layer of contact blocks (one to two contact blocks). When two layers of contact blocks are mounted, determine the minimum mounting centers in consideration of convenience for wiring.
- When high temperature is expected, take necessary measures such as securing sufficient mounting centers or using a cooling fan.

Minimum Mounting Centers

(Dimensions in mm)

Unit	A (*6)	B (*7)
ø40mm mushroom button	50	40
Pushbutton selector	50	50
Mono-lever switch	72	72
Pilot light	30	30
Jumbo dome pilot light	85	85
Dual pushbutton switch	55	30
Illuminated selector switch	50	50

- When using the safety lever lock, determine the vertical spacing (*6) in consideration of convenience for installing and removing the safety lever lock. (Recommended vertical spacing: 100 mm)
The minimum length of vertical spacing (*6) is 45 mm when safety lever lock is not used.
- The 3.2 mm recess is for preventing rotation and is not necessary when the nameplate or anti-rotation ring is not used.

Degree of Protection

Unit	IEC 60529
All units except dual pushbutton switches	IP65 (*8)
Dual pushbutton switches	IP40 (*9)

- *8) When using a nameplate with the HW series, IP65 protection degree is achieved only when nameplates shown on page 37 are used. (IP40 when other ø22 nameplates such as NWA are used)
- *9) IP65 protection degree when HW9Z-D7D button cover is used.

Ordering Information

Standard models

- Specify Ordering No. when ordering.
- Specify a button or lens color code in place of *.
- Pilot lights, illuminated pushbuttons, and illuminated selector switches have an LED lamp installed.
- Nameplates and accessories for mono-lever switch are ordered separately. See page 37 to 39.
- Color codes for units without LED lamps:
R (red), G (green), A (amber), Y (yellow), W (white), S (blue)

When using a commercially available lamp, choose a lamp with rated voltage 5 to 30V AC/DC and 1W maximum, and with the same base and shape. Make sure of correct operation before installation. The operation of HW series cannot be guaranteed when a commercially available lamp is used.

Ordering Information

Pushbuttons (Page 8 to 10)

When specifying gold-plated silver contact and contact configuration:

HW1B-M1	11	R	-MAU	
				Optional contact
				Contact configuration
			MAU:	Gold contact
			10:	1NO
			01:	1NC
			11:	1NO1NC
			20:	2NO
			02:	2NC
			22:	2NO2NC
			40:	4NO
			04:	4NC
			13:	1NO3NC
			31:	3NO1NC
			30:	3NO
			03:	3NC
			12:	1NO2NC
			21:	2NO1NC

Pilot Lights (Page 11)

When specifying LED operating voltage:

HW1P-1	H2	R		
				Operating voltage
			Q0:	Without LED lamp
			Q2:	6V AC/DC
			Q3:	12V AC/DC
			Q4:	24V AC/DC
			H2:	100/110V AC
			H22:	115/120V AC
			M2:	200/220V AC
			M42:	230/240V AC
			S2:	380V AC
			T2:	400/440V AC
			T82:	480V AC
			D2:	110V DC

Note: Color codes for units without LED lamps: R (red), G (green), A (amber), Y (yellow), W (white), S (blue)

When using a commercially available lamp, choose a lamp with rated voltage 5 to 30V AC/DC and 1W maximum, and with the same base and shape. Make sure of correct operation before installation. The operation of HW series cannot be guaranteed when a commercially available lamp is used.

Illuminated Pushbuttons (Page 13 to 17)

When specifying gold-plated silver contact, contact configuration, and LED operating voltage:

HW1L-M1	11	H2	R	-MAU	
					Optional contact
					Operating Voltage
					Contact configuration
			MAU:	Gold contact	
			Q0:	Without LED lamp	
			Q2:	6V AC/DC	
			Q3:	12V AC/DC	
			Q4:	24V AC/DC	
			H2:	100/110V AC	
			H22:	115/120V AC	
			M2:	200/220V AC	
			M42:	230/240V AC	
			S2:	380V AC	
			T2:	400/440V AC	
			T82:	480V AC	
			D2:	110V DC	
			10:	1NO	
			01:	1NC	
			11:	1NO1NC	
			20:	2NO	
			02:	2NC	
			22:	2NO2NC	
			40:	4NO	
			04:	4NC	
			13:	1NO3NC	
			31:	3NO1NC	
			30:	3NO	
			03:	3NC	
			12:	1NO2NC	
			21:	2NO1NC	

Note:

• Color codes for units without LED lamps: R (red), G (green), A (amber), Y (yellow), W (white), S (blue)


When using a commercially available lamp, choose a lamp with rated voltage 5 to 30V AC/DC and 1W maximum, and with the same base and shape. Make sure of correct operation before installation. The operation of HW series cannot be guaranteed when a commercially available lamp is used.

• Odd number of contact blocks, such as 1NO, 1NC, 3NO, 2NO-1NC, 1NO-2NC, and 3NC, is not available for transformer type or DC-DC converter type.

Ordering Information


Dual Pushbutton Switches [without pilot light] (Page 20)

When specifying gold-plated silver contact and contact configuration:

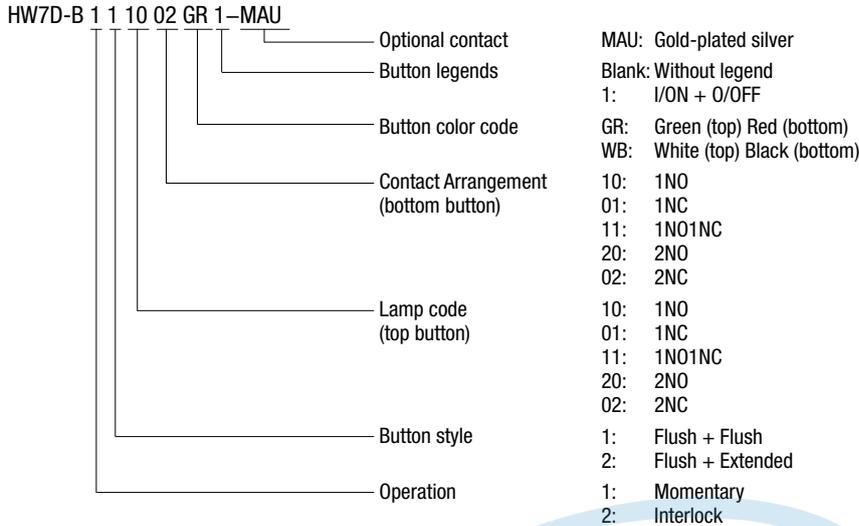

Dual Pushbutton Switches [with pilot light] (Page 21)

When specifying gold-plated silver contact, contact configuration, and LED operating voltage:

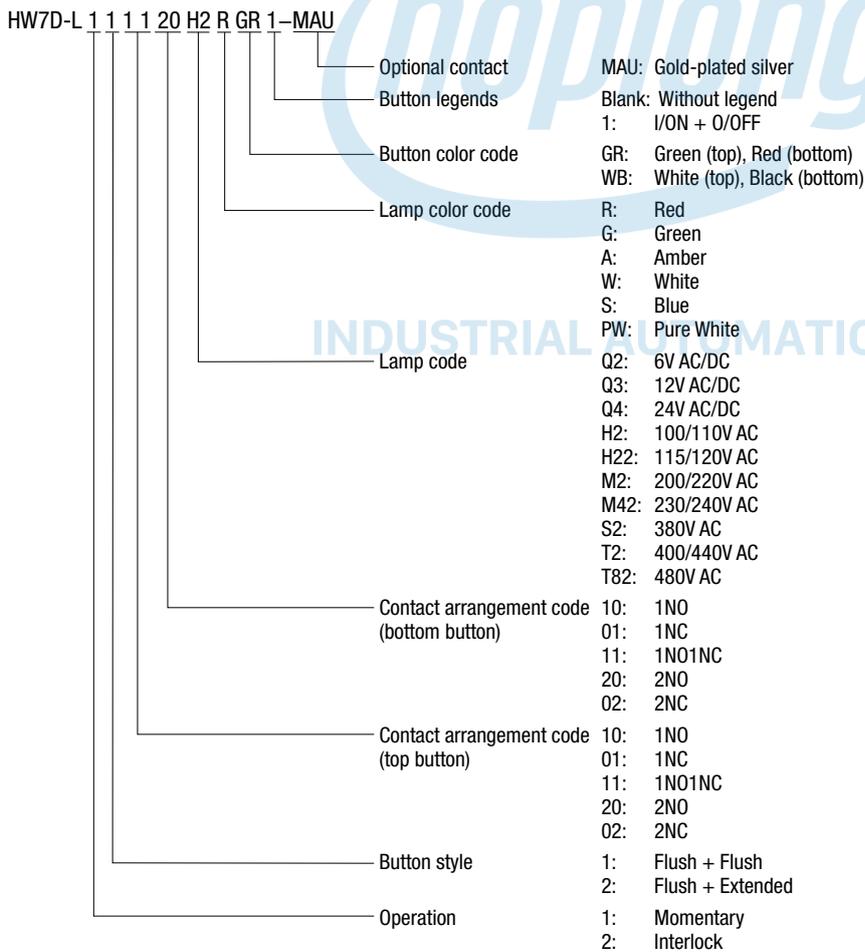


Note: Transformer type cannot have a contact arrangement of 3 contact blocks for the total of top and bottom.

Ordering Information

Key Selector Switches (Pin Tumbler Key) (Pages 25 to 26)

When specifying gold-plated silver contact, key removal position, and key number:

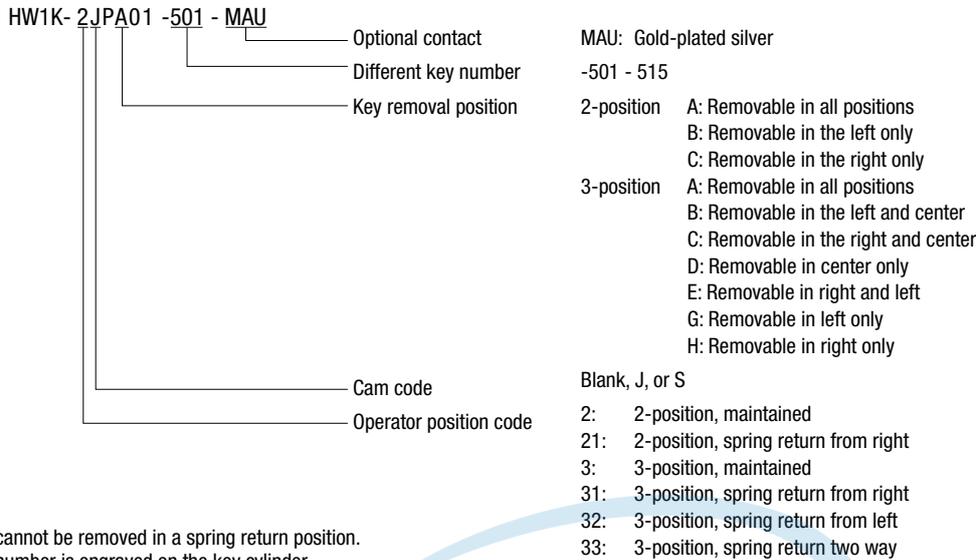


Note:

- The key cannot be removed in a spring return position.
- The key number is engraved on the key cylinder.
 (default key is not engraved with a number)

Key Selector Switches (Disc Tumbler Key) (Pages 27 to 28)

When specifying gold-plated silver contact, key removal position, and key number:

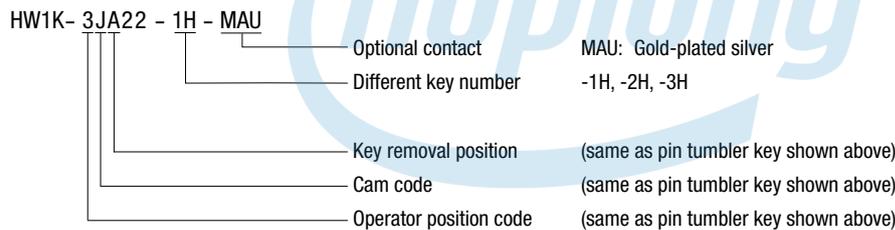


Note:

- The key cannot be removed in a spring return position.
- The key number is engraved on the key cylinder.
 (default key is not engraved with a number)

Illuminated Selector Switches (Pages 29 to 30)

When specifying gold-plated silver contact and LED operating voltage:





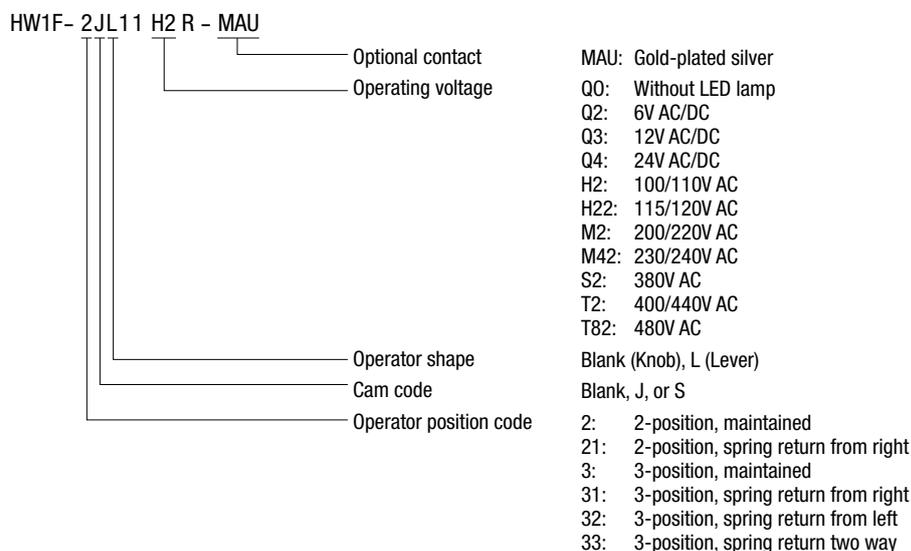


Note: Color codes for units without LED lamps: R (red), G (green), A (amber), Y (yellow), W (white), S (blue)

When using a commercially available lamp, choose a lamp with rated voltage 5 to 30V AC/DC and 1W maximum, and with the same base and shape. Make sure of correct operation before installation. The operation of HW series cannot be guaranteed when a commercially available lamp is used.

Flush / Extended / Mushroom Pushbuttons



Package Quantity: 1

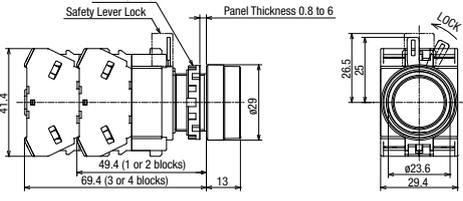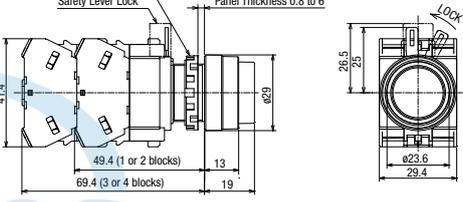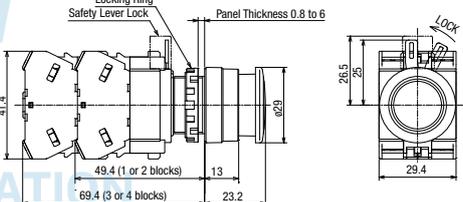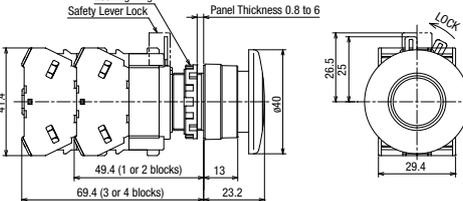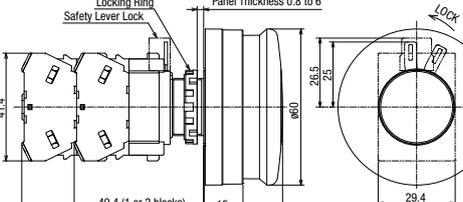Shape	Operation	Contact	Part No.	Color Code	Dimensions (mm)
Flush HW1B-M1 HW1B-A1 	Momentary	1NO	HW1B-M110*	B G R Y S W	
		1NC	HW1B-M101*		
		1NO-1NC	HW1B-M111*		
		2NO	HW1B-M120*		
		2NC	HW1B-M102*		
	Maintained	1NO	HW1B-A110*		
		1NC	HW1B-A101*		
		1NO-1NC	HW1B-A111*		
		2NO	HW1B-A120*		
		2NC	HW1B-A102*		
2NO-2NC	HW1B-A122*				
Extended HW1B-M2 HW1B-A2 	Momentary	1NO	HW1B-M210*	B G R Y S W	
		1NC	HW1B-M201*		
		1NO-1NC	HW1B-M211*		
		2NO	HW1B-M220*		
		2NC	HW1B-M202*		
	Maintained	1NO	HW1B-A210*		
		1NC	HW1B-A201*		
		1NO-1NC	HW1B-A211*		
		2NO	HW1B-A220*		
		2NC	HW1B-A202*		
2NO-2NC	HW1B-A222*				
ø29mm Mushroom HW1B-M3 HW1B-A3 	Momentary	1NO	HW1B-M310*	B G R Y S W	
		1NC	HW1B-M301*		
		1NO-1NC	HW1B-M311*		
		2NO	HW1B-M320*		
		2NC	HW1B-M302*		
	Maintained	1NO	HW1B-A310*		
		1NC	HW1B-A301*		
		1NO-1NC	HW1B-A311*		
		2NO	HW1B-A320*		
		2NC	HW1B-A302*		
2NO-2NC	HW1B-A322*				
ø40mm Mushroom HW1B-M4 HW1B-A4 	Momentary	1NO	HW1B-M410*	B G R Y S W	
		1NC	HW1B-M401*		
		1NO-1NC	HW1B-M411*		
		2NO	HW1B-M420*		
		2NC	HW1B-M402*		
	Maintained	1NO	HW1B-A410*		
		1NC	HW1B-A401*		
		1NO-1NC	HW1B-A411*		
		2NO	HW1B-A420*		
		2NC	HW1B-A402*		
2NO-2NC	HW1B-A422*				
ø60mm Mushroom HW1B-M5 	Momentary	1NO	HW1B-M510*	B G R	
		1NC	HW1B-M501*		
		1NO-1NC	HW1B-M511*		
		2NO	HW1B-M520*		
		2NC	HW1B-M502*		
		2NO-2NC	HW1B-M522*		

- Specify a color code in place of * in Part No. B (black), G (green), R (red), Y (yellow), S (blue), W (white)
- Pushbuttons with 1 or 3 contact blocks have a dummy block.
- See page 5 for other contact configurations and gold-plated silver contacts.
- Pushbuttons: M3.5 Terminal screws integrated terminal cover


Square Flush / Square Flush Pushbuttons

Package Quantity: 1

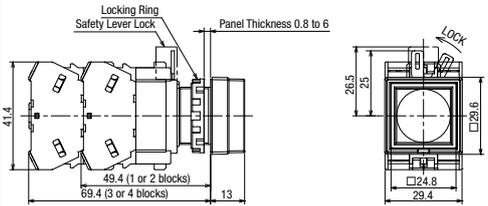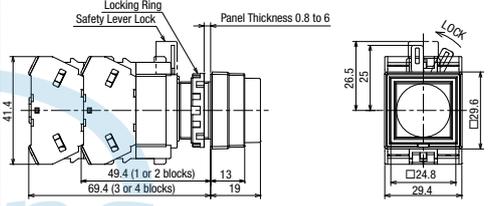Shape	Operation	Contact	Part No.	Color Code	Dimensions (mm)
Square Flush HW2B-M1 HW2B-A1 	Momentary	1NO	HW2B-M110*	B G R Y S W	
		1NC	HW2B-M101*		
		1NO-1NC	HW2B-M111*		
		2NO	HW2B-M120*		
		2NC	HW2B-M102*		
	Maintained	1NO	HW2B-A110*		
		1NC	HW2B-A101*		
		1NO-1NC	HW2B-A111*		
		2NO	HW2B-A120*		
		2NC	HW2B-A102*		
Square Extended HW2B-M2 HW2B-A2 	Momentary	1NO	HW2B-M210*	B G R Y S W	
		1NC	HW2B-M201*		
		1NO-1NC	HW2B-M211*		
		2NO	HW2B-M220*		
		2NC	HW2B-M202*		
	Maintained	2NO-2NC	HW2B-M222*		
		1NO	HW2B-A210*		
		1NC	HW2B-A201*		
		1NO-1NC	HW2B-A211*		
		2NO	HW2B-A220*		
	2NC	HW2B-A202*			
	2NO-2NC	HW2B-A222*			

- Specify a color code in place of * in Part No. B (black), G (green), R (red), Y (yellow), S (blue), W (white)
- Pushbuttons with 1 or 3 contact blocks have a dummy block.
- See page 5 for other contact configurations and gold-plated silver contacts.
- Pushbuttons: M3.5 Terminal screws




Bottom View

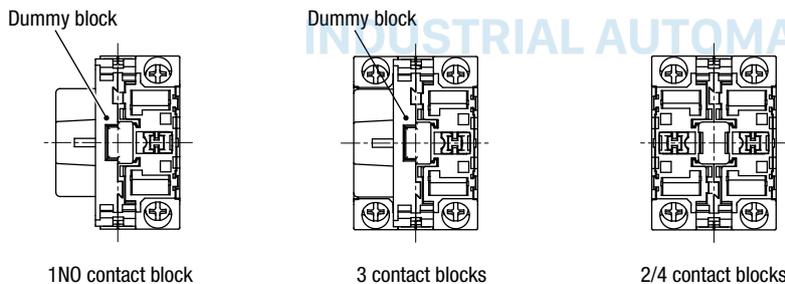

- For 1NC contact, the contact block will mount on the opposite side.
- See page 48 for wiring.
- Integrated terminal cover


Round Flush / Round Extended /Mushroom with Square Bezel

Package Quantity: 1

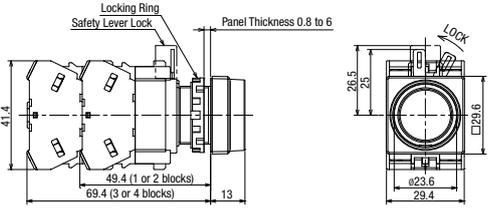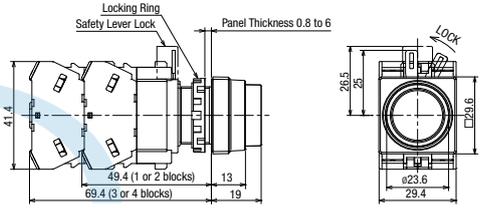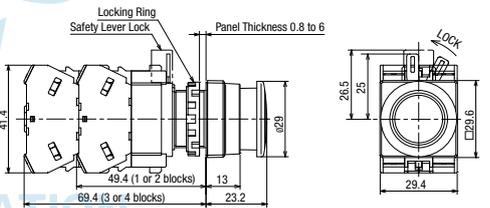Shape	Operation	Contact	Part No.	Color Code	Dimensions (mm)
Round Flush with Square Bezel HW3B-M1 HW3B-A1 	Momentary	1NO	HW3B-M110*	B G R Y S W	
		1NC	HW3B-M101*		
		1NO-1NC	HW3B-M111*		
		2NO	HW3B-M120*		
		2NC	HW3B-M102*		
		2NO-2NC	HW3B-M122*		
	Maintained	1NO	HW3B-A110*		
		1NC	HW3B-A101*		
		1NO-1NC	HW3B-A111*		
		2NO	HW3B-A120*		
		2NC	HW3B-A102*		
		2NO-2NC	HW3B-A122*		
Round Extended with Square Bezel HW3B-M2 HW3B-A2 	Momentary	1NO	HW3B-M210*	B G R Y S W	
		1NC	HW3B-M201*		
		1NO-1NC	HW3B-M211*		
		2NO	HW3B-M220*		
		2NC	HW3B-M202*		
		2NO-2NC	HW3B-M222*		
	Maintained	1NO	HW3B-A210*		
		1NC	HW3B-A201*		
		1NO-1NC	HW3B-A211*		
		2NO	HW3B-A220*		
		2NC	HW3B-A202*		
		2NO-2NC	HW3B-A222*		
ø29mm Mushroom with Square Bezel HW3B-M3 HW3B-A3 	Momentary	1NO	HW3B-M310*	B G R Y S W	
		1NC	HW3B-M301*		
		1NO-1NC	HW3B-M311*		
		2NO	HW3B-M320*		
		2NC	HW3B-M302*		
		2NO-2NC	HW3B-M322*		
	Maintained	1NO	HW3B-A310*		
		1NC	HW3B-A301*		
		1NO-1NC	HW3B-A311*		
		2NO	HW3B-A320*		
		2NC	HW3B-A302*		
		2NO-2NC	HW3B-A322*		

- Specify a color code in place of * in Part No. B (black), G (green), R (red), Y (yellow), S (blue), W (white)
- Pushbuttons with 1 or 3 contact blocks have a dummy block.
- See page 5 for other contact configurations and gold-plated silver contacts.
- Pushbuttons: M3.5 Terminal screws

Bottom View

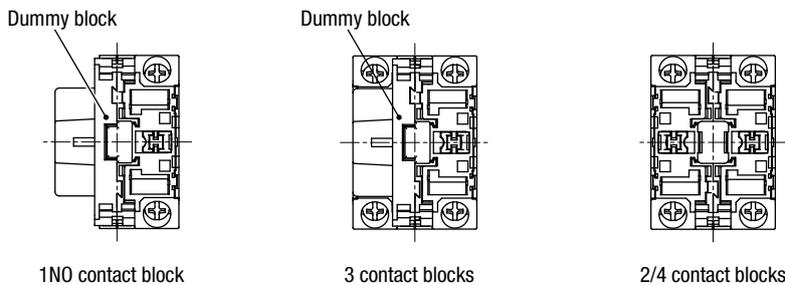

- For 1NC contact, the contact block will mount on the opposite side.
- See page 48 for wiring.
- Integrated terminal cover

Round Flush / Dome / Square Flush / Jumbo Dome Pilot Lights

Package Quantity: 1

Shape	Lamp	Operating Voltage	Part No.	Color Code
Round Flush (marking type) HW1P-1  24V AC/DC  With transformer (100/110V AC)	LED	24V AC/DC	HW1P-1Q4*	R G Y A W S PW
		100/110V AC	HW1P-1H2*	
		200/220V AC	HW1P-1M2*	
Dome HW1P-2  (24V AC/DC)  With transformer (100/110V AC)	LED	24V AC/DC	HW1P-2Q4*	R G Y A W S PW
		100/110V AC	HW1P-2H2*	
		200/220V AC	HW1P-2M2*	
Square Flush (marking type) HW2P-1  (24V AC/DC)  With transformer (100/110V AC)	LED	24V AC/DC	HW2P-1Q4*	R G Y A W S PW
		100/110V AC	HW2P-1H2*	
		200/220V AC	HW2P-1M2*	
Jumbo Dome Pilot Light (*1) HW1P-5 	LED	24V AC/DC	HW1P-5Q4*	R G Y A W S PW

- Specify a color code in place of * in Part No. R (red), G (green), Y (yellow), A (amber) W (white), S (blue), PW (pure white)
 - Pilot lights have an LED lamp installed.
 - See page 5 for other operating voltages.
 - See page 12 for bottom view.
 - See page 12 for how to specify units without LED lamps.
 - When using a commercially available lamp, choose a lamp with rated voltage 5 to 30V AC/DC and 1W maximum, and with the same base and shape. Make sure of correct operation before installation. The operation of illuminated pushbutton switches cannot be guaranteed when a commercially available lamp is used.
- *1) Jumbo dome pilot lights contain an exclusive LED. See page 3 and 42.

Dimensions

All dimensions in mm.

Pilot Lights




Round Flush

Terminal screws: M3.5, integrated terminal cover

6, 12, 24V AC/DC, Without LED lamp

100/110V AC, 200/220V AC (240V AC maximum)

110V DC, 380V AC minimum

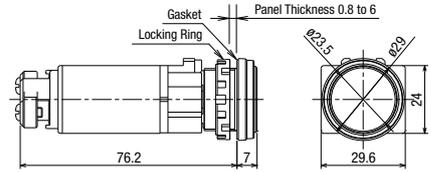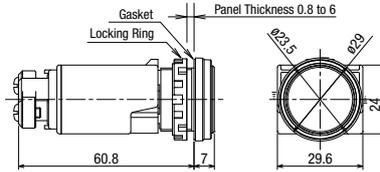




Extended

Terminal screws: M3.5, integrated terminal cover

6, 12, 24V AC/DC, Without LED lamp

100/110V AC, 200/220V AC (240V AC maximum)

110V DC, 380V AC minimum

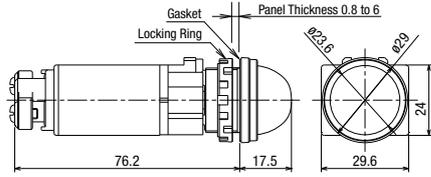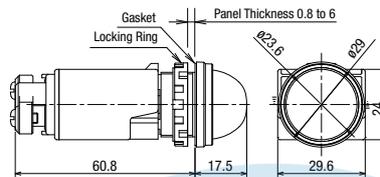




Square Flush

Terminal screws: M3.5, integrated terminal cover

6, 12, 24V AC/DC, Without LED lamp


100/110V AC, 200/220V AC (240V AC maximum)

110V DC, 380V AC minimum

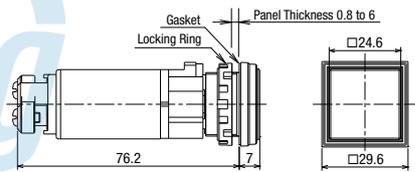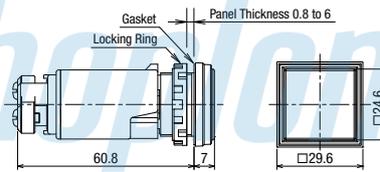

Jumbo Dome Pilot Light

Terminal screws: M3.5, integrated terminal cover

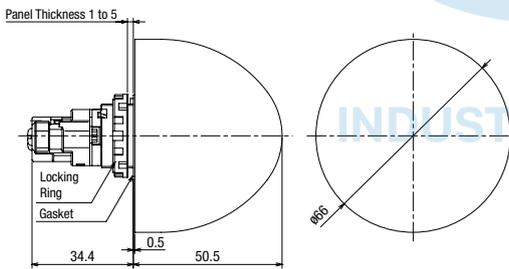


Panel Cut-Out

Mounting Centers

(Except jumbo dome)


Close mounting on 30 mm centers



When mounting 100/110V AC, 200/220V AC, 110V DC units on 30mm centers vertically and horizontally, keep the ambient temperature below 40°C.

Mounting Centers

(Jumbo dome)





Determine the minimum mounting centers in consideration of convenience for wiring.

Pilot Light Bottom View

6, 12, 24V AC/DC
Without LED lamp

100/110V AC, 200/220V, 110V DC



- For DC-DC Converter types, terminal X1 is ⊕, X2 is ⊖.
- See page 49 for wiring.

LED Round Flush / Round Extended (Marking Type)

Package Quantity: 1

Shape	Illumination	Operation	Rated Voltage	Contact Configuration	Part No.	Color Code	
Round Flush (Marking type) HW1L-M1 HW1L-A1  (24V AC/DC)  With transformer (100/110V AC)	LED	Momentary	24V AC/DC	1NO	HW1L-M110Q4*	R G Y A W S PW	
				1NC	HW1L-M101Q4*		
				1NO-1NC	HW1L-M111Q4*		
				2NO	HW1L-M120Q4*		
				2NC	HW1L-M102Q4*		
				2NO-2NC	HW1L-M122Q4*		
			100/110V AC	1NO-1NC	HW1L-M111H2*		
				2NO	HW1L-M120H2*		
				2NC	HW1L-M102H2*		
				2NO-2NC	HW1L-M122H2*		
				200/220V AC	1NO-1NC		HW1L-M111M2*
					2NO		HW1L-M120M2*
		2NC	HW1L-M102M2*				
		2NO-2NC	HW1L-M122M2*				
		Maintained	24V AC/DC		1NO	HW1L-A110Q4*	R G Y A W S PW
					1NC	HW1L-A101Q4*	
				1NO-1NC	HW1L-A111Q4*		
				2NO	HW1L-A120Q4*		
				2NC	HW1L-A102Q4*		
				2NO-2NC	HW1L-A122Q4*		
			100/110V AC	1NO-1NC	HW1L-A111H2*		
				2NO	HW1L-A120H2*		
				2NC	HW1L-A102H2*		
				2NO-2NC	HW1L-A122H2*		
200/220V AC	1NO-1NC			HW1L-A111M2*			
	2NO			HW1L-A120M2*			
	2NC	HW1L-A102M2*					
	2NO-2NC	HW1L-A122M2*					
	Round Extended (Marking type) HW1L-M2 HW1L-A2  (24V AC/DC)  With transformer (100/110V AC)	LED	Momentary	24V AC/DC	1NO	HW1L-M210Q4*	R G Y A W S PW
					1NC	HW1L-M201Q4*	
1NO-1NC					HW1L-M211Q4*		
2NO					HW1L-M220Q4*		
2NC					HW1L-M202Q4*		
2NO-2NC					HW1L-M222Q4*		
100/110V AC				1NO-1NC	HW1L-M211H2*		
				2NO	HW1L-M220H2*		
				2NC	HW1L-M202H2*		
				2NO-2NC	HW1L-M222H2*		
				200/220V AC	1NO-1NC	HW1L-M211M2*	
					2NO	HW1L-M220M2*	
2NC			HW1L-M202M2*				
2NO-2NC			HW1L-M222M2*				
Maintained			24V AC/DC		1NO	HW1L-A210Q4*	R G Y A W S PW
					1NC	HW1L-A201Q4*	
				1NO-1NC	HW1L-A211Q4*		
				2NO	HW1L-A220Q4*		
				2NC	HW1L-A202Q4*		
				2NO-2NC	HW1L-A222Q4*		
			100/110V AC	1NO-1NC	HW1L-A211H2*		
				2NO	HW1L-A220H2*		
				2NC	HW1L-A202H2*		
				2NO-2NC	HW1L-A222H2*		
	200/220VAC	1NO-1NC		HW1L-A211M2*			
		2NO		HW1L-A220M2*			
2NC		HW1L-A202M2*					
2NO-2NC		HW1L-A222M2*					

- Specify a color code in place of * in Part No. R (red), G (green), Y (yellow), A (amber) W (white), S (blue), PW (pure white)
- Illuminated pushbuttons have an LED lamp installed.
- See page 5 for other operating voltage such as 6V AC/DC, 12V AC/DC, and 110V DC.
- See page 5 for other contact configurations and gold-plated silver contacts.
- Illuminated pushbuttons of 24V AC/DC or below with 2 or 4 contact blocks have a dummy block.
- See page 19 for bottom view.
- See page 12 for how to specify units without LED lamps.
- When using a commercially available lamp, choose a lamp with rated voltage 5 to 30V AC/DC and 1W maximum, and with the same base and shape. Make sure of correct operation before installation. The operation of illuminated pushbutton switches cannot be guaranteed when a commercially available lamp is used.

LED Round Extended with Full Shroud (Marking Type)

Package Quantity: 1

Shape	Illumination	Operation	Rated Voltage	Contact	Part No.	Color Code
Round Extended with Full Shroud (Marking type) HW1L-MF2 HW1L-AF2  (24V AC/DC)  With transformer (100/110V AC)	LED	Momentary	24V AC/DC	1NO	HW1L-MF210Q4*	R G Y A W S PW
				1NC	HW1L-MF201Q4*	
1NO-1NC	HW1L-MF211Q4*					
2NO	HW1L-MF220Q4*					
2NC	HW1L-MF202Q4*					
2NO-2NC	HW1L-MF222Q4*					
100/110V AC	1NO-1NC		HW1L-MF211H2*			
	2NO		HW1L-MF220H2*			
	2NC		HW1L-MF202H2*			
	2NO-2NC		HW1L-MF222H2*			
	200/220V AC		1NO-1NC	HW1L-MF211M2*		
			2NO	HW1L-MF220M2*		
2NC		HW1L-MF202M2*				
2NO-2NC		HW1L-MF222M2*				
24V AC/DC		Maintained	24V AC/DC	1NO	HW1L-AF210Q4*	R G Y A W S PW
				1NC	HW1L-AF201Q4*	
	1NO-1NC			HW1L-AF211Q4*		
	2NO			HW1L-AF220Q4*		
	2NC			HW1L-AF202Q4*		
	2NO-2NC			HW1L-AF222Q4*		
	100/110V AC		1NO-1NC	HW1L-AF211H2*		
			2NO	HW1L-AF220H2*		
			2NC	HW1L-AF202H2*		
			2NO-2NC	HW1L-AF222H2*		
			200/220V AC	1NO-1NC	HW1L-AF211M2*	
				2NO	HW1L-AF220M2*	
2NC	HW1L-AF202M2*					
2NO-2NC	HW1L-AF222M2*					

- Specify a color code in place of * in Part No. R (red), G (green), Y (yellow), A (amber) W (white), S (blue), PW (pure white)
- Illuminated pushbuttons have an LED lamp installed.
- See page 5 for other operating voltage such as 6V AC/DC, 12V AC/DC, and 110V DC.
- See page 5 for other contact configurations and gold-plated silver contacts.
- Illuminated pushbuttons of 24V AC/DC or below with 2 or 4 contact blocks have a dummy block.
- See page 19 for bottom view.
- See page 12 for how to specify units without LED lamps.
- When using a commercially available lamp, choose a lamp with rated voltage 5 to 30V AC/DC and 1W maximum, and with the same base and shape. Make sure of correct operation before installation. The operation of illuminated pushbutton switches cannot be guaranteed when a commercially available lamp is used.

LED Square Flush / Round Flush with Square Bezel (Marking Type)

Package Quantity: 1

Shape	Illumination	Operation	Illumination	Contact	Part No.	Color Code	
Square Flush (Marking type) HW2L-M1 HW2L-A1  (24V AC/DC)  With transformer (100/110V AC)	LED	Momentary	24V AC/DC	1NO	HW2L-M110Q4*	R G Y A W S PW	
				1NC	HW2L-M101Q4*		
				1NO-1NC	HW2L-M111Q4*		
				2NO	HW2L-M120Q4*		
				2NC	HW2L-M102Q4*		
				2NO-2NC	HW2L-M122Q4*		
			100/110V AC	1NO-1NC	HW2L-M111H2*		
				2NO	HW2L-M120H2*		
				2NC	HW2L-M102H2*		
				2NO-2NC	HW2L-M122H2*		
				200/220V AC	1NO-1NC		HW2L-M111M2*
					2NO		HW2L-M120M2*
		2NC	HW2L-M102M2*				
		2NO-2NC	HW2L-M122M2*				
		Maintained	24V AC/DC		1NO	HW2L-A110Q4*	R G Y A W S PW
					1NC	HW2L-A101Q4*	
				1NO-1NC	HW2L-A111Q4*		
				2NO	HW2L-A120Q4*		
				2NC	HW2L-A102Q4*		
				2NO-2NC	HW2L-A122Q4*		
			100/110V AC	1NO-1NC	HW2L-A111H2*		
				2NO	HW2L-A120H2*		
				2NC	HW2L-A102H2*		
				2NO-2NC	HW2L-A122H2*		
200/220V AC	1NO-1NC			HW2L-A111M2*			
	2NO			HW2L-A120M2*			
	2NC	HW2L-A102M2*					
	2NO-2NC	HW2L-A122M2*					
	Round Flush with Square Bezel (Marking type) HW3L-M1 HW3L-A1  (24V AC/DC)  With transformer (100/110V AC)	LED	Momentary	24V AC/DC	1NO	HW3L-M110Q4*	R G Y A W S PW
					1NC	HW3L-M101Q4*	
1NO-1NC					HW3L-M111Q4*		
2NO					HW3L-M120Q4*		
2NC					HW3L-M102Q4*		
2NO-2NC					HW3L-M122Q4*		
100/110V AC				1NO-1NC	HW3L-M111H2*		
				2NO	HW3L-M120H2*		
				2NC	HW3L-M102H2*		
				2NO-2NC	HW3L-M122H2*		
				200/220V AC	1NO-1NC	HW3L-M111M2*	
					2NO	HW3L-M120M2*	
2NC			HW3L-M102M2*				
2NO-2NC			HW3L-M122M2*				
Maintained			24V AC/DC		1NO	HW3L-A110Q4*	R G Y A W S PW
					1NC	HW3L-A101Q4*	
				1NO-1NC	HW3L-A111Q4*		
				2NO	HW3L-A120Q4*		
				2NC	HW3L-A102Q4*		
				2NO-2NC	HW3L-A122Q4*		
			100/110V AC	1NO-1NC	HW3L-A111H2*		
				2NO	HW3L-A120H2*		
				2NC	HW3L-A102H2*		
				2NO-2NC	HW3L-A122H2*		
	200/220V AC	1NO-1NC		HW3L-A111M2*			
		2NO		HW3L-A120M2*			
2NC		HW3L-A102M2*					
2NO-2NC		HW3L-A122M2*					

- Specify a color code in place of * in Part No. R (red), G (green), Y (yellow), A (amber) W (white), S (blue), PW (pure white)
- Illuminated pushbuttons have an LED lamp installed.
- See page 5 for other operating voltage such as 6V AC/DC, 12V AC/DC, and 110V DC.
- See page 5 for other contact configurations and gold-plated silver contacts.
- Illuminated pushbuttons of 24V AC/DC or below with 2 or 4 contact blocks have a dummy block.
- See page 19 for bottom view.
- See page 12 for how to specify units without LED lamps.
- When using a commercially available lamp, choose a lamp with rated voltage 5 to 30V AC/DC and 1W maximum, and with the same base and shape. Make sure of correct operation before installation. The operation of illuminated pushbutton switches cannot be guaranteed when a commercially available lamp is used.

LED Mushroom (ø29mm) / Mushroom (ø29mm) with Square Bezel (Marking Type)

Package Quantity: 1

Shape	Illumination	Operation	Voltage	Contact	Part No.	Color Code	
ø29mm Mushroom (Marking type) HW1L-M3 HW1L-A3  (24V AC/DC)  With transformer (100/110V AC)	LED	Momentary	24V AC/DC	1NO	HW1L-M310Q4*	R G Y A W S PW	
				1NC	HW1L-M301Q4*		
				1NO-1NC	HW1L-M311Q4*		
				2NO	HW1L-M320Q4*		
				2NC	HW1L-M302Q4*		
				2NO-2NC	HW1L-M322Q4*		
			100/110V AC	1NO-1NC	HW1L-M311H2*		
				2NO	HW1L-M320H2*		
				2NC	HW1L-M302H2*		
				2NO-2NC	HW1L-M322H2*		
				200/220V AC	1NO-1NC		HW1L-M311M2*
					2NO		HW1L-M320M2*
		2NC	HW1L-M302M2*				
		2NO-2NC	HW1L-M322M2*				
		Maintained	24V AC/DC		1NO	HW1L-A310Q4*	R G Y A W S PW
					1NC	HW1L-A301Q4*	
				1NO-1NC	HW1L-A311Q4*		
				2NO	HW1L-A320Q4*		
				2NC	HW1L-A302Q4*		
				2NO-2NC	HW1L-A322Q4*		
			100/110V AC	1NO-1NC	HW1L-A311H2*		
				2NO	HW1L-A320H2*		
				2NC	HW1L-A302H2*		
				2NO-2NC	HW1L-A322H2*		
200/220V AC	1NO-1NC			HW1L-A311M2*			
	2NO			HW1L-A320M2*			
	2NC	HW1L-A302M2*					
	2NO-2NC	HW1L-A322M2*					
	ø29mm Mushroom with Square Bezel (Marking type) HW3L-M3 HW3L-A3  (24V AC/DC)  With transformer (100/110V AC)	LED	Momentary	24V AC/DC	1NO	HW3L-M310Q4*	R G Y A W S PW
					1NC	HW3L-M301Q4*	
1NO-1NC					HW3L-M311Q4*		
2NO					HW3L-M320Q4*		
2NC					HW3L-M302Q4*		
2NO-2NC					HW3L-M322Q4*		
100/110V AC				1NO-1NC	HW3L-M311H2*		
				2NO	HW3L-M320H2*		
				2NC	HW3L-M302H2*		
				2NO-2NC	HW3L-M322H2*		
				200/220V AC	1NO-1NC	HW3L-M311M2*	
					2NO	HW3L-M320M2*	
2NC			HW3L-M302M2*				
2NO-2NC			HW3L-M322M2*				
Maintained			24V AC/DC		1NO	HW3L-A310Q4*	R G Y A W S PW
					1NC	HW3L-A301Q4*	
				1NO-1NC	HW3L-A311Q4*		
				2NO	HW3L-A320Q4*		
				2NC	HW3L-A302Q4*		
				2NO-2NC	HW3L-A322Q4*		
			100/110V AC	1NO-1NC	HW3L-A311H2*		
				2NO	HW3L-A320H2*		
				2NC	HW3L-A302H2*		
				2NO-2NC	HW3L-A322H2*		
	200/220V AC	1NO-1NC		HW3L-A311M2*			
		2NO		HW3L-A320M2*			
2NC		HW3L-A302M2*					
2NO-2NC		HW3L-A322M2*					

- Specify a color code in place of * in Part No. R (red), G (green), Y (yellow), A (amber) W (white), S (blue), PW (pure white)
- Illuminated pushbuttons have an LED lamp installed.
- See page 5 for other operating voltage such as 6V AC/DC, 12V AC/DC, and 110V DC.
- See page 5 for other contact configurations and gold-plated silver contacts.
- Illuminated pushbuttons of 24V AC/DC or below with 2 or 4 contact blocks have a dummy block.
- See page 19 for bottom view.
- See page 12 for how to specify units without LED lamps.
- When using a commercially available lamp, choose a lamp with rated voltage 5 to 30V AC/DC and 1W maximum, and with the same base and shape. Make sure of correct operation before installation. The operation of illuminated pushbutton switches cannot be guaranteed when a commercially available lamp is used.

LED Mushroom (ø40mm) (Marking Type) Package Quantity: 1

Shape	Illumination	Operation	Illumination	Contact	Part No.	Color Code	
<p>(24V AC/DC)</p> <p>With transformer (100/110V AC)</p>	LED	Momentary	24V AC/DC	1NO	HW1L-M410Q4*	R G Y A W S PW	
				1NC	HW1L-M401Q4*		
				1NO-1NC	HW1L-M411Q4*		
				2NO	HW1L-M420Q4*		
				2NC	HW1L-M402Q4*		
				2NO-2NC	HW1L-M422Q4*		
			100/110V AC	1NO-1NC	HW1L-M411H2*		
				2NO	HW1L-M420H2*		
				2NC	HW1L-M402H2*		
				2NO-2NC	HW1L-M422H2*		
				200/220V AC	1NO-1NC		HW1L-M411M2*
					2NO		HW1L-M420M2*
		2NC	HW1L-M402M2*				
		2NO-2NC	HW1L-M422M2*				
		Maintained	24V AC/DC		1NO	HW1L-A410Q4*	R G Y A W S PW
					1NC	HW1L-A401Q4*	
				1NO-1NC	HW1L-A411Q4*		
				2NO	HW1L-A420Q4*		
				2NC	HW1L-A402Q4*		
				2NO-2NC	HW1L-A422Q4*		
			100/110V AC	1NO-1NC	HW1L-A411H2*		
				2NO	HW1L-A420H2*		
				2NC	HW1L-A402H2*		
				2NO-2NC	HW1L-A422H2*		
200/220V AC	1NO-1NC			HW1L-A411M2*			
	2NO			HW1L-A420M2*			
	2NC	HW1L-A402M2*					
	2NO-2NC	HW1L-A422M2*					

- Specify a color code in place of * in Part No. R (red), G (green), Y (yellow), A (Amber), W (white), S (blue), PW (pure white)
- Illuminated pushbuttons have an LED lamp installed.
- See page 5 for other operating voltage such as 6V AC/DC, 12V AC/DC, and 110V DC.
- See page 5 for other contact configurations and gold-plated silver contacts.
- Illuminated pushbuttons of 24V AC/DC or below with 2 or 4 contact blocks have a dummy block.
- See page 19 for bottom view.
- See page 12 for how to specify units without LED lamps.
- When using a commercially available lamp, choose a lamp with rated voltage 5 to 30V AC/DC and 1W maximum, and with the same base and shape. Make sure of correct operation before installation. The operation of illuminated pushbutton switches cannot be guaranteed when a commercially available lamp is used.

INDUSTRIAL AUTOMATION

Dimensions

All dimensions in mm.

Illuminated Pushbuttons (Momentary / Maintained)





Round Flush

Terminal screws: M3.5, integrated terminal cover

6, 12, 24V AC/DC, Without LED lamp

100/110V AC, 200/220V AC (240V maximum)

110V DC, 380V AC minimum

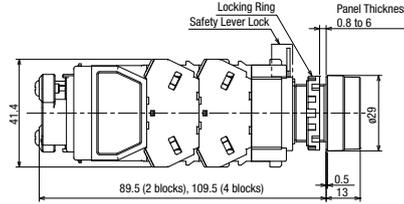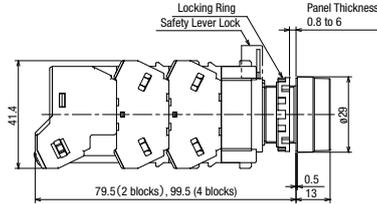





Round Extended

Terminal screws: M3.5, integrated terminal cover

6, 12, 24V AC/DC, Without LED lamp

100/110V AC, 200/220V AC (240V maximum)

110V DC, 380V AC minimum

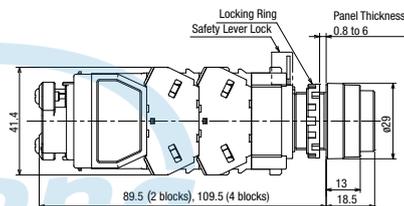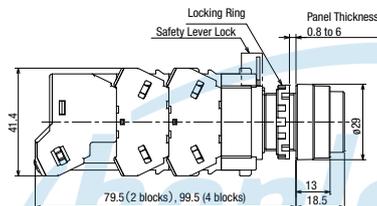





Round Extended with Full Shroud

Terminal screws: M3.5, integrated terminal cover

6, 12, 24V AC/DC, Without LED lamp

100/110V AC, 200/220V AC (240V maximum)

110V DC, 380V AC minimum

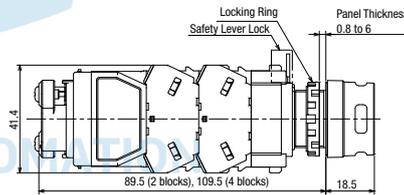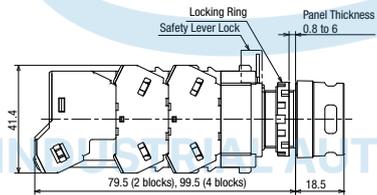





Square Flush

Terminal screws: M3.5, integrated terminal cover

6, 12, 24V AC/DC, Without LED lamp

100/110V AC, 200/220V AC (240V maximum)

110V DC, 380V AC minimum

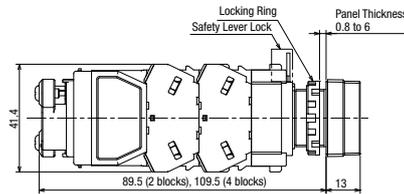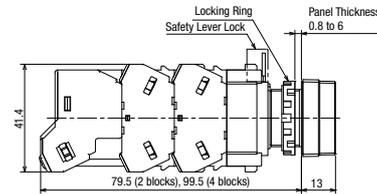





Flush with Square Bezel

Terminal screws: M3.5, integrated terminal cover

6, 12, 24V AC/DC, Without LED lamp

100/110V AC, 200/220V AC (240V maximum)

110V DC, 380V AC minimum

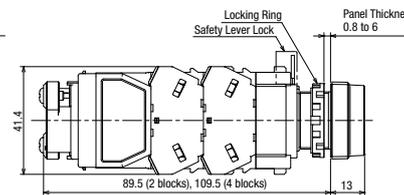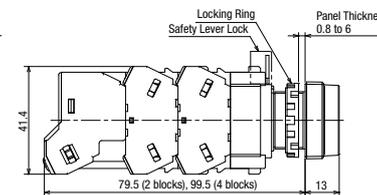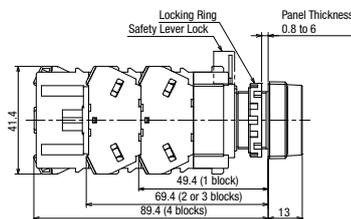

Dimensions

All dimensions in mm.

Illuminated Pushbuttons (Momentary / Maintained)


ø29mm Mushroom

Terminal screws: M3.5, integrated terminal cover

6, 12, 24V AC/DC, Without LED lamp

100/110V AC, 200/220V AC (240V maximum)

110V DC, 380V AC minimum

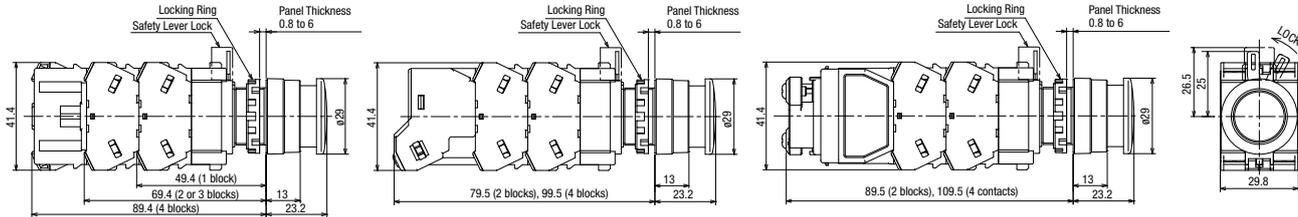


ø29mm Mushroom with Square Bezel

Terminal screws: M3.5, integrated terminal cover

6, 12, 24V AC/DC, Without LED lamp

100/110V AC, 200/220V AC (240V maximum)

110V DC, 380V AC minimum

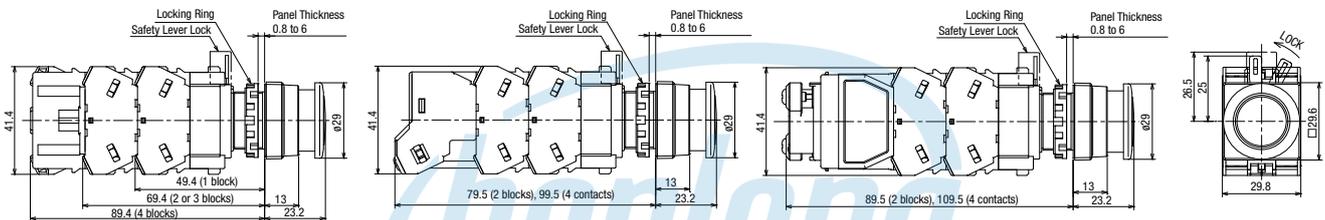


ø40mm Mushroom with Square Bezel

Terminal screws: M3.5, integrated terminal cover

6, 12, 24V AC/DC, Without LED lamp


100/110V AC, 200/220V AC (240V maximum)

110V DC, 380V AC minimum

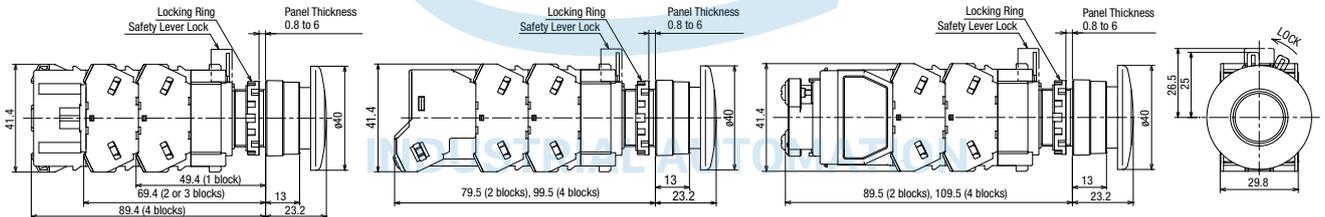

Bottom View

6, 12, 24V AC/DC, Without LED lamp

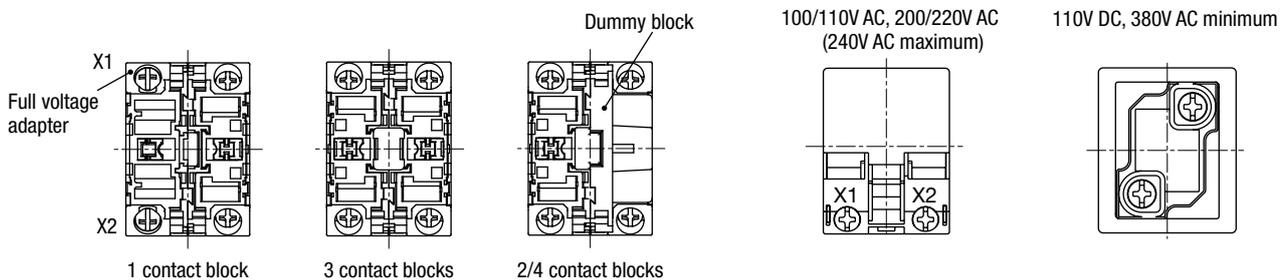

• See page 49 for wiring.

• For DC-DC Converter types, terminal X1 is ⊕, X2 is ⊖.

Dual Pushbuttons (without Pilot Light)

Specify a button color code in place of [2] and legend code in place of [3] in the Part No.

Package Quantity: 1

Shape		HW7D					
Operation	Button Style	Contact		Part No.	[2] Button Color Code	[3] Legend Code	
		Top Button	Bottom Button				
Momentary	Flush (top) Flush (bottom)	1NO	1NC	HW7D-B111001 [2][3]	GR: Green (top) Red (bottom) WB: White (top) Black (bottom)	Black: Without legend 1: I / ON (top) O / OFF (bottom)	
		1NO	1NO	HW7D-B111010 [2][3]			
		1NO-1NC	1NO-1NC	HW7D-B111111 [2][3]			
		2NO	2NC	HW7D-B112002 [2][3]			
	Flush (top) Extended (bottom)	2NO	2NO	HW7D-B112020 [2][3]			
		1NO	1NC	HW7D-B121001 [2][3]			
		1NO	1NO	HW7D-B121010 [2][3]			
		1NO-1NC	1NO-1NC	HW7D-B121111 [2][3]			
Interlock (*1)	Flush (top) Flush (bottom)	2NO	2NC	HW7D-B122002 [2][3]			
		2NO	2NO	HW7D-B122020 [2][3]			
		1NO	1NC	HW7D-B211001 [2][3]			
		1NO	1NO	HW7D-B211010 [2][3]			
	Flush (top) Extended (bottom)	1NO-1NC	1NO-1NC	HW7D-B211111 [2][3]			
		2NO	2NC	HW7D-B212002 [2][3]			
		2NO	2NO	HW7D-B212020 [2][3]			
		1NO	1NC	HW7D-B221001 [2][3]			
		1NO	1NO	HW7D-B221010 [2][3]			
		1NO-1NC	1NO-1NC	HW7D-B221111 [2][3]			
		2NO	2NC	HW7D-B222002 [2][3]			
		2NO	2NO	HW7D-B222020 [2][3]			

- For other contact arrangements, see Ordering Information on page 8 and Contact Arrangement Chart on page 23.
- Dual pushbuttons with 3 contact blocks have a dummy block.
- See page 23 for top and bottom button contact mounting positions.
- *1) Interlock: Momentary operation. When one of the buttons is pressed, the other button cannot be operated.
Do not operate top and bottom buttons at the same time. Operating the buttons at the same time may lead to malfunctions.

LED Dual Pushbuttons (with Pilot Light)

Specify a LED color code in place of [1], button color code in place of [2], and legend code in place of [3] in the Part No.

Package Quantity: 1

Shape	HW7D LED: LSTD-2* (24V AC/DC)							
	Operation	Button Style	Illumination	Contact	Part No.	LED	[2] Button Color Code	[3] Legend Code
Momentary	Flush (top) Flush (bottom)	24V AC/DC	1NO	1NC	HW7D-L111001Q4 [1][2][3]	R G A W S PW	GR: Green (top) Red (bottom) WB: White (top) Black (bottom)	Black: Without legend 1: I / ON (top) O / OFF (bottom)
			1NO	1NO	HW7D-L111010Q4 [1][2][3]			
			1NO-1NC	1NO-1NC	HW7D-L111111Q4 [1][2][3]			
			2NO	2NC	HW7D-L112002Q4 [1][2][3]			
			2NO	2NO	HW7D-L112020Q4 [1][2][3]			
	Flush (top) Extended (bottom)	24V AC/DC	1NO	1NC	HW7D-L121001Q4 [1][2][3]			
			1NO	1NO	HW7D-L121010Q4 [1][2][3]			
			1NO-1NC	1NO-1NC	HW7D-L121111Q4 [1][2][3]			
			2NO	2NC	HW7D-L122002Q4 [1][2][3]			
			2NO	2NO	HW7D-L122020Q4 [1][2][3]			
Interlock (*1)	Flush (top) Flush (bottom)	24V AC/DC	1NO	1NC	HW7D-L211001Q4 [1][2][3]			
			1NO	1NO	HW7D-L211010Q4 [1][2][3]			
			1NO-1NC	1NO-1NC	HW7D-L211111Q4 [1][2][3]			
			2NO	2NC	HW7D-L212002Q4 [1][2][3]			
			2NO	2NO	HW7D-L212020Q4 [1][2][3]			
	Flush (top) Extended (bottom)	24V AC/DC	1NO	1NC	HW7D-L221001Q4 [1][2][3]			
			1NO	1NO	HW7D-L221010Q4 [1][2][3]			
			1NO-1NC	1NO-1NC	HW7D-L221111Q4 [1][2][3]			
			2NO	2NC	HW7D-L222002Q4 [1][2][3]			
			2NO	2NO	HW7D-L222020Q4 [1][2][3]			


- LED lamp code: R (red), G (green), A (amber), W (white), S (blue), PW (pure white)
 - Only W (white) lens is available.
 - See page 6 for other operating voltage such as 100/110V AC and 200/220V AC.
 - See page 23 for other contact configurations
 - See page 6 for gold-plated silver contacts.
 - Illuminated pushbuttons of 24V AC/DC or below with 2 or 4 contact blocks have a dummy block.
 - See page 23 for top and bottom button contact mounting positions.
- *1) Interlock: Momentary operation. When one of the buttons is pressed, the other button cannot be operated.
Do not operate top and bottom buttons at the same time. Operating the buttons at the same time may lead to malfunctions.

Dimensions


All dimensions in mm.

Dual Pushbuttons


Without Pilot Light Terminal screws: M3.5, integrated terminal cover
 Flush (top), Flush (bottom)

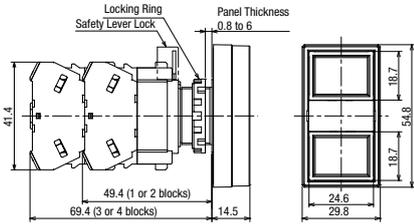


With Pilot Light Terminal screws: M3.5, integrated terminal cover
 Flush (top), Flush (bottom) (24V AC/DC)

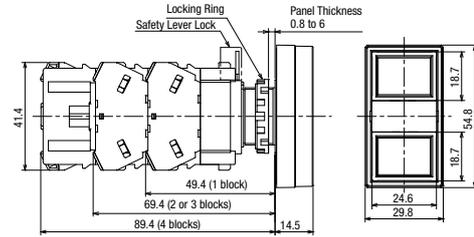


Flush (top), Extended (bottom)

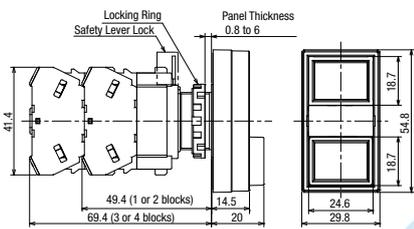


Flush (top), Flush (bottom) (240V AC maximum)

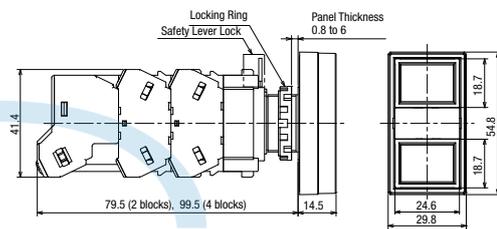

Flush (top), Extended (bottom) (with legend)

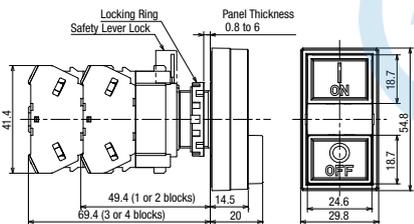


Flush (top), Flush (bottom) (380V AC minimum)

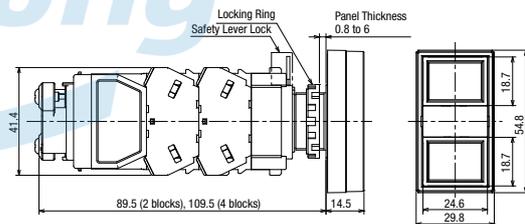

INDUSTRIAL AUTOMATION


Bottom View

Without Pilot Light

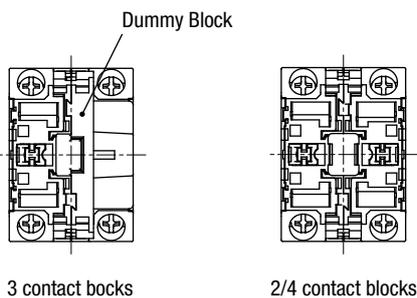


With Pilot Light


6, 12, 24V AC/DC

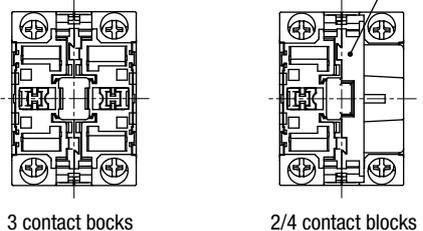

100/110V AC, 200/220V AC (240V maximum)



380V AC minimum



- See page 48 to 49 for wiring.
- Mounting position of the dummy block may change according to the contact configuration of the top and bottom buttons.

Contact Arrangement Chart


Contact			Contact Block		Top Button		Bottom Button		
Top Button	Bottom Button	Contact Code	Mounting Position	Contact	Normal	Push	Normal	Push	
1NO	1NO	1010	①	NO		●			
			②	NO				●	
1NO	1NC	1001	①	NO		●			
			②	NC			●		
1NC	1NO	0110	①	NC	●				
			②	NO				●	
1NO	1NO-1NC	1011	①	NO		●			
			②	NO				●	
			③	-	Dummy Block				
			④	NC				●	
2NO	2NO	2020	①	NO		●			
			②	NO				●	
			③	NO		●			
			④	NO				●	
2NO	1NO-1NC	2011	①	NO		●			
			②	NO				●	
			③	NO		●			
			④	NC				●	
2NO	2NC	2002	①	NO		●			
			②	NC			●		
			③	NO		●			
			④	NC			●		
1NO-1NC	1NO-1NC	1111	①	NO		●			
			②	NO				●	
			③	NC	●				
			④	NC			●		
1NO-1NC	2NC	1102	①	NO		●			
			②	NC			●		
			③	NC	●				
			④	NC			●		

- Transformer types cannot mount 3 contact blocks.
- Contact blocks ① and ③ are actuated by the top button. Contact blocks ② and ④ are actuated by the bottom button.

Contact Block		Top Button		Bottom Button	
Mounting Position	Contact	Normal	Push	Normal	Push
①	NO		●		
②	NO				●
③	NC	●			
④	NC			●	

← Button Position
← Pushbutton Operation

Contact Block Mounting Position



With Pilot Light (Full Voltage Type)



With Pilot Light (Transformer Type)

Part No. Example

HW7D-B121111GR

← Contact Code

Selector Switches (Knob Operator)

Package Quantity: 1

Shape	Knob Operator HW1S										
	Contact		Contact Block		Operator Position		Maintained (90°)	Spring Return from Right (60°)	-	-	
90° 2-position/ 60° 2-position	Contact	Mounting Position	Contact	1	2					/	/
				1	2						
	1NO (10)	①	NO		●			HW1S-2T10	HW1S-21T10		
		②	-	Dummy Block							
	1NO-1NC (11)	①	NO		●			HW1S-2T11	HW1S-21T11		
		②	NC	●							
	2NO (20)	①	NO		●			HW1S-2T20	HW1S-21T20		
		②	NO		●						
	2NO-2NC (22)	①	NO		●			HW1S-2T22	HW1S-21T22		
		②	NC	●							
③		NO		●							
④		NC	●								

Shape	Contact	Contact Block		Operator Position			Maintained	Spring Return from Right	Spring Return from Left	Spring Return Two-way
		Mounting Position	Contact	1	0	2				
45° 3-position	2NO (20)	①	NO	●			HW1S-3T20	HW1S-31T20	HW1S-32T20	HW1S-33T20
		②	NO			●				
	2NC (02)	①	NC		■		HW1S-3T02	HW1S-31T02	HW1S-32T02	HW1S-33T02
		②	NC	■						
	2NO-2NC (22N1)	①	NO	●			HW1S-3T22N1	HW1S-31T22N1	HW1S-32T22N1	HW1S-33T22N1
		②	NO			●				
		③	NC	■						
		④	NC	■						
	4NO (40)	①	NO	●			HW1S-3T40	HW1S-31T40	HW1S-32T40	HW1S-33T40
		②	NO			●				
		③	NO	●						
		④	NO			●				
	4NC (04)	①	NC		■		HW1S-3T04	HW1S-31T04	HW1S-32T04	HW1S-33T04
		②	NC	■						
		③	NC	■						
		④	NC	■						
2NO-1NC (21N1) ★☆	①	NO	●			HW1S-3JT21N1	-	-	-	
	②	NO			●					
	③	NC		●						
	④	-	Dummy Block							

- Knob operator: white indicator on black body
- On the contact arrangement marked with ★ in the table above, the rated current (load switching current) is reduced to a half of the related current of the contact block. The rated insulation voltage and the rated thermal current remain unchanged.
- For models with ☆, contacts may overlap when the operator position is changed.
- Other contact arrangements are also available. See page 32 to 34.
- Selector switches with one or three contact blocks contain a dummy block.
- See page 6 for gold-plated silver contacts.
- Turn the operator to each position accurately.

Contact Block Mounting Position



Key Selector Switches (Pin Tumbler Key)


Package Quantity: 1

Shape	No. of Positions	Contact	Contact Block		Operator Position			Cam Code	Maintained 1 2	
			Mounting Position	Contact	1	2				
 Pin Tumbler Key HW1K	90° 2-position	1NC (01)	①	NC	●			-	HW1K-2PA01	
			②	-	Dummy Block					
		1NO-1NC (11)	①	NO		●			-	HW1K-2PA11
			②	NC	●					
		2NC (02)	①	NC	●				-	HW1K-2PA02
			②	NC	●					
		2NO-1NC (21)	①	NO		●			-	HW1K-2PA21
			②	NO		●				
			③	NC	●					
			④	-	Dummy Block					
		3NC (03)	①	NC	●				-	HW1K-2PA03
			②	NC	●					
			③	NC	●					
			④	-	Dummy Block					
		2NO-2NC (22)	①	NO		●			-	HW1K-2PA22
			②	NC	●					
③	NO			●						
④	NC		●							

- Each selector key switch is supplied with two keys.
- 15 types of key numbers are available in addition to standard (500) key. See below for details.
- Spring-return type is also available. See below for details.
- Key retained position can be selected. See below for details.

Ordering Information

Example: HW1K-2JPA01-501

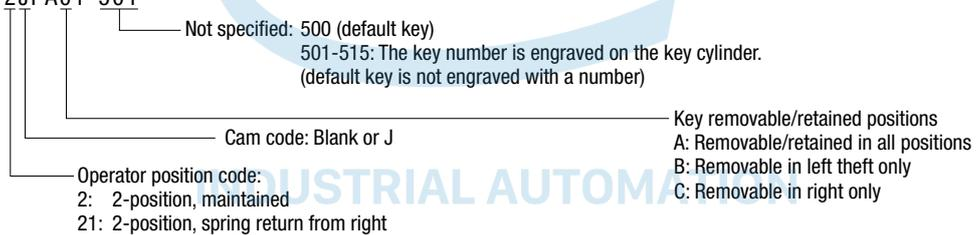

Maintained (90° 2-position)		Spring Return (60° 2-position)
		Spring return from right
Cam code: blank	Cam code: J	Cam code: blank

Key Retained Position		
A (removable in all positions) 	B (removable in left only) 	C (removable in right only)
Cam code: blank		

Key Retained Position		
A (removable in all positions) 	B (removable in left only) 	C (removable in right only)
Cam code: J		

- For more contact arrangement, see page 32 to 34.
- Key selector switches with one or three contact blocks contain a dummy block.
- See page 7 for gold-plated silver contacts.
- Turn the operator to each position accurately.

Contact Block Mounting Position



① ②: Key removal position
● ●: Key retained position

Note: The key cannot be removed in a spring return position.

Key Selector Switches (Pin Tumbler Key)

Package Quantity: 1

Shape	No. of Positions	Contact Configuration			Operator Position			Cam Code	Maintained 1 0 2	
		Contact Code	Mounting Position	Contact	1	0	2			
 Pin Tumbler Key HW1K	45° 3-position	2NC (02)	①	NC		■		-	HW1K-3PA02	
			②	NC	■					
		2NO-2NC (22N1)	①	NO	●				-	HW1K-3PA22N1
			②	NO			●			
			③	NC		■				
			④	NC	■					
		4NC (04)	①	NC		■			-	HW1K-3PA04
			②	NC	■					
			③	NC		■				
			④	NC	■					
		2NO-1NC (21N1) ★☆	①	NO	●				J	HW1K-3JPA21N1
			②	NO				●		
			③	NC			●			
			④	-	Dummy Block					
		4NC (04) ★	①	NC				●	S	HW1K-3SPA04
			②	NC	●					
③	NC					●				
④	NC		●							


- On the contact arrangement marked with ★ in the table above, the rated current (load switching current) is reduced to a half of the related current of the contact block. The rated insulation voltage and the rated thermal current remain unchanged.
- For models with ☆, contacts may overlap when the operator is changed.
- For contact block mounting position, see the figure on the right.
- Each key selector switch is supplied with two keys.
- 15 types of key numbers are available in addition to standard (500) key. See below for details.
- Spring-return type is also available. See below for details.
- Key retained position can be selected. See table below details..

Contact Block Mounting Position



Ordering Information

Example: HW1K-3SPA04-501

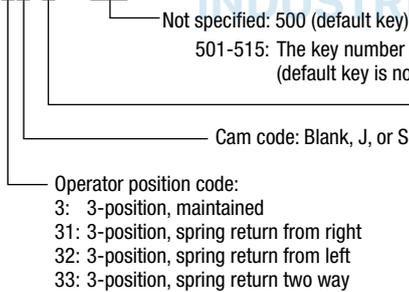

- Key removal/retained positions
- A: Removable in all positions
 - B: Removable in left and center
 - C: Removable in right and center
 - D: Removable in center only
 - E: Removable in right and left
 - G: Removable in left only
 - H: Removable in right only
- Note: The key cannot be removed in a spring return position.

Maintained (45° 3-position)	Spring Return (45° 3-position)		
Maintained 1 0 2	Spring Return from Right 1 0 2	Spring Return from Left 1 0 2	Spring Return Two-way 1 0 2
Cam code: blank, J, or S	Cam code: blank		

Key Retained Position (45° 3-position)			
A (removable in all positions) ① ②	B (removable in left and center) ① ②	C (removable in right and center) ① ②	D (removable in center only) ① ②
E (removable in right and left only) ① ②	G (removable in left only) ① ②	H (removable in right only) ① ②	

- ① ②: Key removal position
 - ① ②: Key retained position
- Note: The key cannot be removed in a spring return position.

- For more contact arrangement, see page 32 to 34.
- Key selector switches with one or three contact blocks contain a dummy block.
- See page 7 for gold-plated silver contacts.
- Turn the operator to each position accurately.

Key Selector Switches (Disc Tumbler Key)


Package Quantity: 1

No. of Positions	Disc Tumbler Key HW1K		Operator Position		Cam Code	Maintained (90°)	Spring Return from Right (60°)		
	Contact Configuration		1	2		1 2	1 2		
	Contact Code	Mounting Position	Contact						
90° 2-position/ 60° 2-position	1NO (10)	①	NO		●	-	HW1K-2A10	HW1K-21B10	
		②	-	Dummy Block					
	1NC (01)	①	NC	●			-	HW1K-2A01	HW1K-21B01
		②	-	Dummy Block					
	1NO-1NC (11)	①	NO		●		-	HW1K-2A11	HW1K-21B11
		②	NC	●					
	2NO (20)	①	NO		●		-	HW1K-2A20	HW1K-21B20
		②	NO		●				
	2NC (02)	①	NC	●			-	HW1K-2A02	HW1K-21B02
		②	NC	●					
	2NO-1NC (21)	①	NO		●		-	HW1K-2A21	HW1K-21B21
		②	NO	●					
		③	NC	●					
		④	-	Dummy Block					
	3NC (03)	①	NC	●			-	HW1K-2A03	HW1K-21B03
		②	NC	●					
		③	NC	●					
		④	-	Dummy Block					
	2NO-2NC (22)	①	NO		●		-	HW1K-2A22	HW1K-21B22
		②	NC	●					
③		NO		●					
④		NC	●						

- Each key selector switch is supplied with two keys.
- 3 types of key numbers are available in addition to standard key.
- Key retained position can be selected. See table below for key retained positions.

Ordering Information

Example: HW1K-2JA01-1H

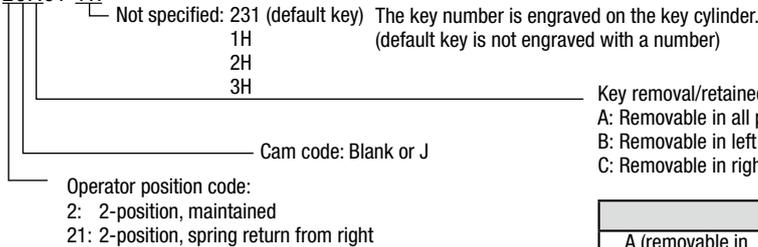

Maintained (90° 2-position)		Spring Return (60° 2-position)
Cam code: blank	Cam code: J	Cam code: blank

- For more contact arrangement, see page 32 to 34.
- Key selector switches with one or three contact blocks contain a dummy block.
- See page 7 for gold-plated silver contacts.
- Turn the operator to each position accurately.

Contact Block Mounting Position



Key removal/retained positions
A: Removable in all positions
B: Removable in left only
C: Removable in right only

Key Retained Position		
A (removable in all positions) 	B (removable in left only) 	C (removable in right only)
Cam code: blank		
Key Removal Position		
A (removable in all positions) 	B (removable in left only) 	C (removable in right only)
Cam code: J		

① ②: Key removal position
● ②: Key retained position
Note: The key cannot be removed in a spring return position.

Key Selector Switches (Disc Tumbler Key)

Package Quantity: 1

No. of Positions	Contact Configuration		Operator Position			Cam Code	Maintained	Spring Return from Right	Spring Return from Left	Spring Return Two-way	
	Contact Code	Mounting Position	Contact	1	0		2	1 0 2	1 0 2	1 0 2	1 0 2
45° 3-position	2NO (20)	①	NO	●			-	HW1K-3A20	HW1K-31B20	HW1K-32C20	HW1K-33D20
		②	NO			●					
	2NC (02)	①	NC		■	■	-	HW1K-3A02	HW1K-31B02	HW1K-32C02	HW1K-33D02
		②	NC	■	■						
	2NO-2NC (22N1)	①	NO	●			-	HW1K-3A22N1	HW1K-31B22N1	HW1K-32C22N1	HW1K-33D22N1
		②	NO			●					
		③	NC		■	■					
		④	NC	■	■						
	4NO (40)	①	NO	●			-	HW1K-3A40	HW1K-31B40	HW1K-32C40	HW1K-33D40
		②	NO			●					
		③	NO	●							
		④	NO			●					
	4NC (04)	①	NC		■	■	-	HW1K-3A04	HW1K-31B04	HW1K-32C04	HW1K-33D04
		②	NC	■	■						
		③	NC	■	■						
		④	NC	■	■						
	4NC (04) ★	①	NC	●		●	S	HW1K-3SA04	-	-	-
		②	NC	●		●					
		③	NC	●		●					
		④	NC	●		●					
2NO-1NC (21N1) ★★	①	NO	●			J	HW1K-3JA21N1	-	-	-	
	②	NO			●						
	③	NC		■	■						
	④	-	-	-	Dummy Block						

- On the contact arrangement marked with ★ in the table above, the rated current (load switching current) is reduced to a half of the related current of the contact block. The rated insulation voltage and the rated thermal current remain unchanged.
- For models with ★, contacts may overlap when the operator is changed. Each key selector switch is supplied with two keys.
- 3 types of key numbers are available in addition to standard key.
- Key retained position can be selected. See table below for key retained positions.

Contact Block Mounting Position



Ordering Information

Example: HW1K-3SA04-1H

Not specified: 231 (default key)
1H
2H
3H

The key number is engraved on the key cylinder. (default key is not engraved with a number)

Cam code: Blank or J

Operator position code:

- 3: 3-position, maintained
- 31: 3-position, spring return from right
- 32: 3-position, spring return from left
- 33: 3-position, spring return two way

Key removal/retained positions

- A: Removable in all positions
- B: Removable in left and center
- C: Removable in right and center
- D: Removable in center only
- E: Removable in right and left
- G: Removable in left only
- H: Removable in right only

Note: The key cannot be removed in a spring return position.

Maintained (45° 3-position)	Spring Return (45° 3-position)		
Maintained 1 0 2	Spring Return from Right 1 0 2	Spring Return from Left 1 0 2	Spring Return Two-way 1 0 2
Cam code: blank, J, or S	Cam code: blank		

Key Retained Position			
A (removable in all positions) ① ② ③	B (removable in left and center) ① ② ③	C (removable in right and center) ① ② ③	D (removable in center only) ① ② ③
E (removable in right and left only) ① ② ③	G (removable in left only) ① ② ③	H (removable in right only) ① ② ③	

- For more contact arrangement, see page 32 to 34.
- Key selector switches with one or three contact blocks contain a dummy block.
- See page 7 for gold-plated silver contacts.
- Turn the operator to each position accurately.

① ② ③: Key removal position

● ① ②: Key retained position

Note: The key cannot be removed in a spring return position.

LED Selector Switches (Knob Operator)


Package Quantity: 1

No. of Positions	Knob Operator HW1F										Color Code	
	Contact Configuration			Operator Position		Operating Voltage			Maintained (90°)	Spring return from right (60°)		-
90° 2-position/ 60° 2-position	Contact Code	Mounting Position	Contact	1	2					-	-	R G Y A W S PW
	1NO-1NC (11)	①	NO		●		24V AC/DC	HW1F-211Q4*	HW1F-2111Q4*			
		②	NC	●			100/110V AC	HW1F-211H2*	HW1F-2111H2*			
							200/220V AC	HW1F-211M2*	HW1F-2111M2*			
	2NO (20)	①	NO		●		24V AC/DC	HW1F-220Q4*	HW1F-2120Q4*			
		②	NO		●		100/110V AC	HW1F-220H2*	HW1F-2120H2*			
							200/220V AC	HW1F-220M2*	HW1F-2120M2*			
	2NO-2NC (22)	①	NO		●		24V AC/DC	HW1F-222Q4*	HW1F-2122Q4*			
		②	NC	●			100/110V AC	HW1F-222H2*	HW1F-2122H2*			
		③	NO		●		200/220V AC	HW1F-222M2*	HW1F-2122M2*			
		④	NC	●								

No. of Positions	Knob Operator HW1F										Color Code	
	Contact Configuration			Operator Position		Operating Voltage	Maintained	Spring return from right	Spring return from left	Spring Return Two-way		
45° 3-position	Contact Code	Mounting Position	Contact	1	0		2					R G Y A W S PW
	2NO (20)	①	NO	●			24V AC/DC	HW1F-320Q4*	HW1F-3120Q4*	HW1F-3220Q4*	HW1F-3320Q4*	
		②	NO			●	100/110V AC	HW1F-320H2*	HW1F-3120H2*	HW1F-3220H2*	HW1F-3320H2*	
							200/220V AC	HW1F-320M2*	HW1F-3120M2*	HW1F-3220M2*	HW1F-3320M2*	
	2NC (02)	①	NC		●		24V AC/DC	HW1F-302Q4*	HW1F-3102Q4*	HW1F-3202Q4*	HW1F-3302Q4*	
		②	NC		●		100/110V AC	HW1F-302H2*	HW1F-3102H2*	HW1F-3202H2*	HW1F-3302H2*	
							200/220V AC	HW1F-302M2*	HW1F-3102M2*	HW1F-3202M2*	HW1F-3302M2*	
	2NO-2NC (22N1)	①	NO	●			24V AC/DC	HW1F-322N1Q4*	HW1F-3122N1Q4*	HW1F-3222N1Q4*	HW1F-3322N1Q4*	
		②	NO			●	100/110V AC	HW1F-322N1H2*	HW1F-3122N1H2*	HW1F-3222N1H2*	HW1F-3322N1H2*	
		③	NC		●		200/220V AC	HW1F-322N1M2*	HW1F-3122N1M2*	HW1F-3222N1M2*	HW1F-3322N1M2*	
		④	NC		●							
	4NO (40)	①	NO	●			24V AC/DC	HW1F-340Q4*	HW1F-3140Q4*	HW1F-3240Q4*	HW1F-3340Q4*	
		②	NO			●	100/110V AC	HW1F-340H2*	HW1F-3140H2*	HW1F-3240H2*	HW1F-3340H2*	
		③	NO			●	200/220V AC	HW1F-340M2*	HW1F-3140M2*	HW1F-3240M2*	HW1F-3340M2*	
		④	NO			●						
	4NC (04)	①	NC		●		24V AC/DC	HW1F-304Q4*	HW1F-3104Q4*	HW1F-3204Q4*	HW1F-3304Q4*	
		②	NC		●		100/110V AC	HW1F-304H2*	HW1F-3104H2*	HW1F-3204H2*	HW1F-3304H2*	
		③	NC		●		200/220V AC	HW1F-304M2*	HW1F-3104M2*	HW1F-3204M2*	HW1F-3304M2*	
		④	NC		●							

- Specify a color code in place of * in the Part No. R (red), G (green), Y (yellow), A (amber), W (white), S (blue), PW (pure white)
- See page 7 for other operating voltage such as 6V AC/DC and 12V AC/DC.
- Illuminated selector switches of 24V AC/DC or below with 2 or 4 contact blocks have a dummy block.
- See page 32 to 34 for other contact arrangements.
- See page 7 for gold-plated silver contacts.
- Turn the operator to each position accurately.
- See page 12 for how to specify units without LED lamps.
- When using a commercially available lamp, choose a lamp with rated voltage 5 to 30V AC/DC and 1W maximum, and with the same base and shape. Make sure of correct operation before installation. The operation of illuminated pushbutton switches cannot be guaranteed when a commercially available lamp is used.

Contact Block Mounting Position

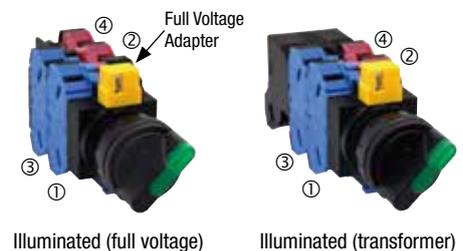

LED Selector Switches (Lever Operator)


Package Quantity: 1

No. of Positions	Lever Operator HW1F□L		Operator Position		Operating Voltage	Maintained (90°)	Spring Return from Right (60°)	-	-	Color Code	
	Contact Code	Contact Block	Mounting Position	Contact							1
90° 2-position/ 60° 2-position	1NO-1NC (11)	① NO	② NC	●		24V AC/DC	HW1F-2L11Q4*	HW1F-21L11Q4*	/	/	R G Y A W S PW
				●		100/110V AC	HW1F-2L11H2*	HW1F-21L11H2*			
						200/220V AC	HW1F-2L11M2*	HW1F-21L11M2*			
	2NO (20)	① NO	② NO	●		24V AC/DC	HW1F-2L20Q4*	HW1F-21L20Q4*			
				●		100/110V AC	HW1F-2L20H2*	HW1F-21L20H2*			
						200/220V AC	HW1F-2L20M2*	HW1F-21L20M2*			
	2NO-2NC (22)	① NO	② NC	●		24V AC/DC	HW1F-2L22Q4*	HW1F-21L22Q4*			
				●		100/110V AC	HW1F-2L22H2*	HW1F-21L22H2*			
				●		200/220V AC	HW1F-2L22M2*	HW1F-21L22M2*			
				●							

45° 3-position	Contact Code	Contact Block	Operator Position	Operating Voltage	Maintained	Spring Return from Right	Spring Return from Left	Spring Return Two-way	Color Code	
										Mounting Position
45° 3-position	2NO (20)	① NO	② NO	●		24V AC/DC	HW1F-3L20Q4*	HW1F-31L20Q4*	HW1F-32L20Q4*	HW1F-33L20Q4*
				●		100/110V AC	HW1F-3L20H2*	HW1F-31L20H2*	HW1F-32L20H2*	HW1F-33L20H2*
						200/220V AC	HW1F-3L20M2*	HW1F-31L20M2*	HW1F-32L20M2*	HW1F-33L20M2*
	2NC (02)	① NC	② NC	●		24V AC/DC	HW1F-3L02Q4*	HW1F-31L02Q4*	HW1F-32L02Q4*	HW1F-33L02Q4*
				●		100/110V AC	HW1F-3L02H2*	HW1F-31L02H2*	HW1F-32L02H2*	HW1F-33L02H2*
						200/220V AC	HW1F-3L02M2*	HW1F-31L02M2*	HW1F-32L02M2*	HW1F-33L02M2*
	2NO-2NC (22N1)	① NO	② NC	●		24V AC/DC	HW1F-3L22N1Q4*	HW1F-31L22N1Q4*	HW1F-32L22N1Q4*	HW1F-33L22N1Q4*
				●		100/110V AC	HW1F-3L22N1H2*	HW1F-31L22N1H2*	HW1F-32L22N1H2*	HW1F-33L22N1H2*
				●		200/220V AC	HW1F-3L22N1M2*	HW1F-31L22N1M2*	HW1F-32L22N1M2*	HW1F-33L22N1M2*
				●						
	4NO (40)	① NO	② NO	●		24V AC/DC	HW1F-3L40Q4*	HW1F-31L40Q4*	HW1F-32L40Q4*	HW1F-33L40Q4*
				●		100/110V AC	HW1F-3L40H2*	HW1F-31L40H2*	HW1F-32L40H2*	HW1F-33L40H2*
●					200/220V AC	HW1F-3L40M2*	HW1F-31L40M2*	HW1F-32L40M2*	HW1F-33L40M2*	
●										
4NC (04)	① NC	② NC	●		24V AC/DC	HW1F-3L04Q4*	HW1F-31L04Q4*	HW1F-32L04Q4*	HW1F-33L04Q4*	
			●		100/110V AC	HW1F-3L04H2*	HW1F-31L04H2*	HW1F-32L04H2*	HW1F-33L04H2*	
			●		200/220V AC	HW1F-3L04M2*	HW1F-31L04M2*	HW1F-32L04M2*	HW1F-33L04M2*	
			●							

- Specify a color code in place of * in the Part No. R (red), G (green), Y (yellow), A (amber), W (white), S (blue), PW (pure white)
- See page 7 for other operating voltage such as 6V AC/DC, 12V AC/DC, and 110V DC.
- Illuminated selector switches of 24V AC/DC or below with 2 or 4 contact blocks have a dummy block.
- See page 32 to 34 for other contact arrangements.
- See page 7 for gold-plated silver contacts.
- Turn the operator to each position accurately.
- See page 12 for how to specify units without LED lamps.
- When using a commercially available lamp, choose a lamp with rated voltage 5 to 30V AC/DC and 1W maximum, and with the same base and shape. Make sure of correct operation before installation. The operation of illuminated pushbutton switches cannot be guaranteed when a commercially available lamp is used.

Contact Block Mounting Position

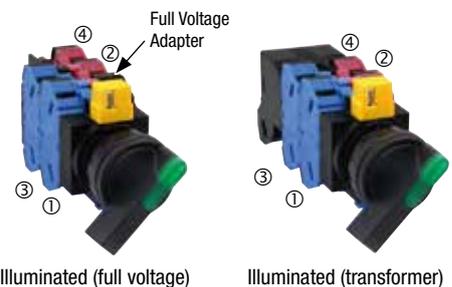


Dimensions

Selector Switch (Knob Operator)

Terminal Screws M3.5

Integrated Terminal Cover

All dimensions in mm.

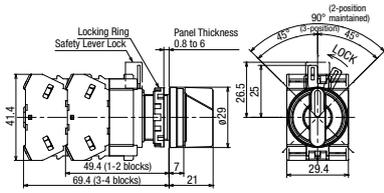



Key Selector Switch (Knob Operator)

Terminal Screws M3.5

Integrated Terminal Cover

Disc Tumbler Type

Pin Tumbler Type

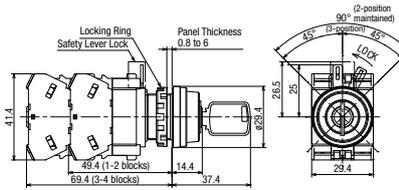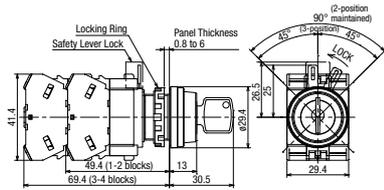

Illuminated Selector Switch (Knob Operator)




Terminal Screws M3.5

Integrated Terminal Cover

6, 12, 24V AC/DC, Without LED lamp

100/110V AC, 200/220V AC (240V AC maximum)

110V DC, 380V AC minimum

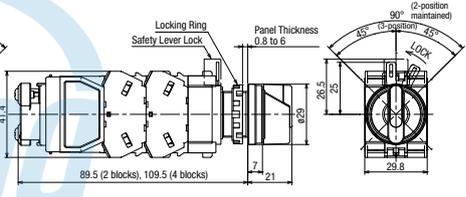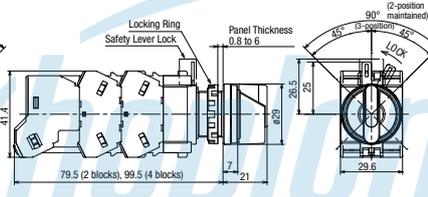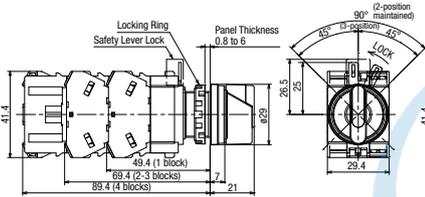

Illuminated Selector Switch (Lever Operator)




Terminal Screws M3.5

Integrated Terminal Cover

6, 12, 24V AC/DC, Without LED lamp

100/110V AC, 200/220V AC (240V AC maximum)

110V DC, 380V AC minimum

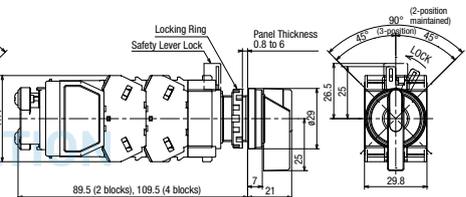
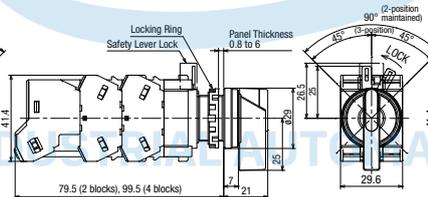
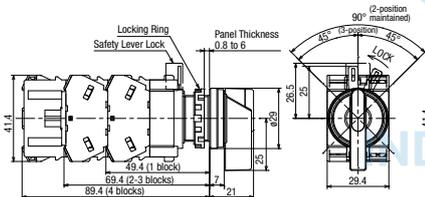


Bottom View

Non-illuminated

Dummy Block

Dummy Block



1 contact block

3 contact blocks

2/4 contact blocks






Illuminated

6, 12, 24V AC/DC, Without LED lamp

100/110V AC, 200/220V AC (240V AC maximum)

110V DC, 380V AC minimum

Dummy Block



1 contact block

3 contact blocks

2/4 contact blocks

• For DC-DC Converter types, terminal X1 is ⊕, X2 is ⊖.

Selector Switch Contact Arrangement

90° 2-position (Spring Return 60° 2-position) <Maintained/Spring Return from Right>

Contact Code	Contact Block		Operator Operation and Circuit Availability						Cam Code	Operator Availability				
			Maintained			Spring Return from Right				Knob/ Lever	Pin Tumbler	Disc Tumbler	Illuminated	
	Knob/ Lever	Key	Illuminated	Knob/ Lever	Key	Illuminated	6, 12, 24V AC/DC	100, 200V AC						
	Mounting Position	Contact	Operator Position		Operator Position									
1			2	1	2									
1NO (10)	①	NO		●										
	②	—	Dummy Block		Dummy Block			×	×	×	×		—	
1NC (01)	①	NC	●		●									
	②	—	Dummy Block		Dummy Block			×	×	×	×		—	
1NO-1NC (11)	①	NO		●										
	②	NC	●		●									×
2NO (20)	①	NO		●										
	②	NO		●										×
2NC (02)	①	NC	●		●									
	②	NC	●		●									×
2NO-2NC (22)	①	NO		●										
	②	NC	●		●									
	③	NO		●										×
	④	NC	●		●									×
3NO-1NC (31N1)	①	NC	●		●									
	②	NO		●										×
	③	NO		●										×
	④	NO		●										×
4NO (40)	①	NO		●										
	②	NO		●										×
	③	NO		●										×
	④	NO		●										×
1NO-1NC ★ (7S)	①	EM	■		■									
	②	LB	■		■									×
3NC (03)	①	NC	●		●									
	②	NC	●		●									
	③	NC	●		●									—
	④	—	Dummy Block		Dummy Block			×	×	×	×		—	
2NO-1NC (21)	①	NO		●										
	②	NC	●		●									
	③	NO		●										—
	④	—	Dummy Block		Dummy Block			×	×	×	×		—	

90° 2-position Cam Reversed (Maintained)

Contact Code	Contact Block		Operator Operation and Circuit Availability				Cam Code	Operator Availability						
			Maintained					Knob/ Lever	Pin Tumbler	Disc Tumbler	Illuminated			
	Knob/Key/Illuminated				Operator Position	6, 12, 24V AC/DC					100, 200V AC			
	Mounting Position	Contact	2	1										
1			2											
2NC (02)	①	NC		●										
	②	NC		●										×
3NC (03)	①	NC		●										
	②	NC		●										
	③	NC		●										—
	④	—	Dummy Block					×	×	×	×		—	

• On the contact arrangement marked with ★ in the table above, the rated current (load switching current) is reduced to a half of the related current of the contact block. The rated insulation voltage and the rated thermal current remain unchanged.

45° 3-position

<Maintained>

Contact Code	Contact Block		Operator Position			Circuit Availability			Cam Code	Operator Availability				
	Mounting Position	Contact	1	0	2	Knob/ Lever	Key	Illuminated		Knob/ Lever	Pin Tumbler	Disc Tumbler	Illuminated	
													6, 12, 24V AC/DC	100, 200V AC
1NO-1NC (11N1) ★ ☆	①	NC		●					J	x	x	x	x	x
	②	NO			●	x	x	x						
4NC (04) ★	①	NC			●				S	x	x	x	x	x
	②	NC	●			x	x	x						
	③	NC			●									
	④	NC	●											
2NO-1NC (21N1) ★ ☆	①	NO	●						J	x	x	x	x	-
	②	NO			●	x	x	x						
	③	NC		●										
	④	-	-	Dummy Block										

45° 3-position

<Maintained/Spring Return from Right/Spring Return from Left/Spring Return Two-way>

Contact Code	Contact Block		Operator Position			Circuit Availability			Cam Code	Operator Availability				
	Mounting Position	Contact	1	0	2	Knob/ Lever	Key	Illuminated		Knob/ Lever	Pin Tumbler	Disc Tumbler	Illuminated	
													6, 12, 24V AC/DC	100, 200V AC
1NO-1NC (11)	①	NO	●			x	x	x	-	x	x	x	x	x
	②	NC		■										
1NO-1NC (11N1)	①	NC		■		x	x	x	-	x	x	x	x	x
	②	NO			●									
2NO (20)	①	NO	●			x	x	x	-	x	x	x	x	x
	②	NO			●									
2NC (02)	①	NC		■		x	x	x	-	x	x	x	x	x
	②	NC		■										
2NO-2NC (22N1)	①	NO	●			x	x	x	-	x	x	x	x	x
	②	NO			●									
	③	NC		■										
	④	NC		■										
2NO-2NC (22N2)	①	NC		■		x	x	x	-	x	x	x	x	x
	②	NO			●									
	③	NC		■										
	④	NO			●									
4NO (40)	①	NO	●			x	x	x	-	x	x	x	x	x
	②	NO			●									
	③	NO	●											
	④	NO			●									
4NC (04)	①	NC		■		x	x	x	-	x	x	x	x	x
	②	NC		■										
	③	NC		■										
	④	NC		■										

- On the contact arrangement marked with ★ in the table above, the rated current (load switching current) is reduced to a half of the related current of the contact block. The rated insulation voltage and the rated thermal current remain unchanged.
- For models with ☆, contacts may overlap when the operator is changed.

45° 3-position

Contact Code	Contact Block		Operator Position				Maintained	Cam Code
			1	2	3	4	Knob Operator	
★ ☆ 1NO-2NC (12)	①	NO	●				x	-
	②	NC		●				
	③	NC			●			
	④	-	Dummy Block					
1NO-3NC (13N6)	①	LB	■				x	-
	②	NC		●				
	③	NC			●			
	④	NO				●		
★ ☆ 2NO-2NC (22N3)	①	NO	●				x	-
	②	NC		●				
	③	NC			●			
	④	NO				●		


30° 5-position

Contact Code	Contact Block		Operator Position					Maintained	Cam Code
			1	2	3	4	5	Knob Operator	
★ ☆ 2NO-2NC (22N3)	①	NO	●					x	-
	②	NC		●					
	③	NC				●			
	④	NO					●		


- On the contact arrangement marked with ★ in the table above, the rated current (load switching current) is reduced to a half of the related current of the contact block. The rated insulation voltage and the rated thermal current remain unchanged.
- For models with ☆, contacts may overlap when the operator is changed.

Part No. Development


Example 1: Knob Operator 2-position

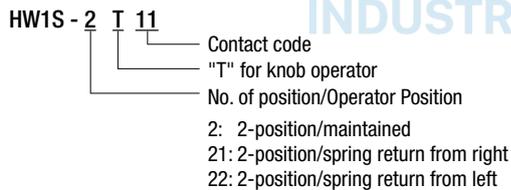


Example 2: Key Selector 3-position

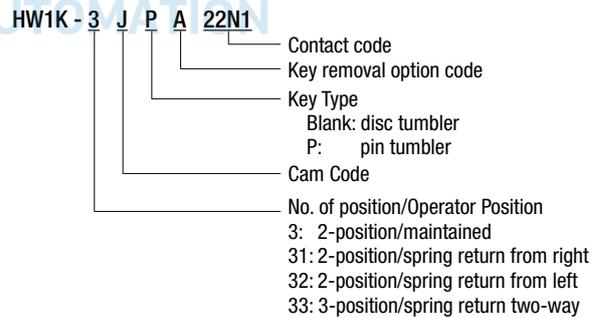

Example 3: Illuminated Selector 3-position

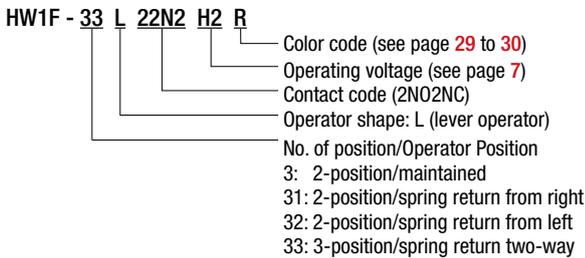

Contact Block Mounting Position



Illuminated Selector (Full Voltage)



Illuminated Selector (Transformer)



Non-illuminated Selector

Pushbutton Selectors

Package Quantity: 1


Shape	Circuit Category	Contact Code	Contact Block		Normal		Depressed		Ring Operator	Button Color Code
			Mounting Position	Contact	Normal	Depressed	Normal	Depressed	Part No.	
	A	1NO-1NC (11)	①	NO		●		●	HW1R-2A11*	B G R Y S W
			②	NC	●					
		2NO (20)	①	NO		●		●	HW1R-2A20*	
			②	NO		●	—			
		2NO-2NC (22)	①	NO		●		●	HW1R-2A22*	
			②	NC	●					
	③		NO		●		●			
	D	2NO (20)	①	NO		●	—	HW1R-2D20*		
			②	NO		●	●			
		2NO-2NC (22N1)	①	NO		●		●	HW1R-2D22N1*	
			②	NO		●	—			
			③	NC	●		—	—		
			④	NC	—	—	—	●		
	E	★ 2NO-2NC (22N1)	①	NO		●		HW1R-2E22N1*		
			②	NO		●	●			
			③	NC		—	—		—	
			④	NC	—	—	—		—	
	F	★ ☆ 2NO-2NC (22N1)	①	NO		●		HW1R-2F22N1*		
			②	NO		●	●			
			③	NC		●				
			④	NC	●					
	N	★ ☆ 2NO-2NC (22N2)	①	NC		●	●	HW1R-2N22N2*		
			②	NO		●	●			
			③	NC		●	●			
④			NO		●	●				
T	2NO-2NC (22N1)	①	NO		●	●	Blocked HW1R-2T22N1*			
		②	NO		●	●				
		③	NC	●						
		④	NC	●						

- Specify a button color code in place of * in the Part No. B (black), G (green), R (red), Y (yellow), S (blue), W (white)
- When operating the pushbutton selector, do not turn the operator ring or the lock lever while the button is depressed. Otherwise the pushbutton selector may be damaged.
- On the contact arrangement marked page with ★ in the table above, the rated current (load switching current) is reduced to a half of the related current of the contact block. The rated insulation voltage and the rated thermal current remain unchanged.
- For models with ☆, contacts may overlap when the operator is changed.

Dimensions

All dimensions in mm.

Contact Block Mounting Position

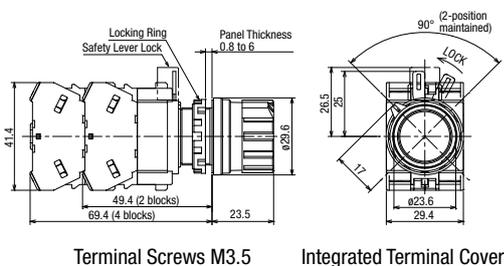

• See page 31 for the bottom view.



Mounting Position	Contact	Left		Right	
		Normal	Push	Normal	Push
①	NO				●
②	NO		●		
③	NC			●	
④	NC	●			

← Ring Position
 ← Button

Mono-Lever Switches

Package Quantity: 1

Shape	Positions	Part No. (Ordering No.)
 HW1M Standard Lever	2-position	HW1M-1010-20
		HW1M-2020-20
		HW1M-0101-20
		HW1M-0202-20
	4-position	HW1M-0101-40
		HW1M-0202-40
 HW1M-L Interlocking Lever	2-position	HW1M-1111-22N9
		HW1M-2222-22N9
		HW1M-L1010-20
		HW1M-L2020-20
	4-position	HW1M-L0101-20
		HW1M-L0202-20
		HW1M-L0101-40
		HW1M-L0202-40
		HW1M-L1111-22N9
		HW1M-L2222-22N9

• On all mono-lever switches, the rated current (load switching current) is reduced to a half of the rated current of the contact block.
The rated insulation voltage and the rated thermal current remain unchanged.

Contact Arrangement Chart

2-position (Right/Left)

Contact Code	Contact Block		Lever Operator Position		
	Mounting Position	Contact	Left	Center	Right
20	①	NO	●		
	②	NO			●
40	①	NO	●		
	②	NO			●
	③	NO	●		
	④	NO			●


2-position (Up/Down)

Contact Code	Contact Block		Lever Operator Position		
	Mounting Position	Contact	Left	Center	Right
20	①	NO	●		
	②	NO			●
40	①	NO	●		
	②	NO			●
	③	NO	●		
	④	NO			●


4-position

Contact Code	Contact Block		Lever Operator Position				
	Mounting Position	Contact	Down	Left	Center	Up	Right
22N9	①	NC					●
	②	NC	●				
	③	NO		●			
	④	NO				●	

Part No. Development

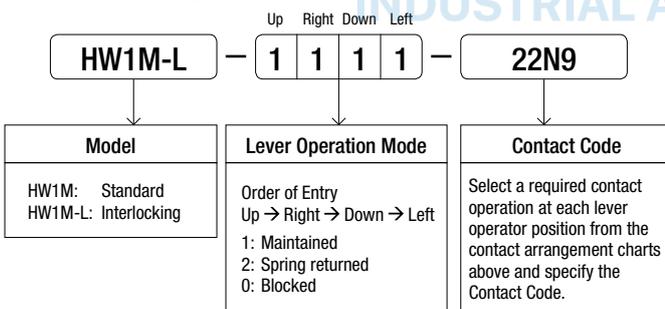


Contact Block Mounting Position and Lever Operation Position

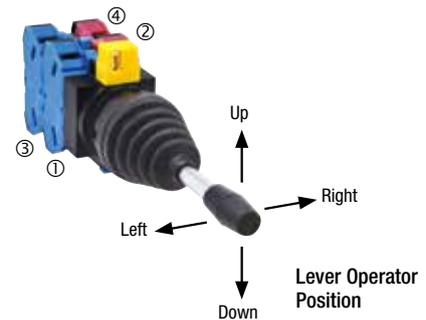

• The lever operator of the interlocking type HW1M-L is locked only in the center position. Pull on the interlocking lever before operating the lever up/down/right/left.


Dimensions

Standard Lever

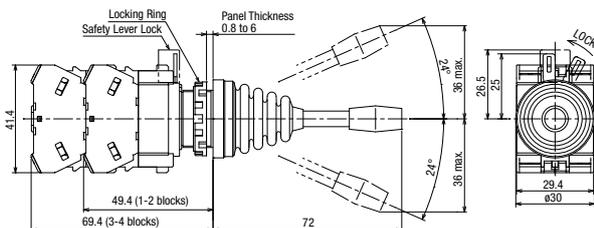

Interlocking Lever

All dimensions in mm.

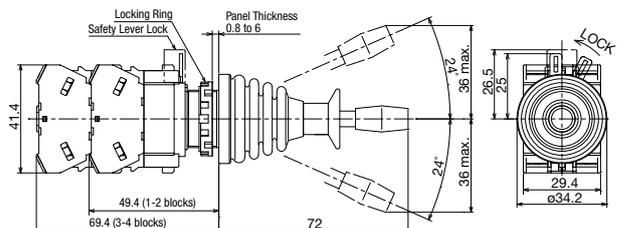

Terminal Screws M3.5 Integrated Terminal Cover
• See page 31 for the bottom view.

Nameplates

Package Quantity: 1

Description	Legend	Material	Part No.	Ordering No.	Package Quantity	Dimensions (mm)
HWAM	Order marking plate (round) separately.	Plastic (black)	HWAM	HWAM	1	HWNP-□ marking plate (sold separately) is necessary. (Marking Plate)
				HWAMPN10	10	
HWAQ	Order marking plate (square) separately.	Plastic (black)	HWAQ	HWAQ	1	HWNP-□ marking plate (sold separately) is necessary. (Marking Plate)
				HWAQPN10	10	
HWAS	Blank	Plastic (black)	HWAS-0	HWAS-0	1	
				HWAS-0PN10	10	

• Nameplates cannot be used on HW series control stations (HW1X).

Marking Plates for HWAM/HWAQ

Description	Material	Part No.	Ordering No.	Package Quantity	Dimensions (mm)
HWNP	Aluminum (black) Thickness = 1.0mm	HWNP-□	HWNP-□	1	White legend on black background. Engraving area: W25×H7
			HWNP-□PN10	10	









• Specify a legend code in place of □ in the Ordering No.

Legends





Code	Legend
0	(blank)
1	ON
2	OFF
3	START
4	STOP
31	OFF-ON
35	HAND-AUTO
53	HAND-OFF-AUTO

• See page 47 for how to install nameplates/markings plates, and how to remove marking plates.

Accessories

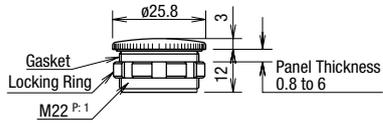Shape	Material	Part No.	Ordering No.	Package Quantity	Dimensions (mm)
 <p>Locking Ring Wrench</p>	Metal (brass) (weight: approx. 150g)	MW9Z-T1	MW9Z-T1	1	<ul style="list-style-type: none"> Used to tighten the locking ring when installing the HW switch onto a panel. 
 <p>Lamp Holder Tool</p>	Nitrile rubber (black)	OR-55	OR-55	1	<ul style="list-style-type: none"> Used to install and remove the LED lamps. See page 44 to 55 for how to install. Ⓐ : BA9S 
 <p>Contact Block Removal Tool</p>	Zinc-plated metal Nitril rubber	TW-KC1	TW-KC1	1	<ul style="list-style-type: none"> Used to remove the contact block and transformer, and also to install/remove the pilot light and illuminated pushbutton lens. See page 45. 
 <p>Anti-rotation Ring</p>	Ring: polyamide Gasket: nitril rubber	HW9Z-RL	HW9Z-RLPN10	10	<ul style="list-style-type: none"> Used to prevent the operator from turning. Generally used when using no nameplates on selector switches and pushbutton selectors. 
 <p>Rubber Mounting Hole Plug</p>	Nitril rubber (black)	OB-31	OB-31PN05	5	<ul style="list-style-type: none"> Used to plug the unused ø22.2 mm mounting holes. Degree of protection: IP65 (round hole) IP40 (with anti-rotation function) 
 <p>Rubber Mounting Hole Plug</p>	Plug: chrome-plated zinc diecast Locking ring: polyamide Gasket: nitril rubber	LW9Z-BM	LW9Z-BM	1	<ul style="list-style-type: none"> Used to plug the unused ø22.2 mm mounting holes. Degree of protection: IP66 (round hole) IP40 (with anti-rotation function) Tightening torque: 1.2 N·m 
 <p>Metallic Mounting Hole Plug</p>	Polyamide	LW9Z-BP1	LW9Z-BP1	1	<ul style="list-style-type: none"> Used to plug the unused ø22.2 mm mounting holes. Degree of protection: IP65 Tightening torque: 2.0 N·m 
 <p>Barrier</p>	Polyamide	HW-VU1	HW-VU1PN10	10	<ul style="list-style-type: none"> Used to prevent contact between adjacent lead wires when units are mounted closely (see page 48 for details). Barriers should always be used in close mounting. 


Accessories

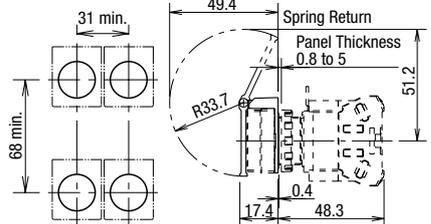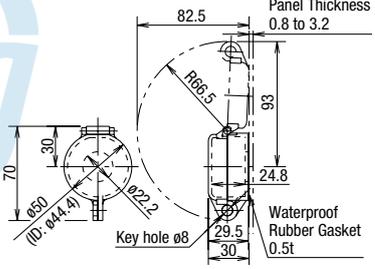Shape		Material	Part No.	Ordering No.	Package Quantity	Dimensions (mm)
	Spring Return	Guard: polyacetal Cover: polyarylate Gasket: nitril rubber	HW9Z-K1	HW9Z-K1	1	<ul style="list-style-type: none"> Used to prevent inadvertent operation for flush pushbuttons and illuminated pushbuttons. IP65 Maintained type stops at 90° and 180°. 
	Maintained		HW9Z-K11	HW9Z-K11	1	
	For flush pushbuttons	Rubber (EPDM)	OC-31	OC-31	1	<ul style="list-style-type: none"> Used to cover and protect pushbuttons where units are subject to watersplash. Not suitable for outdoor use or where the units are subject to oil splash. Cannot be used with nameplates HWAM, HWAQ, HWAS, or HWAV. 
	For extended pushbuttons		OC-32	OC-32	1	
		Polyarylate (gasket: nitril rubber)	HW9Z-KL1	HW9Z-KL1	1	<ul style="list-style-type: none"> Used to protect pushbuttons, illuminated pushbuttons, selector switches, and key selector switches. 
		Clear Silicon Rubber	HW9Z-D7D	HW9Z-D7D	1	<ul style="list-style-type: none"> IP65 
		Nitril rubber	HW9Z-A25	HW9Z-A25PN05	5	<ul style="list-style-type: none"> Used to install the HW series units into ø25 mm mounting holes. IP65 Cannot be used with anti-rotation, nameplate, and rubber boot for dual pushbutton switches. Mounting panel thickness: 1.2 to 6.0 mm See page 46 for details.
		Gasket: polyamide Washer: metal (brass)	HW9Z-A30	HW9Z-A30PN02	2	<ul style="list-style-type: none"> Used to install the HW series units (round type) into ø30 mm mounting holes (except for HW1E, HW1B-M5/V5, and HW7D). IP65 Cannot be used with anti-rotation ring, nameplate, full-shroud illuminated pushbuttons, pushbutton selectors, and mono-lever switches. Mounting panel thickness: 1.6 to 4.0 mm
		Gasket: rubber Washer: metal	HW9Z-A30E	HW9Z-A30EPN02	2	<ul style="list-style-type: none"> Used to install jumbo dome pilot light HW1P-5Q units into ø30 mm mounting holes. IP65

Maintenance Parts


Shape	Material	Part No.	Ordering No.	Package Quantity	Remarks
 Contact Block HW-U Weight: 11g (approx.)	NO contact	HW-U10	HW-U10	1	<ul style="list-style-type: none"> Housing color: blue/Push rod color: green MAU has gold contacts
		HW-U10-MAU	HW-U10-MAU		
	NC contact	HW-U01	HW-U01	1	<ul style="list-style-type: none"> Housing color: reddish purple/Push rod color: red MAU has gold contacts
		HW-U01-MAU	HW-U01-MAU		
	EM (early make) contact	HW-U10R	HW-U10R	1	<ul style="list-style-type: none"> Housing color: blue/Push rod color: black MAU has gold contacts
		HW-U10R-MAU	HW-U10R-MAU		
	LB (late break) contact	HW-U01R	HW-U01R	1	<ul style="list-style-type: none"> Housing color: reddish purple/Push rod color: white MAU has gold contacts
		HW-U01R-MAU	HW-U01R-MAU		
 Dummy Block Weight: 3.5g (approx.)	Polyamide	HW-DB	HW-DBPN10	10	<ul style="list-style-type: none"> For HW-U contact blocks Used when the number of contact blocks and full voltage adapters is odd number.
 Full Voltage Adapter for Illuminated (*1) Weight: 12g (approx.)	Polyamide	HW-GA1N	HW-GA1NPN02	2	<ul style="list-style-type: none"> Applicable model: Illuminated pushbuttons, Illuminated selector switches Applicable load (LED lamp) LSTD-6 (6V AC/DC)/LSTD-1 (12V AC/DC) LSTD-2 (24V AC/DC)
 Transformer Unit (*1) Weight: 12g (approx.)	100/110V AC	HW-T16	HW-T16	1	<ul style="list-style-type: none"> Applicable model: Illuminated pushbuttons, Illuminated selector switches Applicable load (LED lamp) LSTD-6 (6V AC/DC)
	200/220V AC	HW-T26	HW-T26	1	

*1) Maintenance parts are used for maintenance parts only. Do not use these parts for expansion or remodeling purpose.

Shape	Material/Dimensions	Part No.	Ordering No.	Package Quantity	Color Code *	
	① Round flush	Polyarylate ø23.5 H4.2	HW9Z-L11*	HW9Z-L11*PN05	5	R (red), G (green), Y (yellow), A (amber), C (clear), S (blue) (*2)
	② Square flush	Polyarylate ø24.6 H4	HW9Z-L21*	HW9Z-L21*PN05	5	
	③ Round extended	Polyarylate ø23.3 H10	HW9Z-L12*	HW9Z-L12*PN05	5	
	④ ø29 mushroom	AS, marking type ø29 H12.7	ALW31L-*	ALW31L-*PN02	2	R (red), G (green), S (blue), C (clear) (*2)
			ALW31LD-*	ALW31LD-*PN02	2	Y (yellow), A (amber)
	⑤ ø40 mushroom	AS, marking type ø40 H12.7	ALW41L-*	ALW41L-*	1	R (red), G (green), S (blue), C (clear) (*2)
			ALW41LD-*	ALW41LD-*	1	Y (yellow), A (amber)
	⑥ Jumbo dome	Polycarbonate ø66 H50	HW1A-P5*	HW1A-P5*	1	R (red), G (green), Y (yellow), A (amber), W (white), S (blue)
⑦ Dome for pilot light	AS ø23.5 H15.1	HW1A-P2*	HW1A-P2*PN05	5	R (red), G (green), Y (yellow), A (amber), W (white), S (blue)	
	① Round flush with round or square bezel	Polyacetal ø23.6 H3	HW1A-B1*	HW1A-B1*PN05	5	Use ① for pushbutton selectors. B (black), G (green), R (red), Y (yellow), S (blue), W (white)
	② Round extended with round or square bezel	Polyacetal ø23.6 H9.2	HW1A-B2*	HW1A-B2*PN05	5	
	③ Square flush	Polyacetal □24.8 H3	HW2A-B1*	HW2A-B1*PN05	5	
	④ Square extended	Polyacetal □24.5 H9.2	HW2A-B2*	HW2A-B2*PN05	5	
	⑤ ø29 mushroom	Polyacetal ø29 H12.7(M18P1.0)	HW1A-B3*	HW1A-B3*PN02	2	
	⑥ ø40 mushroom	Polyacetal ø40 H12.7(M18P1.0)	HW1A-B4*	HW1A-B4*PN02	2	


*2) Use C (clear) lens for W (white) or PW (pure white) illumination.

Maintenance Parts

Shape		Material/Dimensions	Part No.	Ordering No.	Package Quantity	Remarks
Marking Plate	Round flush 	Acrylic ø21.5 Thickness = 1	HW9Z-P11	HW9Z-P11PN05	5	<ul style="list-style-type: none"> • White • See page 46 for dimensions and engraving area.
	Round extended 	Acrylic ø21.3 Thickness = 6.5	HW9Z-P12	HW9Z-P12PN05	5	
	Square flush 	Acrylic 22.7 Thickness = 1	HW9Z-P21	HW9Z-P21PN05	5	
	ø29/40 mm mushroom 	Acrylic ø15.7 H3.4	ALW3B	ALW3BPN05	5	
Operator Knob for Illuminated Selector Switch 	AS resin		HW9Z-FDY*	HW9Z-FDY*	1	<ul style="list-style-type: none"> • Specify a color code in place of *. R (red), G (green), Y (yellow), A (amber), W (white), S (blue) • Use W (white) knob/lever for pure white illumination.
Operator Lever for Illuminated Selector Switch 			HW9Z-FDL*	HW9Z-FDL*	1	
Spare Key (Disc Tumber Key) 		Metal (nickel-plated brass)	HW9Z-SK-231	HW9Z-SK-231PN02	2	
Spare Key (Pin Tumber Key) 		Metal (nickel-plated brass)	LW9Z-SK-500	LW9Z-SK-500PN02	2	• Standard key number
			LW9Z-SK-□	LW9Z-SK-□PN02		• Key number □ : 501 to 503
			LW9Z-SK-□	LW9Z-SK-□PN02		• Key number □ : 504 to 515
Lockig Ring 		Polyamide (black) ø28.4 H5 M22P1	HW9Z-LN	HW9Z-LNPN05	5	
Cap for Mono-lever Switch 	Standard	Nitryl rubber ø10 L20	HW9Z-CPM	HW9Z-CPM	1	
Boot for Mono-lever Switch 	Standard	Nitryl rubber ø29.2 L34.4	HW9Z-BLM	HW9Z-BLM	1	
Diffusing Lens 		Polycarbonate ø22.2 H21	HW9Z-PP5C	HW9Z-PP5C	1	<ul style="list-style-type: none"> • Used for LED type jumbo dome pilot lights only. Do not use for incandescent lamp illumination.
Safety Lever Lock 		Polyacetal (yellow)	HW9Z-LS	HW9Z-LSPN10	10	<ul style="list-style-type: none"> • A safety lever lock is supplied with a standard HW series switch/pilot light.
Gasket 		Nitryl rubber (black)	HW9Z-WM	HW9Z-WMPN10	10	 <p>Thickness = 0.5 ø21.6 ±0.15 ø28.0 ±0.15</p>
Contact Block Plug 		Polyamide	HW9Z-CBPL	HW9Z-CBPLPN10	10	<ul style="list-style-type: none"> • Used to plug the hole in the center of contact block.


Maintenance Parts

HW Series LED Lamps (except for HW Jumbo Dome Pilot Lights)

Shape/Dimensions	Operating Voltage	Current Draw		Part No.	Ordering No.	Illumination Color Code	Package Quantity	Base
		DC	AC					
	6V AC/DC	7mA (R, A, W) 5.5mA (G, S, PW)	8mA	LSTD-6*	LSTD-6*	R, G, A, W, S, PW	1	BA9S/13
					LSTD-6*PN10		10	
	12V AC/DC	10mA	11mA	LSTD-1*	LSTD-1*		1	
					LSTD-1*PN10		10	
	24V AC/DC	10mA	11mA	LSTD-2*	LSTD-2*		1	
					LSTD-2*PN10		10	

- Specify a color code in place of *. R (red), G (green), A (amber), W (white), S (blue), PW (pure white)
- Use a PW (pure white) LED lamp for Y (yellow) illumination.

HW Series LED Lamps (used for HW Jumbo Dome Pilot Lights)

Shape/Operating Voltage	Current Draw		Ordering No.	Illumination Color Code	Dimensions
	DC	AC			
	15mA	15mA	LSTDB-2*	R, G, A, W, S, PW	

- Specify a color code in place of *. R (red), G (green), A (amber), W (white), S (blue), PW (pure white)
- Use a PW (pure white) LED lamp for Y (yellow) illumination.

LED Lamps (LED Lamps for replacing incandescent lamps)

- Use the following replacement LED lamps to replace incandescent lamps.
- See HW series LED lamps shown above for ordering.
- LED lamps may have different brightness/color hue compared with incandescent lamps.

Incandescent Lamp				
Model (dimensions in mm)	Part No.	Rated Voltage	Lamp Ratings	Base
 <p>Glass bulb: ø11 Length: 23</p>	LS-6	6V AC/DC	1W(6V)	BA9S/13
	LS-8	12V AC/DC	1W(18V)	
	LS-2	AC/DC18V	1W(24V)	
	LS-3	24V AC/DC	1W(30V)	
LSB (For Jumbo Dome Pilot Lights)	LSB-2	24V AC/DC	28V/0.17A	BA9S/13



Replacement LED Lamp			
Ordering No.	Illumination Color Code	Rated Voltage	Base
LSTD-6*	R, G, A, W, S, PW	6V AC/DC	BA9S/13
LSTD-1*		12V AC/DC	
LSTD-2*		24V AC/DC	
LSTD-2*		24V AC/DC	
LSTDB-2*	R, G, A, W, S, PW	24V AC/DC	BA9S/13

- Specify a color code in place of *. R (red), G (green), A (amber), W (white), S (blue), PW (pure white)
- Use a PW (pure white) LED lamp for Y (yellow) illumination.

Transformer

Package Quantity: 1


Shape	Operating Voltage	Operating Voltage Range	Ordering No.	Applicable Load
	100/110V AC	100/110V AC ±10%	TWR516	LSTD-6* (6V AC/DC, LED lamp) Specify a color code in place of * in Part No. R (red), G (green), A (amber), W (white), S (blue), PW (pure white)
	200/220V AC	200/220V AC ±10%	TWR526	
	400/440V AC	400/440V AC ±10%	TWR546	
	100/110V AC	100/110V AC ±10%	TWR512	LSTD-2* (24V AC/DC, LED lamp) or LSTDB-2* (24V AC/DC, LED lamp) Specify a color code in place of * in Part No. R (red), G (green), A (amber), W (white), S (blue), PW (pure white)
	200/220V AC	200/220V AC ±10%	TWR522	
	400/440V AC	400/440V AC ±10%	TWR542	

- Terminal cover (TWR-VL3) is installed on transformers as standard.
- Transformer is installed to one HW series unit.

Specifications

Part No.	TWR5□6	TWR5□2
Operating Voltage	100/110V AC, 200/220V AC 400/440V AC (50/60Hz)	
Current Draw	2.4VA	
Rated Insulation Voltage	600V	
Insulation Resistance	100MΩ minimum (500V DC megger)	
Operating Temperature	-30 to +60°C (no freezing)	
Operating Humidity	35 to 85% RH (no condensation)	
Storage Temperature	-40 to +80°C (no freezing)	
Vibration Resistance	Damage limits: 30Hz, amplitude 1.5 mm Operating extremes: 5 to 55Hz, amplitude 0.5 mm	
Shock Resistance	Damage limits: 1,000 m/s ² Operating extremes: 100 m/s ²	
Dielectric Strength	2500V AC, 1 minute	
Terminal Screw	M3.5	
Applicable Wire	2mm ² maximum, 2 wires maximum	
Weight (approx.)	87g	

Dimensions

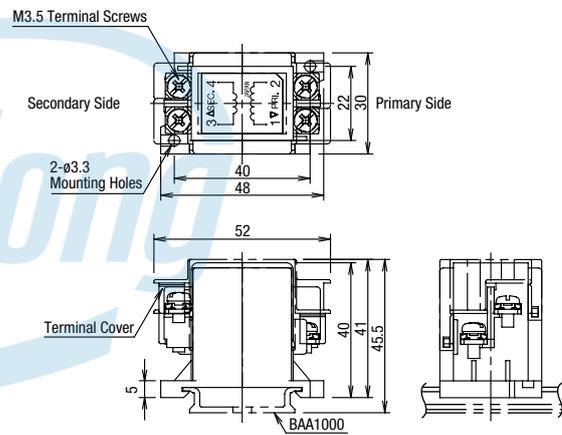

All dimensions in mm.

INDUSTRIAL AUTOMATION

Accessories

Shape	Material	Part No.	Ordering No.	Package Quantity	Dimensions (mm)
 Weight: 200g approx.	Aluminum Length: 1000 mm	BAA1000	BAA1000PN10	10	
 Weight: 320g approx.	Steel Length: 1000 mm	BAP1000	BAP1000PN10	10	
 Weight: 15g approx.	Metal (zinc-plated steel) Applicable rail: AA1000 BAP1000	BNL6	BNL6PN10	10	

⚠ Safety Precautions


- Turn off the power to the HW series switches & pilot lights before starting installation, removal, wiring, maintenance, and starting installation, removing, wiring, maintenance, and inspection of the products. Failure to turn power off may cause electrical shocks or fire hazard.
- To avoid a burn on your hand, use the lamp holder tool when replacing lamps.

- For wiring, use wires of a proper size to meet the voltage and current requirements. Tighten the terminal screws to the recommended tightening torque (see page 51). Failure to tighten terminal screws may cause overheat and fire.
- When using a commercially available lamp, choose a lamp with rated voltage 5 to 30V AC/DC and 1W maximum, and with the same base and shape. Make sure of correct operation before installation. The operation of illuminated pushbutton switches cannot be guaranteed when a commercially available lamp is used.

Operating Instructions

Panel Mounting


- Remove the contact block from the operator (for transformer type pilot lights, remove the transformer from the illumination unit). Remove the locking ring from the operator (for pilot lights, remove the locking ring from the illuminated unit). Insert the operator into the panel cut-out from the front. Tighten the locking ring from the back to install the contact block to the operator.

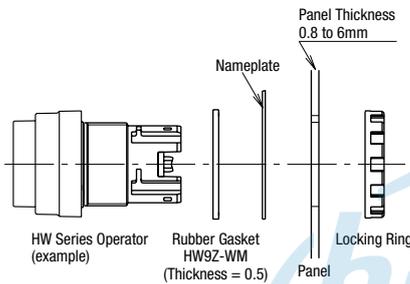


Mounting panel thickness is reduced by 1.5 mm when using a nameplate.

Removing the Contact Block

- Remove the safety lever lock (yellow) from the lock lever by inserting a flat screwdriver into the safety lever lock and push upwards.

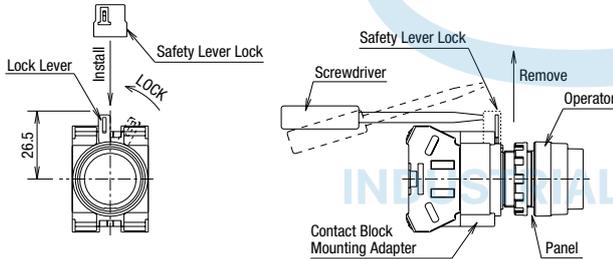

- Remove the operator from the contact block by turning the locking lever in the direction of the arrow shown below. Then the operator can be pulled out.

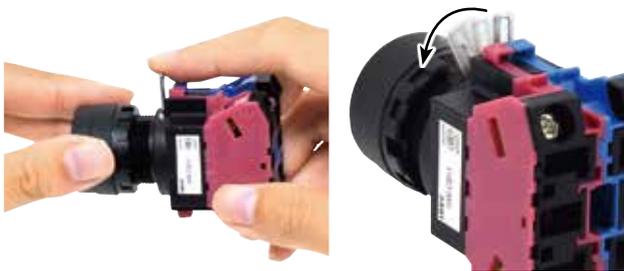

- To reinstall, place the TOP marking on the operator and the lock lever in the same direction, and insert the operator into the contact block mounting adapter. Then turn the locking lever in the opposite direction.
- Install the safety lever lock (yellow) on the lock lever. The safety lever lock cannot be installed when the lock lever is not upright.

Safety Lever Lock

IDEC strongly recommends using the safety lever lock (HW9Z-LS, yellow) to ensure that lock lever is locked, or to prevent maintenance personnel from unlocking contacts during wiring.



How to install

- Mount the HW series onto the panel, lock the lever, and push in the safety lever lock.

Spacing in Vertical Direction

- HW series can be installed with a minimum of 50 mm spacing in vertical direction (mono-lever switch: 70 mm minimum). Be sure to take the space required for installing/removing the safety lever lock into consideration. When the spacing is narrower than the recommended value, install the HW series units in the order of low to high. When removing, do so in the opposite direction.

Notes for Panel Mounting

Locking ring wrench recommended torque

Tighten the bezel to a tightening torque of 2.0 N·m.

Locking ring wrench

Locking ring wrench (MW9Z-T1) can be used to tighten the bezel. Do not use pliers. Excessive tightening will damage the locking ring.



Locking ring wrench (MW9Z-T1)

Panel Thickness

HW series can be mounted on a panel with thickness of 0.8 to 6.0 mm. Take the thickness of nameplate and/or switch guard into consideration.

Replacement of LED Lamps

LED lamps can be replaced by using the lamp holder tool (OR-55) from the front of the panel, or by removing the contact block from the operator unit. (See page 38 for lamp holder tool.)

How to Remove

To remove, slip the lamp holder tool onto the lamp head lightly. Then push slightly, and turn the lamp holder tool counterclockwise.




Photo: Extended pilot light


Operating Instructions

How to Install

Insert the lamp head into the lamp holder tool.



Place the pins on the lamp base to the grooves in the lamp socket. Insert the lamp and turn it clockwise.

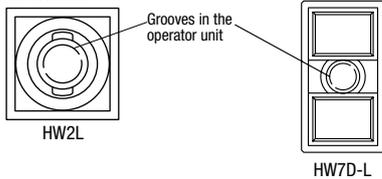

Installing/Removing the Buttons and Lenses

<To install>

<To remove>

Pushbutton Button

• Flush/Extended

Push in the button to install.



Insert a flat screwdriver between the button and the bezel to remove the button.



• Mushroom/Jumbo Mushroom

Button has threads. Turn counterclockwise to install the button.



Turn the button counterclockwise to remove. Note: Jumbo mushroom button cannot be removed.



Illuminated Pushbutton Lens

• Flush/Extended

Push in the lens holder into the operator unit.



Insert a flat screwdriver between the button and the bezel to remove the lens holder.



• Mushroom/Jumbo Mushroom

Lens has threads. Turn clockwise to install the lens.



Lens has threads. Turn counterclockwise to remove the lens.



Pilot Light Lens

• Extended/Mushroom

Lens has threads. Turn clockwise to install the lens.



Turn the lens counterclockwise to remove.



• Round Flush/Square Flush

Push in the lens holder into the operator unit.




Insert a flat screwdriver between the lens and the bezel to remove.



Removing the Contact Blocks/Full Voltage Adapters


Insert a flat screwdriver (4 to 6 mm) into the snap-fit latches of the contact block or full voltage adapter and lift to remove.



- Make sure to lift both latches. Contact blocks cannot be removed by lifting one latch only.
- Do not apply excessive force to the latches, otherwise damage may be caused.

Transformer Units and DC-DC Converters

Insert the end of the contact block removal tool (TW-KC1) into the snap-fit latch of the transformer units or DC-DC converter and pull the tool forward. The contact block removable tool cannot be used to remove the HW-U contact blocks (HW-U), full voltage adapters (HW-GA1N), or dummy blocks (HW-DB).

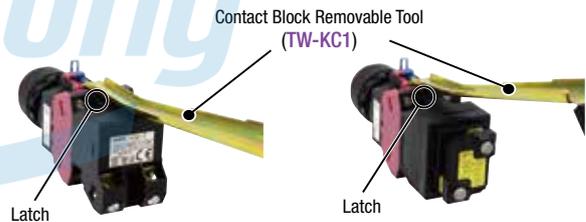

Transformer Units and DC-DC Converters for Pilot Lights

Insert a flat screwdriver into the snap-fit latch on the contact block and lift to remove.



⚠ When replacing parts (contact block, dummy block, full voltage adapter, transformer) for maintenance, make sure to install the parts to the original position. Otherwise proper operation cannot be guaranteed.

Operating Instructions

Using a Ring Adapter


HW9Z-A25

Install the ring adapter between the HW series unit and panel. Make sure that the side with ridges face the panel.




Nitril Rubber


Dimensions



Installation

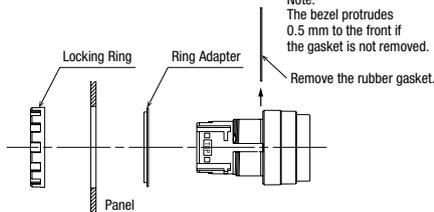

Panel Cut-out



HW9Z-A30

The ring adapter HW9Z-A30 consists of a washer and adapter. Install adapter between the HW series unit and panel. Install washer between the locking ring and panel.




Washer: metal (brass)



Adapter: polyamide


Dimensions




Washer

Adapter

Installation

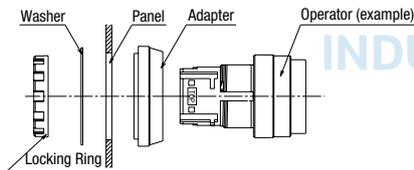

Panel Cut-out



Replacement of Lens and Marking Plate

Removing the Lens Unit

Remove the lens unit (color lens, marking plate, and lens holder) by inserting a small flat screwdriver into the recess of the lens through the bezel. Knob on illuminated selector switches can be removed by tilting sideways. No tool is required.



Removing the Lens

Remove the lens by pushing the lens from the rear to disengage the latches between the lens and the lens holder, using a flat screwdriver as shown below. Marking plate can be removed after the lens is removed from the lens holder.




Note: The translucent filter in the lens holder cannot be removed because this filter is sealed to make the unit waterproof and airtight.

Installing

[For Round Lens]

Lens Marking Plate Lens Holder


1. Place the marking plate on the lens holder with the anti-rotation projection engaged and press the lens onto the lens holder to engage the latches.
2. Place the marking plate in the correct orientation.



[For Square Lens]

Lens Marking Plate Lens Holder

1. Place the marking plate on the lens holder and press the lens onto the lens holder to engage the latches.
2. Place the marking plate in the correct orientation (note the directionality of marking plate).




Marking

For HW series illuminated pushbuttons and pilot lights, legends and symbols can be engraved on the built-in marking plates, or printed film can be inserted under the lens for labeling purposes. Films are not supplied with illuminated pushbuttons, and may be provided by the user.

Lens Style	Round Lens (Round Flush/Round Flush with Square Bezel)	Square Lens (Square Flush)
Built-in Marking Plate	<p>Engraving Area ø19.6 Outside diameter ø21.5</p>	<p>Engraving Area 19.9 Outside diameter 22.7</p>
Applicable Marking Film	<p>ø21.5 19.4</p>	<p>22.7</p>
	<ul style="list-style-type: none"> • Engraving must be made on the engraving area within 0.5 mm deep. • The marking plate is made of white acrylic resin. • Two 0.1 mm-thick films or one 0.2 mm-thick film can be installed in the lens (marking film is not supplied and must be provided by the user). • Recommended marking film: polyester 	

Insertion Order of Marking Plate and Film


[Round Lens]



Note: Films are not supplied.

Operating Instructions

[Square Lens]




Note: Films are not supplied. When inserting a film, make sure that the marking plate is installed with its uneven side facing the lens holder.

Nameplate

Mounting panel thickness is reduced by 1.5 mm when using a nameplate.


Installing a Marking Plate

Insert a marking plate in the direction of the arrow ①, and press in as shown ②.



Removing a Marking Plate

Insert a flat screwdriver into the upper middle part of the marking plate and remove. When anti-rotation is not required, remove the projection from the nameplate using pliers.



Replacing the Lens of Dual Pushbuttons

Removing

Remove the lens by inserting a small flat screwdriver into the recess of the lens through the bezel.



Installing

Install the lens in the recess between the buttons by pressing against the bezel.

Selector Switches


Turn the operator such as knob, lever, and key to each position accurately. Releasing halfway may cause the operator to return to the former position, or to get stuck between. On spring return two-way types, the center of operators may be misaligned slightly.

Key Selector Switches

Insert the key completely before turning. Failure to do so may cause failures.


Anti-rotation Ring and Panel Cut-out

Align the TOP marking on the operator, TOP marking on the anti-rotation ring with the recess in the mounting panel.

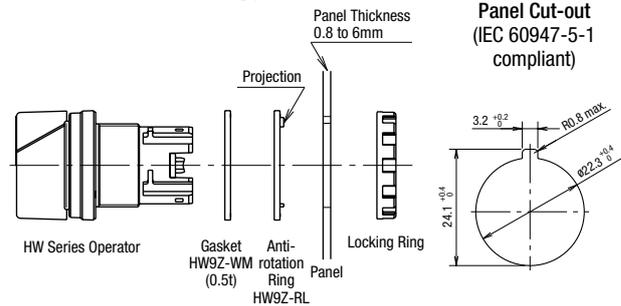

Dual Pushbutton Switches

The pushbuttons cannot be removed or replaced. Do not attempt to remove using a flat screwdriver or pliers, otherwise the pushbuttons may be damaged.



Installing the Rubber Boot for Dual Pushbuttons


When using the HW7D pushbuttons in places where the pushbuttons are subject to water splash or an excessive amount of dust, make sure to use the HW9Z-D7D rubber boot (IP65) which is ordered separately.

Remove the rubber gasket pre-installed on the operator, and install the rubber boot from the front of buttons.


Notes for Installing the Rubber Boot

Remove the gasket from the operator, and install the rubber boot on the operator. Pull out the seals of the rubber boot and place them around the operator sleeve as shown. Make sure that the seals are not twisted or tucked inside and that the gasket does not remain, otherwise the normal waterproof and dustproof characteristics are not ensured.

- ① Remove the gasket.
- ② Install the rubber boot on the pushbuttons

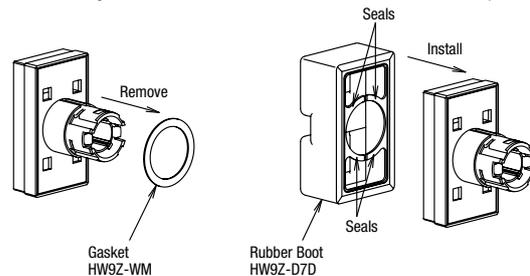


Rubber Boot Installed



Operating Instructions

Close Mounting


When mounting the units closely in a horizontal row on 30 mm centers, use optional barriers to prevent interconnection between adjoining terminals, and to increase the creepage distance. The barriers can be attached simply by pressing them onto the sides of contact blocks.

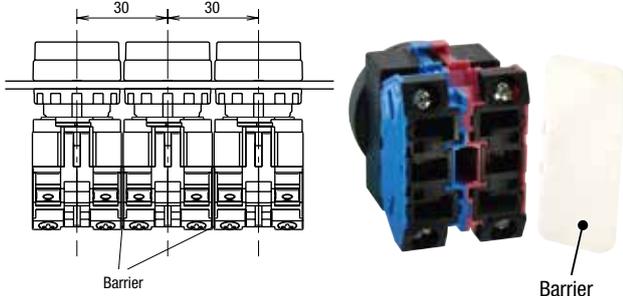


Use a barrier (HW-VU1) between the contact blocks.

Note: Sufficient insulation distance cannot be obtained if barriers are not installed, or when other barriers such as HW-VG1 is used.

When using transformer type illuminated HW series of 240V AC maximum closely in a horizontal row on 30 mm centers, insert straight the solid wires or stranded wires into inside of the terminal screw on the transformer (see figure below) to prevent short circuit between adjoining terminals.



Enlarged View of Terminal Part



When using transformer type pilot lights closely mounted in horizontal and vertical rows on 30 mm centers, keep the ambient temperature below 40°C.

Applicable Wiring


(1) Contact Block 0.3 to 3.5 mm² (solid wire ø0.5 to 2.0 mm)

Pushbutton/illuminated pushbutton/dual pushbuttons (without pilot light), selector switch, illuminated selector switch, pushbutton selector, mono-lever switch

Ⓐ and Ⓑ show the wiring direction to the terminals.

<Contact Block>


Terminal screws M3.5 (spring-up)




Applicable Crimping Terminal

Be sure to use an insulation tube or cover on the crimping part of the crimping terminal to prevent electrical shocks.


Crimping terminal for Ⓐ

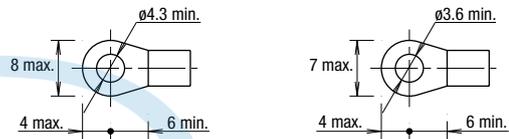


IP20 crimping terminal



Crimping terminal for Ⓑ (IP20)



Solid wire



- Strip the wire insulation 8 to 9 mm from the end.
- Insert the wire until the insulation comes into contact with the terminal metal part.

(1)-1 IP20 Degree of Protection

The terminal of HW-U contact block has IP20 degree of protection. When IP20 is required for wiring, observe the followings.

Make sure to insert the crimping terminal or wire to the terminal straight and fully.

When using a crimping terminal

Use IP20 crimping terminals.

When using a solid wire

Strip the wire insulation 8 to 9 mm from the end and insert the wire to the terminal fully.

When using a stranded wire

Strip the wire insulation 8 to 9 mm from the end and insert the wire to the terminal fully. Make sure that the wires are not loosened.

Operating Instructions


(2) Power Unit 0.3 to 2 mm² (solid wire ø0.5 to 1.6 mm)

Illuminated pushbutton/illuminated selector switch

Ⓐ and Ⓑ show the wiring direction to the terminals.


<Full Voltage Adapter>

Terminal screws M3.5 (spring-up)




<Transformer Unit>

100/110V AC, 200/220V AC
Terminal screws M3.5 (spring-up)



<DC-DC Converter Unit/Transformer Unit>

110V DC, 380V AC minimum
Terminal screws M3.5 (spring-up)





Applicable Crimping Terminal


Be sure to use an insulation tube or cover on the crimping part of the crimping terminal to prevent electrical shocks.

Crimping terminal for Ⓐ

Crimping terminal for Ⓑ



Solid wire



- Strip the wire insulation 7 to 8 mm from the end.
- Insert the wire until the insulation comes into contact with the terminal metal part.

Terminal cover is integrated in the full voltage adapter and transformer unit. Note that the connection terminal is not IP20.

(2) Pilot Light 0.3 to 2 mm² (solid wire ø0.5 to 1.6 mm)

(Arrows show the wiring direction)


<Full Voltage Adapter>

6, 12, 24V AC/DC
Terminal screws M3.5 (spring-up)




<Transformer, DC-DC Converter>

100/110V AC, 200/220V AC
110V DC, 380V AC minimum
Terminal screws M3.5 (spring-up)




Applicable Crimping Terminal

Be sure to use an insulation tube or cover on the crimping part of the crimping terminal to prevent electrical shocks.



Solid Wire

- Strip the wire insulation 8 to 9 mm from the end.
- Insert the wire until the insulation comes into contact with the terminal metal part.
- Terminal cover is integrated but not IP20.
- When selecting mounting centers and crimping terminals, take sufficient insulation distance into consideration.



Cautions for Wiring

About DC-DC Converter Unit

1. Note the polarity for wiring when connecting to the DC-DC converter.

Terminal No.	Polarity
X1	Positive
X2	Negative

- Incandescent lamps cannot be used in DC-DC converter unit.
- DC-DC converters are equipped with an electric circuit and noise may be heard inside the unit, which does not affect the performance of DC-DC converters.

Recommended Tightening Torque Number of Wires

Unit	Wire	Number of Wires	Recommended Tightening Torque	Terminal Screw	
HW-U Contact Block	Crimping Terminal		2	1.0 to 1.3	M3.5
	Solid Wire	ø0.5 to 1.6 mm (AWG14 to 22)	2	1.0 to 1.3	
		ø1.7 to 2.0 mm (AWG12)	1	1.2 to 1.3	
	Stranded Wire	0.3 to 2.0 mm ² (AWG14 to 22)	2	1.0 to 1.3	
2.1 to 3.5 mm ² (AWG12)		1	1.2 to 1.3		
Illuminated Unit (*1)	Crimping Terminal		2	1.0 to 1.3	M3.5
	Solid Wire	ø0.5 to 1.6 mm (AWG14 to 22)			
	Stranded Wire	0.3 to 2.0 mm ² (AWG14 to 22)			
Pilot Light	Crimping Terminal		2	1.0 to 1.3 (M3.5)	M3.5
	Solid Wire	ø0.5 to 1.6 mm (AWG14 to 22)			
	Stranded Wire	0.3 to 2.0 mm ² (AWG14 to 22)			

*1) Lamp terminal of illuminated pushbuttons, illuminated selector switches, dual pushbuttons with pilot lights

ø22 Switches & Pilot Lights

See our website for other ø22 switches & pilot lights.

■ ø22 HW Series Pilot Lights (short body)



- 100V, 200V AC/DC: 30.5 mm depth behind panel
- 6, 12, 24V AC/DC: 21.5 mm depth behind panel
- Integrated terminal cover to ensure safety
- IP65 degree of protection to prevent water from entering inside the panel (IEC 60529)
- Marking is possible with square flush model using a marking plate or film

■ ø22 CW Series Flush Silhouette Switches



- Flush bezel projects only 2.5 mm from front of panel
- IP20 finger-safe screw terminals
- ø22.3 mm mounting hole compliant with IEC 60947-5-1
- Black plastic and metallic bezels available

■ ø22 AP22 Series Ultra-bright LED Pilot Lights



- Outstanding visibility for alerting purposes
- Integrated terminal cover for IP20 safety
- Colored and clear lenses are offered
- IP66, Type 4X (UL) degree of protection (panel front)

■ ø22 LBW Series Flush Silhouette Switches



- Flush bezel projects only 2 mm from front of panel.
- Pushbuttons, selector switches, and key selector switches with up to 3PDT contacts
- ø22.3 mm panel cut-out
- Black or metallic flush bezels available

■ ø22 HW1Z Illuminated Buzzer



- Alerts workers of danger with sound and light
- IP65 degree of protection (IEC 60529)
- Easy wiring with push-in terminal
- Short, 19.7 mm depth behind panel

■ XW ø22 Emergency Stop Switches (Push-to-lock, Pull or Turn-to-reset operator)



- 1 to 4NC main contacts and 1NO or 2NO monitor contact
- IDEC's unique Safe Break Action and Reverse Energy Structure
- Direct opening action mechanism and safety lock mechanism
- Screw terminal type is finger-safe (IP20)
- Mechanical indicator model available

■ HW ø22 Emergency Stop Switches (Push-to-lock, Turn-to-reset operator)



- Operator button shape provides higher safety
- Direct opening action mechanism and safety lock mechanism
- Removable contact block model: finger-safe, spring-up terminal reduces wiring time

INDUSTRIAL AUTOMATION