

Audible Alarm

BM

Wall-mounted
(D type)Φ30
mmCE
(24V DC)RoHS
10

IP30

IP34
(D type only)Indoor/
Outdoor
UseUpright/
Sideways/
Inverted*
MountingAmbient
Temperature
-10°C~+60°C

75-90dB

* Indoor Only

2
Alarm
Sounds2
Inputs

Model Number Configuration

BM-220D



①

②

① Rated Voltage
202 = 24V AC/DC
210 = 100V AC
220 = 220V AC

② Specification
Blank = Standard Type
H = High Volume Type
D = Drip-proof Type

Dimensions (mm)

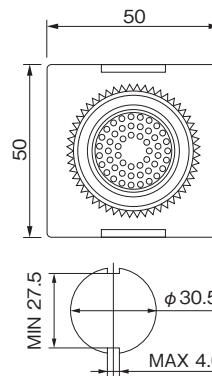

Mounting panel thickness = 7mm or less
If rotation-stop is not required, drill a
Φ30.5mm hole.

Product List

Model Number	Rated Voltage	Specifications	Power Consumption	Mass
BM-202	24V AC/DC	Standard	0.4W	0.12kg
BM-210	100V AC	Standard	2.5W	0.12kg
BM-220	220V AC	Standard	3.5W	0.12kg
BM-202H	24V AC/DC	High Volume Type	0.4W	0.13kg
BM-210H	100V AC	High Volume Type	2.5W	0.13kg
BM-220H	220V AC	High Volume Type	3.5W	0.14kg
BM-202D	24V AC/DC	Drip-proof Type	0.4W	0.14kg
BM-210D	100V AC	Drip-proof Type	2.5W	0.15kg
BM-220D	220V AC	Drip-proof Type	3.5W	0.15kg

Sound Specification

Alarm Sound	Rapid Hi-Lo (CH1), Stutter (CH2)
Volume Control	Not adjustable