

MP3 Voice Annunciator for Panel Mounting

BDV



80 mm	CE (DC Type)	RoHS 10	IP54	Indoor/Outdoor Use
Upright/Sideways/Inverted Mounting	Ambient Temperature -10°C~+50°C	87dB	Playback Length 63.5 seconds	bit / binary 4 / 15 Inputs

* Indoors for sideways and inverted directions.



-K (Dark gray)



-J (Light gray)

Model Number Configuration

BDV-15JF-J

①

②




- | | |
|---|---|
| ① Rated Voltage
J = 12 - 24V DC
K = 100 / 220V AC | ② Body Color - Front
J = Light Gray
K = Dark Gray |
|---|---|

Optional Parts

For details refer to P. 93 to P. 98


Product Description	Model Number
SD card (2GB)	SDV-2GP

Dimensions (mm)

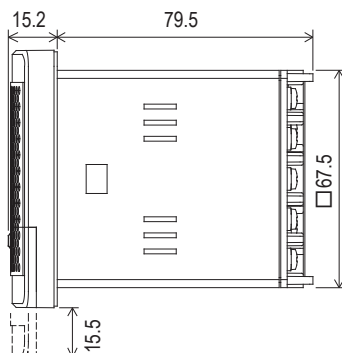

Metal Fitting

Mounting Dimensions



*Mounting hole dimension complies with IEC 61554 (DIN 43700).

Product List

Model Number	Rated Voltage	Body Color - Front	Power Consumption	Mass
BDV-15JF-J/K	12 - 24V DC	Light Gray, Dark Gray	4W	0.22kg
BDV-15KF-J/K	100 / 220V AC	Light Gray, Dark Gray	5W	0.34kg

Other Specifications

Supported Transistors	NPN
Sound File Format	MP3 data (Bit rate: 64 kbps/Sample rate: 44.1kHz)

BDV

LAN / USB / PoE / Wireless

Signal Tower

Beacons

Cube Tower

Audible Alarms and MP3 Voice Annunciators

Hybrid Signaling Devices

LED Illumination

Optional Parts