

CJ1W-NC□71

Decrease TCO with Simple Operation, Reduced Wiring, Batch Settings, and Batch Management

- Control Servos for up to 16 axes in a motion network with one Position Control Unit that supports MECHATROLINK-II *.
- * MECHATROLINK-II is a registered trademark of the MECHATROLINK Members Association.




CJ1W-NCF71

Features

- **Even Smaller**
Positioning of up to 16 axes can be controlled with a body the size of one CJ-series Unit. The compact body provides a perfect fit to meet the need for downsizing of equipment for multi-axis control.
- **Single-cable Connection with Flexible Wiring Placement**
With MECHATROLINK-II, connecting to the Servo Drive is easy. Just use a single cable (2-core shielded twisted-pair cable). Reduced wiring, with a total cable length of 50 m (or 30 m for 16 axes), allows more freedom in constructing systems.
- **Less Time Spent on Startup and Maintenance**
Servo parameters can be set from the PLC. This means that settings and adjustments can be performed from one location rather than having to connect to each Servo Drive separately.
- **Simple Expansion**
An easily expandable system can be constructed that is just as efficient now with a few axes or later with up to 16 axes.
- **Linked Operation of Multiple Axes with MA Functionality**
The addition of an Interpolation Compensation Axis Stop Mode Setting and Interaxial Allowance Deviation Setting to linear interpolation compensation enables easier setting of linked operation between axes.

System Configuration

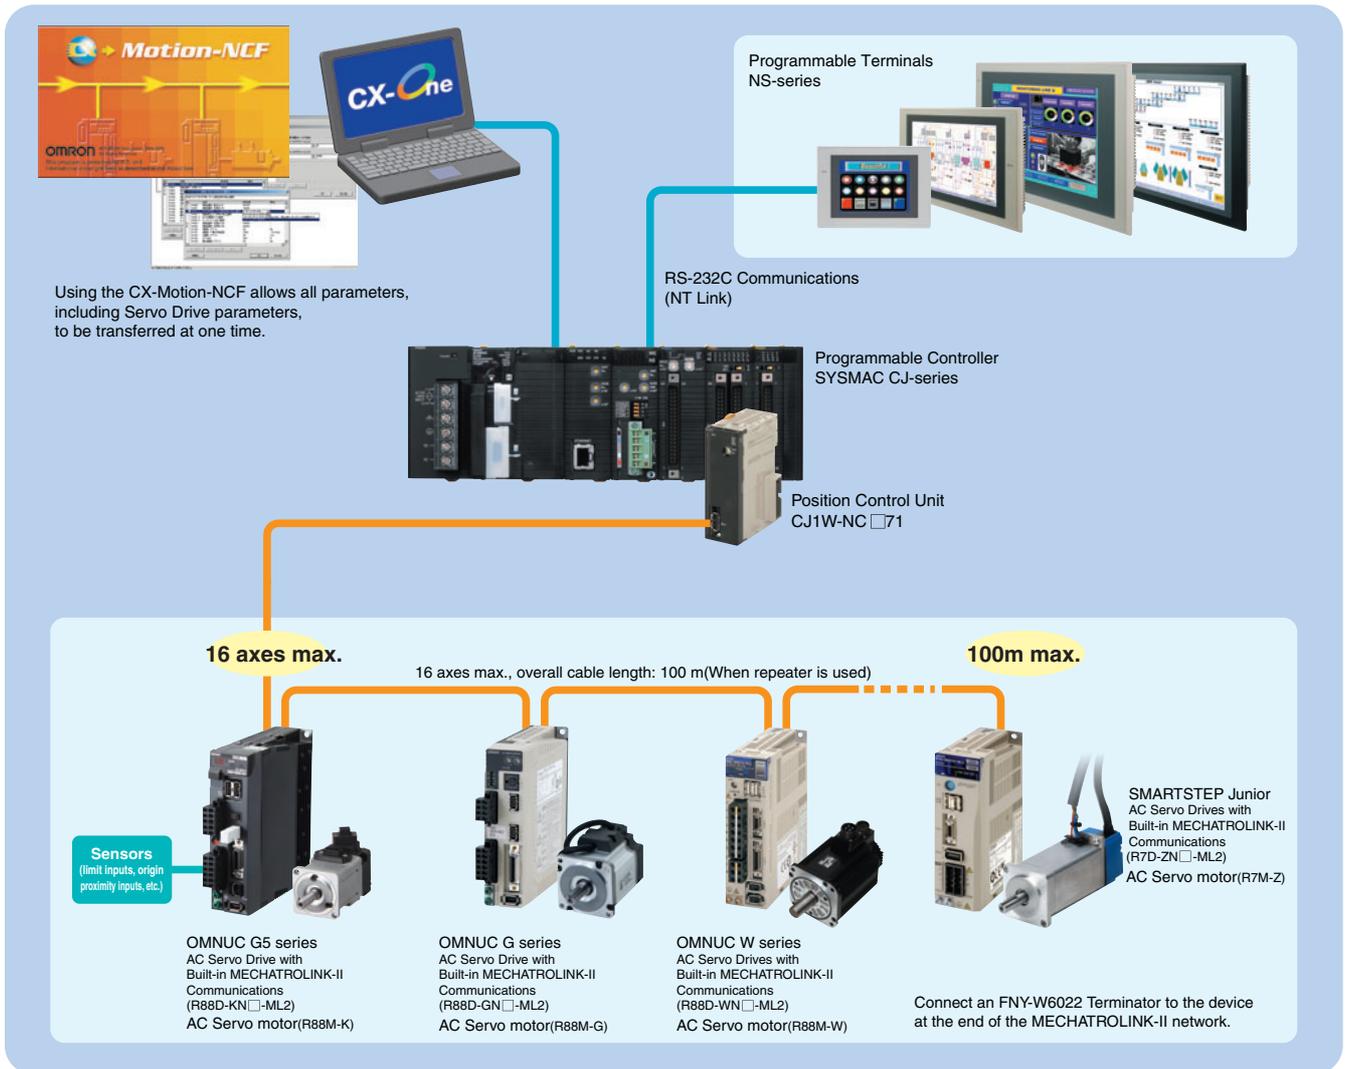

Ordering Information

International Standards

- The standards are abbreviated as follows: U: UL, U1: UL(Class I Division 2 Products for Hazardous Locations), C: CSA, UC: cULus, UC1: cULus (Class I Division 2 Products for Hazardous Locations), CU: cUL, N: NK, L: Lloyd, and CE: EC Directives.
- Contact your OMRON representative for further details and applicable conditions for these standards.

CJ-series Units

Unit type	Product name	Specifications		No. of unit numbers allocated	Current consumption (A)		Model	Standards
		Control output interface	No. of axes		5 V	24 V		
CJ1 CPU Bus Units	Position Control Unit with MECHATROLINK-II interface 	Control commands executed by MECHATROLINK-II synchronous communications. Direct operation by ladder programming. Control mode: Position control, speed control, or torque control	2	1	0.36	-	CJ1W-NC271	UC1, CE
			4				CJ1W-NC471	
			16				CJ1W-NCF71	
			16				CJ1W-NCF71-MA	

Support Software

Product name	Specifications	License	Media	Model	Standards
FA Integrated Tool Package CX-One Ver. 4.□	The CX-One is a package that integrates the Support Software for OMRON PLCs and components. CX-One runs on the following OS. Windows 2000 (Service Pack 4 or higher), XP, Vista, or 7 Note: Except for 64-bit version. CX-One Ver. 4.□ includes CX-Motion-NCF Ver. 1.□. For details, refer to the CX-One catalog (Cat. No. R134).	1 license *	CD	CXONE-AL01C-V4	-
			DVD	CXONE-AL01D-V4	

* Site licenses are available for the CX-One (3, 10, 30, or 50 licenses).

MECHATROLINK-related Devices and Cables (Manufactured by Yaskawa Corporation)

Name		OMRON model number	Yaskawa model number
MECHATROLINK-II Interface Unit	For W-series Servo Driver	FNY-NS115	JUSP-NS115
MECHATROLINK-II Cables (with ring core and USB connector on both ends)	0.5 m	FNY-W6003-A5	JEPMC-W6003-A5
	1.0 m	FNY-W6003-01	JEPMC-W6003-01
	3.0 m	FNY-W6003-03	JEPMC-W6003-03
	5.0 m	FNY-W6003-05	JEPMC-W6003-05
	10.0 m	FNY-W6003-10	JEPMC-W6003-10
	20.0 m	FNY-W6003-20	JEPMC-W6003-20
	30.0 m	FNY-W6003-30	JEPMC-W6003-30
MECHATROLINK-II Terminating Resistor	Terminating resistance	FNY-W6022	JEPMC-W6022
MECHATROLINK-II Repeater	Communications Repeater	FNY-REP2000	JEPMC-REP2000

Note: MECHATROLINK-related Devices and Cables are manufactured by Yaskawa Corporation, but they can be ordered directly from OMRON using the OMRON model numbers. (Yaskawa-brand products will be delivered even when they are ordered from OMRON.)

Accessories

None

Mountable Racks

Model	CJ system (CJ1, CJ2)		CP1H system	NSJ system	
	CPU Rack	Expansion Backplane	CP1H PLC	NSJ Controller	Expansion Backplane
CJ1W-NC□71 (-MA)	16 Units max. (10 per Rack)		2 Units *	Not supported	10 Units

* A CP1W-EXT01 CJ Unit Adaptor is required.

Specifications

General Specifications

Item	Specifications
Model	CJ1W-NC271/471/F71 (-MA)
Internal current consumption	360 mA max. at 5 V DC
Dimensions	31 × 90 × 65 mm (W × H × D)
Weight	95 g max.
Ambient operating temperature	0 to 55°C
Approved standards	CE, cULus, and C-tick

Specifications not listed above conform to general CJ Series specifications.

Functions and Specifications

Item	Specifications	
Unit classification	CPU Bus Unit	
Applicable PLCs	CJ Series	
Possible unit number settings	0 to F	
I/O allocations	Common Operating Memory Area	Words allocated in CPU Bus Unit Area: 25 words (15 output words, 10 input words)
	Axis Operating Memory Area	Allocated in one of the following areas (user-specified): CIO, Work, Auxiliary, Holding, DM, or EM Area. Number of words allocated: 50 words (25 output words, 25 input words) × Highest axis No. used
Compatible devices	<ul style="list-style-type: none"> • OMRON G5-series Servo Drives (Built-in MECHATROLINK-II communications) • OMRON G-series Servo Drives (Built-in MECHATROLINK-II communications) • OMRON W-series Servo Drives (equipped with MECHATROLINK-II Interface Unit or built-in MECHATROLINK-II communications) • OMRON SMARTSTEP Junior Servo Drives (Built-in MECHATROLINK-II communications) * 	
Control method	Control commands executed using MECHATROLINK-II synchronous communications.	
Maximum number of controlled axes	CJ1W-NC271: 2 axes, CJ1W-NC471: 4 axes, CJ1W-NCF71: 16 axes	
Control units	Position command unit	Command unit: Depends on the Electronic Gear Setting in the Servo Parameters. Default setting: Pulses
	Speed command unit for position control	Command units/s
	Acceleration/deceleration speeds for position control	10,000 command units/s ²
	Speed command unit for speed control	0.001% of the motor's momentary maximum rotation speed
	Torque command unit for torque control	0.001% of the motor's momentary maximum torque
Control command range	Position command range	-2,147,483,648 to 2,147,483,647 (command units)
	Speed command range for position control	0 to 2,147,483,647 (command units/s)
	Acceleration/deceleration speeds for position control	1 to 65,535 (10,000 command units/s ²)
	Speed command range for speed control	-199.999% to 199.999% The upper limit of the speed command range depends on the specifications of the Servo Drive.
	Torque command range for torque control	-199.999% to 199.999% The upper limit of the torque command range depends on the specifications of the Servo Drive.
Control functions	Servo lock/unlock	Creates (Servo lock) or releases (Servo unlock) the position loop on the PCU.
	Position control	Positions to an absolute position or relative position according to the target position and target speed specified from the ladder program.
	Origin determination	<ul style="list-style-type: none"> • Origin search: Establishes the origin using the specified search method. • Present position preset: Changes the present position to a specified position to establish the origin. • Origin return: Returns the axis from any position to the established origin. • Absolute encoder origin: Establishes the origin using a Servomotor that has an absolute encoder, without having to use an origin search.
	Jogging	Outputs pulses at a fixed speed in the forward rotation or reverse rotation direction.
	Interrupt feeding	Performs positioning by moving the axis a fixed amount when an external interrupt input is received while the axis is moving.
	Speed control	Performs speed control by sending a command to the Servo Drive speed loop.
	Torque control	Performs torque control by sending a command to the Servo Drive current loop.
	Stop functions	<ul style="list-style-type: none"> • Deceleration stop: Decelerates the moving axis to a stop. • Emergency stop: Positions the moving axis for the number of pulses remaining in the deviation counter and then stops the axis.

Item		Specifications
Auxiliary functions	Acceleration/deceleration curves	Sets one of the following: a trapezoidal (linear) curve, an exponential curve, or an S-curve (moving average).
	Torque limit	Restricts the output torque during axis operation.
	Override	Multiplies the axis command speed by a specified ratio. Override: 0.01% to 327.67%
	Servo parameter transfer	Reads and writes the Servo Drive parameters from the ladder program in the CPU Unit.
	Monitoring function	Monitors the control status of the Servo Drive, such as the command coordinate positions, feedback position, current speed, and torque.
	Software limits	Limits software operation within the positioning range during position control.
	Backlash compensation	Compensates for the amount of play in the mechanical system according to a set value.
	Deviation counter reset	The position deviation in the Servo Drive's deviation counter can be reset to 0 (unit version 1.3 or later).
External I/O	Position Control Unit	One MECHATROLINK-II interface port
	Servo Drive I/O	Forward/reverse rotation limit inputs, origin proximity inputs, external interrupt inputs 1 to 3 (can be used as external origin inputs)
Self-diagnostic functions		Watchdog, flash memory check, memory corruption check
Error detection functions		Overtravel, Servo Drive alarm detection, CPU error, MECHATROLINK communications error, Unit setting error

* SMARTSTEP Junior Servo Drive are supported by Position Control Units with unit version 2.0 or later.


MECHATROLINK Specifications

Item	Specifications
Communications protocol	MECHATROLINK-II
Baud rate	10 Mbps
Maximum transmission distance	50 m *1
Minimum distance between stations	0.5 m
Transmission media	Shielded, twisted-pair cables
Maximum No. of stations	30 slave stations max. *2
Topology	Bus
Transfer cycle	250 μs to 8 ms
Communications method	Master-slave, totally synchronous
Encoding	Manchester encoding
Data length	17 bytes/32 bytes selectable *3

- *1. This distance is the total length of the cable connected between devices. However, the maximum length depends on the number of devices connected and whether Repeaters are used.
- *2. Up to 16 devices can be connected to the CJ1W-NCF71 (-MA), up to 2 devices can be connected to the CJ1W-NC271, and up to 4 devices can be connected to the CJ1W-NC471.
- *3. The PCU data length is fixed at 32 bytes.

External Interface

CJ1W-NC□71 (-MA)

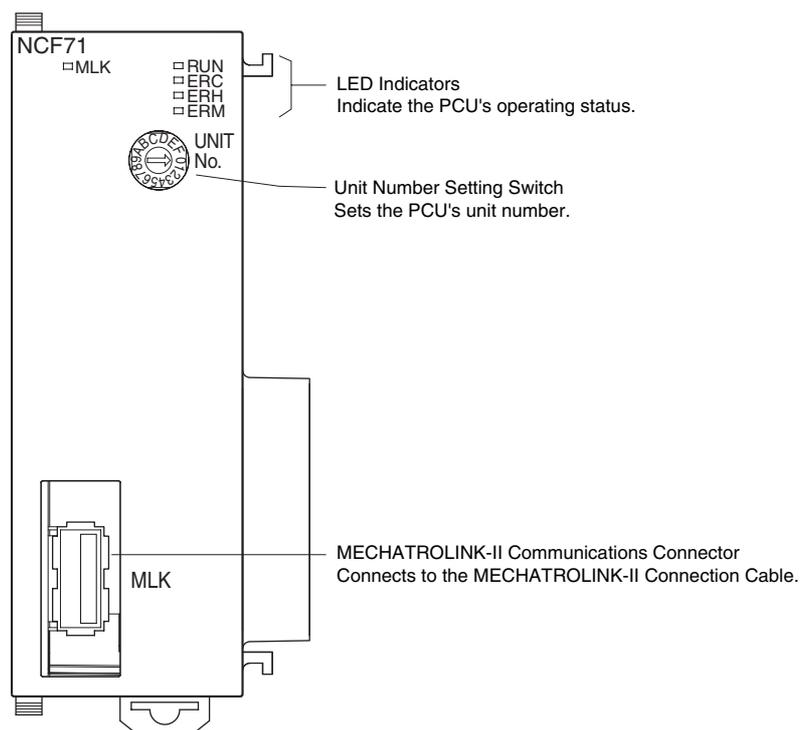

LED Indicators

LED	Name	Color	Status	Details
RUN	Run	Green	Lit	The PCU is operating normally.
			Not lit	Other condition
ERC	Unit Error	Red	Lit	A fatal error has occurred in the PCU and operation cannot continue.
			Flashing	A non-fatal error has occurred in the PCU and operation can continue.
			Not lit	Other condition
ERH	CPU Unit Error	Red	Lit	An error has occurred in the PLC.
			Not lit	Other condition
ERM	MECHATROLINK Device Error	Red	Lit	An error has occurred in MECHATROLINK communications.
			Flashing	An error has occurred in a connected MECHATROLINK device.
			Not lit	Other condition
MLK	MECHATROLINK Communications Status	Yellow	Lit	MECHATROLINK communications in progress
			Not lit	MECHATROLINK communications stopped


Functions Supported According to Position Control Unit Versions

Model	CJ1W-NC□71 (-MA)					
	Unit Ver. 1.0	Unit Ver. 1.1	Unit Ver. 1.2	Unit Ver. 1.3	Unit Ver. 2.0	Unit Ver. 2.1
Linear interpolation	–	Supported.	Supported.	Supported.	Supported.	Supported.
Absolute encoder setup function	–	–	Supported.	Supported.	Supported.	Supported.
Deviation counter reset	–	–	–	Supported.	Supported.	Supported.
Establishing connections even when there are unconnected axes or axes with alarms that cannot be cleared	–	–	–	Supported.	Supported.	Supported.
Transferring servo parameters even when there is an axis error	–	–	–	Supported.	Supported.	Supported.
Creating servo locks during software limit detection when an absolute encoder is used	–	–	–	Supported.	Supported.	Supported.
Driver main circuit OFF error detection only when the servo is locked	–	–	–	Supported.	Supported.	Supported.
Using Holding Area address H512 and onwards for function block address allocations	–	–	–	Supported.	Supported.	Supported.
Addition of supported models: SMARTSTEP Junior Servo Drives (R7D-ZN□-ML2)	–	–	–	–	Supported.	Supported.
Addition of rejoin function	–	–	–	–	Supported.	Supported.
Eliminating connection restriction when Servo Drive alarms occur (enabling connection when alarm A.C90 occurs)	–	–	–	–	Supported.	Supported.
Addition of origin search operation modes	–	–	–	–	Supported.	Supported.
Addition of origin search preset function	–	–	–	–	Supported.	Supported.
Faster setting for transfer cycle and communications cycle when setting the absolute encoder PG zero point position offset with an origin search	–	–	–	–	–	Supported.

Dimensions

(Unit: mm)

CJ1W-NC271
CJ1W-NC471
CJ1W-NCF71
CJ1W-NCF71-MA

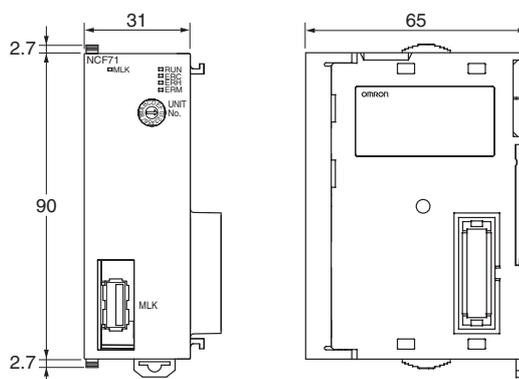

Related Manuals

English Cat.No.	Japanese Cat.No.	Model	Name
W426	SBCE-323	CS1W-NC□71/ CJ1W-NC□71(-MA)	CS1W/CJ1W-NC□71(-MA) CS/CJ-series MECHATROLINK-II-compatible Position Control Unit User's Manual
W436	SBCE-328	CXONE-AL□□C/D-V□	CX-Motion-NCF Operation Manual
–	SBCE-055	CS1W-NCF71/CJ1W-NCF71	CS1W-NCF71/CJ1W-NCF71 Position Control Unit(ONNUC G-series)Technical Guide
–	SBCE-042	CS1W-NCF71/CJ1W-NCF71	CS1W-NCF71/CJ1W-NCF71 Position Control Unit(ONNUC W-series)Technical Guide

Read and Understand This Catalog

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranty and Limitations of Liability

WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall the responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

Application Considerations

SUITABILITY FOR USE

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the products.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this catalog.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCTS ARE PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

PROGRAMMABLE PRODUCTS

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

Disclaimers

CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the products may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased products.

DIMENSIONS AND WEIGHTS

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

PERFORMANCE DATA

Performance data given in this catalog is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

ERRORS AND OMISSIONS

The information in this document has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

2010.4

In the interest of product improvement, specifications are subject to change without notice.

OMRON Corporation
Industrial Automation Company

<http://www.ia.omron.com/>

(c)Copyright OMRON Corporation 2010 All Right Reserved.