

# ST45L/ ST56L/ ST80L series

LED Steady/Flashing Tower Lights

Universal LED tower light with a wide selection of audio and visual signaling options according to the application environment and intended use

### 1 Different sizes of LED steady/flashing lenses

You can select from a variety of indicators depending on the working environment and application needs

Model number	Lens diameter	Lens length
ST45(M)L	45mm	40mm
ST45(M)LF	45mm	40mm
ST56(M)EL	56mm	40mm
ST56(M)ELF	56mm	40mm
ST56(M)L	56mm	70mm
ST56(M)LF	56mm	70mm
ST80(M)EL	80mm	40mm
ST80(M)ELF	80mm	40mm
ST80(M)L	80mm	70mm
ST80(M)LF	80mm	70mm

### 2 Buzzer and sound patterns with 15 different tones

Concrete messages can be clearly conveyed with the option of 15 types of audible signals

Main	Built-in sound	Channel	Sound patterns
BZ	1 buzzer sound 2 buzzer sounds		Customized 2 tone Buzzer available
WS	5 Warning sounds	Ch1 Ch2 Ch3 Ch4 Ch5	Fire.A-ANG Emergency Ambulance Machinery Fault High Expansion
WM	5 Melodies	Ch1 Ch2 Ch3 Ch4 Ch5	Sweet Home For Elise Cuckoo's Waltz Piano Sonata Turkish March
WA	5 Alarms	Ch1 Ch2 Ch3 Ch4 Ch5	Beep Intermittent Door Chime Phone Ring PI.PI.PI Short Tripping Beat



### 3 A variety of mounting bracket selection

- Wall mount type model allows for contained and tidy wiring with no exposed wires
- A number of pole mounting stands are available for a variety of environments depending on location and mounting needs
- Specifically, the QL-type and SL-type tower lights can be applied in a variety of environments as it can be folded up to 90 degrees in the horizontal direction. These products can avoid damage due to external forces when movement of the equipment is required
- QLA type offers an easy to use angle adjustment button on the side for angle intervals of 45 to 90 degrees. No additional tools necessary



#### Mounting Bracket Options

##### • Wall Mount Brackets

TWS45 TWS80	TWA45 TWA80
Steel	PC

##### • Pole Mount Brackets

Standard	LB18 LB24	LW18 LW24	QZ18 QZ24	SZ18 SZ24	QL18 QL24	SL18 SL24	QLA18 QLA24
Steel	Steel	PC	PC	Al	PC	Al	PC

\* Please refer to page 188-193 for detailed dimensions.

# ST45L/ ST56L/ ST80L series

LED Steady/Flashing Tower Lights

## Interchangeable Lens Concept


ST45L/ ST56L/ ST80L series product allows for the lens arrangement to be adjusted after removing the bolt that secures the cover. If additional lenses are required for this product please reach out to us. ST45L/ ST56L/ ST80L series can be stacked up to 5 layers.



## Common Specifications(ST45(M)L/ ST56(M)EL/ ST56(M)L/ ST80(M)EL/ ST80(M)L)

- LED steady/flashing tower lights
- Long product lifetime of over 20,000hours with the application of a high intensity LED light source
- Can select from size selections of Ø45mm, Ø56mm, and Ø80mm to fit your sophisticated application needs
- A variety of mounting bracket selections for the pole mount type to fit your location and mounting needs
- Built-in buzzer available (Volume : Max 90dB at 1m)
- Built-in alarm available (Volume : Max 85dB at 1m/ Speaker output type)  
(Can select from 5 warning sounds, 5 alarms, 5 melodies to fit your application needs)
- Flashing rate : 60-80 flashes/min
- Customized color arrangement available (LED light distribution system and lens is integrated into a combined structure)
- Materials : Lens-AS, Housing-ABS, Pole-AI
- Ambient operating temperature: -30°C to +60°C
- Protection rating : Standard type-IP44, Built-in buzzer type-IP23
- Certificates : CE Compliant, UL Listed
- Compliant with RoHS directive

## Reflection System

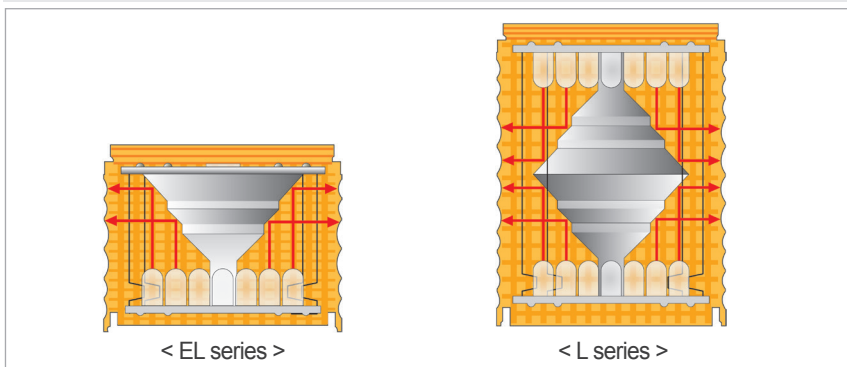


- Qlight's special light distribution system with multi-tiered reflector provides linear and balanced light transmission to the lens for strong LED illumination throughout the product
- The special light diffusion structure inside the product creates the brightest signal light at the center of the lens

## References

Mount type	Sound	Buzzer and sound patterns	Lens dimension				
			Ø45mm H40mm	Ø56mm H40mm	Ø56mm H70mm	Ø80mm H40mm	Ø80mm H70mm
 Direct mount	No sound	Standard	ST45ML(F)	ST56MEL(F)	ST56ML(F)	ST80MEL(F)	ST80ML(F)
		Built-in buzzer	ST45ML(F)-BZ	ST56MEL(F)-BZ	ST56ML(F)-BZ	ST80MEL(F)-BZ	ST80ML(F)-BZ
		5 Warning sounds	ST45ML(F)-WS	ST56MEL(F)-WS	ST56ML(F)-WS	ST80MEL(F)-WS	ST80ML(F)-WS
		5 Melodies	ST45ML(F)-WM	ST56MEL(F)-WM	ST56ML(F)-WM	ST80MEL(F)-WM	ST80ML(F)-WM
 Pole mount	5 Alarms	ST45ML(F)-WA	ST56MEL(F)-WA	ST56ML(F)-WA	ST80MEL(F)-WA	ST80ML(F)-WA	
	No sound	Standard	ST45L(F)	ST56EL(F)	ST56L(F)	ST80EL(F)	ST80L(F)
		Built-in buzzer	ST45L(F)-BZ	ST56EL(F)-BZ	ST56L(F)-BZ	ST80EL(F)-BZ	ST80L(F)-BZ
		5 Warning sounds	ST45L(F)-WS	ST56EL(F)-WS	ST56L(F)-WS	ST80EL(F)-WS	ST80L(F)-WS
		5 Melodies	ST45L(F)-WM	ST56EL(F)-WM	ST56L(F)-WM	ST80EL(F)-WM	ST80L(F)-WM
5 Alarms	ST45L(F)-WA	ST56EL(F)-WA	ST56L(F)-WA	ST80EL(F)-WA	ST80L(F)-WA		

# ST80EL

## Ø80mm LED Steady/Flashing Tower Lights



ST80EL series

Built-in buzzer output holes formed on the housing of the product.



### Substitute model numbers for discontinued model

Built-in signal sound type, ST80EL-WS, ST80EL-WM, ST80EL-WA are substituted for old model number ST80WEL. All specifications such as diameter and functions are all the same.



### Mounting Bracket

Standard	LB24	LW24	QZ24
Steel	Steel	PC	PC
SZ24	QL24	SL24	QLA24
AI	PC	AI	PC

※ Please refer to page 188-193 for detailed dimensions.



## ST80EL Ø80mm Pole Mount, LED Steady/Flashing

Model number	Layer	Voltage	Current	Certificates	Weight	Color
ST80EL ST80EL-BZ ST80EL-WS ST80EL-WM ST80EL-WA ST80ELF ST80ELF-BZ ST80ELF-WS ST80ELF-WM ST80ELF-WA	1	AC/DC12V	0.080A	CE DC only UL DC24V only (buzzer type)	0.58kg	● R-Red
		AC/DC24V	0.040A		0.58kg	
		AC110V	0.046A		0.81kg	
	2	AC/DC12V	0.160A		0.67kg	● R-Red ● G-Green
		AC/DC24V	0.080A		0.67kg	
		AC110V	0.051A		0.91kg	
	3	AC/DC12V	0.240A		0.77kg	● R-Red ● A-Amber ● G-Green
		AC/DC24V	0.120A		0.77kg	
		AC110V	0.057A		1.00kg	
	4	AC/DC12V	0.320A		0.86kg	● R-Red ● A-Amber ● G-Green ● B-Blue
		AC/DC24V	0.160A		0.86kg	
		AC110V	0.064A		1.09kg	
	5	AC/DC12V	0.400A		0.95kg	● R-Red ● A-Amber ● G-Green ● B-Blue ● W-White
		AC/DC24V	0.200A		0.95kg	
		AC110V	0.071A		1.19kg	
		AC220V	0.032A		1.09kg	

- ST80EL Steady
- ST80EL-BZ Built-in buzzer, Steady
- ST80EL-WS Built-in 5 Warning sounds, Steady
- ST80EL-WM Built-in 5 Melodies, Steady
- ST80EL-WA Built-in 5 Alarms, Steady
- ST80ELF Steady/ flashing
- ST80ELF-BZ Built-in buzzer, Steady/ flashing
- ST80ELF-WS Built-in 5 Warning sounds, Steady/ flashing
- ST80ELF-WM Built-in 5 Melodies, Steady/ flashing
- ST80ELF-WA Built-in 5 Alarms, Steady/ flashing

※ Please refer to page 186 for detailed information about selectable sound patterns.

### Signal/ Audible Line Current(per each layer)

Voltage	AC/DC12V	AC/DC24V	AC110V	AC220V
Signal line current	0.080A	0.040A	0.046A	0.023A
Audible line current	0.016A	0.031A	0.027A	0.030A



### Customization

- 2 buzzer sound types : Both prolonged (beep, beep) and staccato (beep, beep, beep) buzzer output available
- AC type each layer power provided(same wiring DC steady)
- DC24V voltage UL listed product
- Customized pole length available



### Ordering Specification

<b>ST80EL</b>	-	<b>3</b>	-	<b>220</b>	-	<b>RAG</b>	-	<b>LW24</b>
[Model number]		[Layer]		[Voltage]		[Color]		[Mounting bracket]
• ST80EL • ST80EL-BZ • ST80EL-WS • ST80EL-WM • ST80EL-WA • ST80ELF • ST80ELF-BZ • ST80ELF-WS • ST80ELF-WM • ST80ELF-WA		• 1-1Layer • 2-2Layers • 3-3Layers • 4-4Layers • 5-5Layers		• 12-DC12V • 24-DC24V • 110-AC110V • 220-AC220V		● R-Red ● A-Amber ● G-Green ● B-Blue ● W-White		• None • -Standard • -Bracket • -LB24 • -LW24 • -QZ24 • -SZ24 • -QL24 • -SL24 • -QLA24

# ST80MEL/ST80EL

Ø80mm LED Steady/Flashing Tower Lights




## Technical Diagram

(Units : mm)


ST80MEL : AC/DC  
ST80MELF : AC/DC

ST80MEL-BZ : AC/DC  
ST80MELF-BZ : AC/DC

ST80MEL-W□  
ST80MELF-W□



LAYER	L
1	150
2	190
3	230
4	270
5	310




LAYER	L
1	230
2	270
3	310
4	350
5	390





ST80EL : AC/DC  
ST80ELF : AC/DC

ST80EL-BZ : AC/DC  
ST80ELF-BZ : AC/DC

ST80EL-W□  
ST80ELF-W□

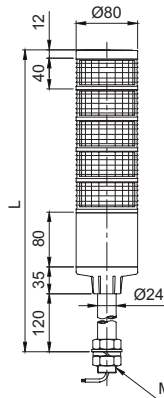

LAYER	L
1	287
2	327
3	367
4	407
5	447

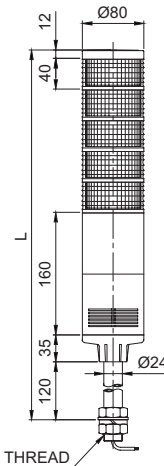

LAYER	L
1	367
2	407
3	447
4	487
5	527



## Wiring Instructions

- External power line : UL1015 AWG18(0.75sq)×2C 400mm
  - External signal line : UL1007 AWG22(0.3sq) 400mm
  - LED tower light can be wired by using transistor and external contact
- ※ Please refer to page 56-57 for detailed wiring instructions.



# ST45L/ST56L/ST80L series

## LED Steady/Flashing Tower Lights



### Wiring Instructions(using external contact)

- Please wire based on below instructions in case of using external contact.
- Customized AC each layer power supply type wiring is same as DC steady type.

Applied products	Wiring Instructions	Applied products	Wiring Instructions
DC Steady  ST45ML ST45L ST56MEL ST56ML ST56EL ST56L ST80MEL ST80ML ST80EL ST80L		AC Steady  ST45ML ST45L ST56MEL ST56ML ST56EL ST56L ST80MEL ST80ML ST80EL ST80L	
DC Steady/Flashing  ST45MLF ST45LF ST56MELF ST56MLF ST56ELF ST56LF ST80MELF ST80MLF ST80ELF ST80LF		AC Steady/Flashing  ST45MLF ST45LF ST56MELF ST56MLF ST56ELF ST56LF ST80MELF ST80MLF ST80ELF ST80LF	
DC/AC Steady Built-in Signal Sound  ST45ML ST45L ST56MEL ST56ML ST56EL ST56L ST80MEL ST80ML ST80EL ST80L		DC/AC Steady/Flashing Built-in Signal Sound  ST45MLF ST45LF ST56MELF ST56MLF ST56ELF ST56LF ST80MELF ST80MLF ST80ELF ST80LF	

- DC Steady type : External power, External signal line UL1007 AWG22(0.3sq) 400mm
- AC Steady, AC/DC steady/flashing type : External power line UL1015 AWG18(0.75sq)×2C 400mm  
External signal line : UL1007 AWG22(0.3sq) 400mm

# ST45L/ST56L/ST80L series

LED Steady/Flashing Tower Lights



## Wiring Instructions(using transistor)

• In case of wiring by transistor, please make sure if it is NPN type or PNP type. Please carefully follow wiring instruction below.

Applied products	Wiring Instructions		
DC Steady	<p>EXTERNAL TRANSISTOR-NPN</p>	<p>EXTERNAL TRANSISTOR-PNP</p>	
ST45ML ST45L ST56MEL ST56ML ST56EL ST56L ST80MEL ST80ML ST80EL ST80L			
Applied products	Wiring Instructions	Applied products	Wiring Instructions
DC Steady/Flashing	<p>EXTERNAL TRANSISTOR-PNP</p>	AC Steady/Flashing	<p>EXTERNAL TRANSISTOR-PNP</p>
ST45MLF ST45LF ST56MELF ST56MLF ST56ELF ST56LF ST80MELF ST80MLF ST80ELF ST80LF		ST45MLF ST45LF ST56MELF ST56MLF ST56ELF ST56LF ST80MELF ST80MLF ST80ELF ST80LF	
DC/AC Steady Built-in Signal Sound	<p>EXTERNAL TRANSISTOR-NPN</p>	DC/AC Steady/Flashing Built-in Signal Sound	<p>EXTERNAL TRANSISTOR-PNP</p>
ST45ML ST45L ST56MEL ST56ML ST56EL ST56L ST80MEL ST80ML ST80EL ST80L	<ul style="list-style-type: none"> <li>• STXXM(E)L - WS/ WM/ WA same wiring instruction</li> <li>• STXX(E)L - WS/ WM/ WA same wiring instruction</li> <li>• STXXL <ul style="list-style-type: none"> <li>└ Lens diameter 45(45mm) : ST45L</li> <li>56(56mm) : ST56L</li> <li>80(80mm) : ST80L</li> </ul> </li> </ul>	ST45MLF ST45LF ST56MELF ST56MLF ST56ELF ST56LF ST80MELF ST80MLF ST80ELF ST80LF	<ul style="list-style-type: none"> <li>• STXXM(E)LF - WS/ WM/ WA same wiring instruction</li> <li>• STXX(E)LF - WS/ WM/ WA same wiring instruction</li> <li>• STXXLF <ul style="list-style-type: none"> <li>└ Lens diameter 45(45mm) : ST45LF</li> <li>56(56mm) : ST56LF</li> <li>80(80mm) : ST80LF</li> </ul> </li> </ul>

- DC Steady type : External power, External signal line UL1007 AWG22(0.3sq) 400mm
- AC Steady, AC/DC steady/flashing type : External power line UL1015 AWG18(0.75sq)×2C 400mm  
External signal line : UL1007 AWG22(0.3sq) 400mm