



Ordering Information



- 1 Input  
Wire, Input PT ratio, Input CT ratio

Technical Data

Measurement & Accuracy

Active power  $\leq 0.5\%$  of reading + 2digit  
Active energy  $\leq 1.0\%$  of reading + 2digit

Display

Type FND, Red color  
Number of Line 6 Digits X 1Line  
Height of Character 10 mm

Inputs

Auxiliary Supply	AC 90~260V (50 or 60Hz), DC110V	Voltage Ratio	Max. 154kV (3P3W), 22.9kV (3P4W) / 110V
Voltage ( Direct or Secondary )	AC 40 ~ 500V	Current Ratio	Max. 6000A / 5A
Current ( Direct or Secondary )	AC 0.1 ~ 6.0A		


Environmental Condition

Operating temperature	0~55°C	Relative humidity	$\leq 80\%$
Storage temperature	-20~85°C	Ingress protection rating	IP54(front), IP20(case)

Connections

Circuit	Three phase 3wire Three phase 4wire	PT, Aux Terminal	M4 Bolt
---------	--	------------------	---------

Connection Diagram

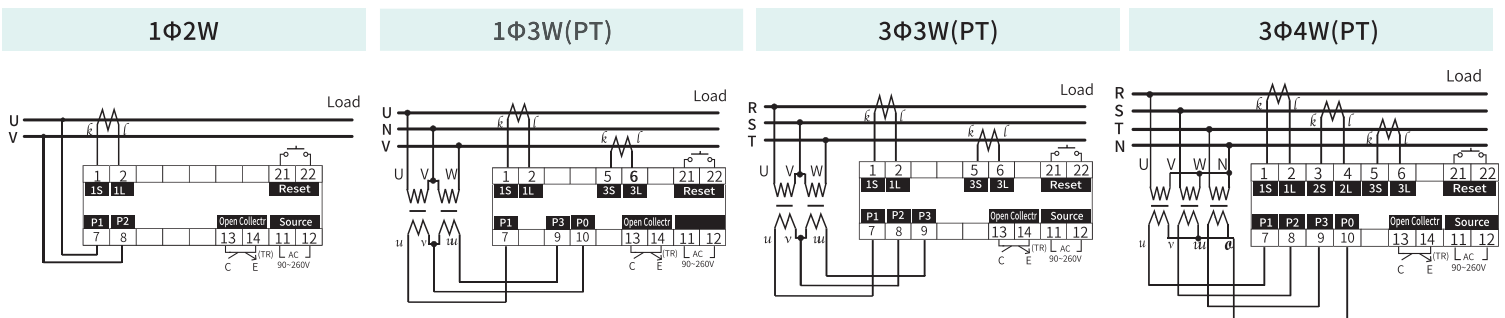

Dimensions

Panel Cutout(mm) 92(W) x 45(H)  
Product(mm) 97(W) x 49(H) x 157(D)  
Weight(g) 450g(unpacked), 650g(shipping)

