



VFD-B

External Dimensions


A

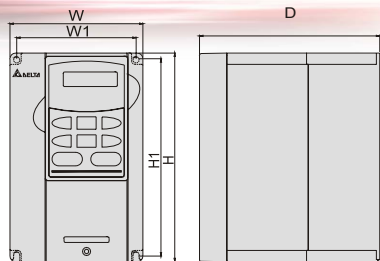

B



C



unit:mm

VFD-B

External Dimensions

■ Dimensions

Model	W	W1	H	H1	D	Fan cooled	Fig
VFD007B21A	118(4.65)	108(4.25)	185(7.28)	173(6.81)	160(6.30)	NO	
VFD007B23A	118(4.65)				145(5.71)	NO	
VFD007B43A	118(4.65)				145(5.71)	NO	A
VFD007B53A	118(4.65)				145(5.71)	NO	
VFD015B21A	118(4.65)	108(4.25)	185(7.28)	173(6.81)	160(6.30)	NO	
VFD015B21B	118(4.65)				145(5.71)	Yes	
VFD015B23A	118(4.65)				160(6.30)	NO	
VFD015B23B	118(4.65)				145(5.71)	Yes	A
VFD015B43A	118(4.65)				160(6.30)	NO	
VFD015B53A	118(4.65)				160(6.30)	NO	
VFD022B21A	150(5.91)	135(5.32)	260(10.24)	244.3(9.68)	160.2(6.31)	Yes	
VFD022B23B	118(4.65)	108(4.25)	185(7.28)	173(6.81)	145(5.71)	Yes	
VFD022B43A	118(4.65)	108(4.25)	185(7.28)	173(6.81)	145(5.71)	Yes	A
VFD022B43B	118(4.65)	108(4.25)	185(7.28)	173(6.81)	145(5.71)	Yes	
VFD037B23A	150(5.91)	135(5.32)	260(10.24)	244.3(9.68)	160.2(6.31)	Yes	
VFD037B43A						Yes	
VFD037B53A						Yes	A
VFD055B23A	200(7.88)	185(6.731)	323(12.72)	303(11.93)	183.2(7.22)	Yes	
VFD055B43A						Yes	A
VFD055B53A						Yes	
VFD075B23A	200(7.88)	185(6.731)	323(12.72)	303(11.93)	183.2(7.22)	Yes	
VFD075B43A						Yes	A
VFD075B53A						Yes	
VFD110B23A	200(7.88)	185(6.731)	323(12.72)	303(11.93)	183.2(7.22)	Yes	
VFD110B43A						Yes	A
VFD110B53A						Yes	
VFD150B23A	250(9.84)	226(8.90)	430.8(15.90)	384(15.12)	205.4(8.08)	Yes	
VFD150B43A						Yes	A
VFD150B53A						Yes	
VFD185B23A	250(9.84)	226(8.90)	430.8(15.90)	384(15.12)	205.4(8.08)	Yes	
VFD185B43A						Yes	A
VFD185B53A						Yes	
VFD220B23A	250(9.84)	226(8.90)	430.8(15.90)	384(15.12)	205.4(8.08)	Yes	
VFD220B43A						Yes	A
VFD220B53A						Yes	
VFD300B23A	370(14.57)	335(13.19)	595(23.43)	560(22.55)	260(10.24)	Yes	
VFD300B43A	370(14.57)	335(13.19)	595(23.43)	560(22.55)	260(10.24)	Yes	B
VFD300B53A	370(14.57)	335(13.19)	595(23.43)	560(22.55)	260(10.24)	Yes	
VFD370B23A	370(14.57)	335(13.19)	595(23.43)	560(22.55)	260(10.24)	Yes	
VFD370B43A	370(14.57)	335(13.19)	595(23.43)	560(22.55)	260(10.24)	Yes	B
VFD370B53A	370(14.57)	335(13.19)	595(23.43)	560(22.55)	260(10.24)	Yes	
VFD450B43A	370(14.57)	335(13.19)	595(23.43)	560(22.55)	260(10.24)	Yes	B
VFD450B53A						Yes	
VFD550B43A	425(16.73)	385(15.16)	660(25.98)	631(24.84)	280(11.02)	Yes	
VFD550B53A	370(14.57)	335(13.19)	595(23.43)	560(22.55)	260(10.24)	Yes	C
VFD750B43A	425(16.73)	385(15.16)	660(25.98)	631(24.84)	280(11.02)	Yes	
VFD750B53A	370(14.57)	335(13.19)	595(23.43)	560(22.55)	260(10.24)	Yes	C

unit: inch

*We reserve the right of this catalogue contained information change without prior notice.



ASIA
DELTA ELECTRONICS, INC.
Taoyuan Plant
31-1, SHIEN PAN ROAD, KUEI SAN
INDUSTRIAL ZONE, TAOYUAN SHIEN,
TAIWAN, R.O.C.
TEL: 886-3-262-4301
FAX: 886-3-262-7267
www.delta.com.tw/industrialautomation

NORTH/SOUTH AMERICA
DELTA PRODUCTS CORPORATION
Sales Office
P.O. BOX 12173
5101 DAVIS DRIVE
RESEARCH TRIANGLE PARK,
NC 27709, U.S.A.
TEL: 1-919-767-3913
FAX: 1-919-767-3969

EUROPE
DELTRONICS (NETHERLANDS) B.V.
DE WITBOOG 15
NL-5652 AG EINDHOVEN
THE NETHERLANDS
TEL: 31-40 259-2850
FAX: 31-40 259-2851

DELTA ELECTRONICS (JAPAN) INC.
DELTA SHIBADAIMON BLDG.
2-1-14 SHIBADAIMON, MINATO-KU,
TOKYO, 105-0012, JAPAN
TEL: 81-3-5733-1111
FAX: 81-3-5733-1211

20051012AMD-BE



Features:

- ▶ 16-bit microprocessor controlled PWM output
- ▶ Automatic torque boost & slip compensation
- ▶ Output frequency 0.1~400Hz
- ▶ 16-step speed control & 15-step preset speed
- ▶ PID feedback control & PG feedback control
- ▶ 4 accel./decel. times & 2 S-curve selections
- ▶ Pump control & automatic energy-saving
- ▶ Process follower - 10~10VDC, 0~10VDC, 4~20mA
- ▶ MODBUS communication RS-485 (Baud rate 38400)
- ▶ Coast or ramp to stop
- ▶ Adjustable V/F curve & automatic voltage regulation
- ▶ Automatic adjustment of accel./decel. time
- ▶ Auto tuning & sensorless vector control
- ▶ Sleep / Revival Function
- ▶ Master / Auxiliary and 1st/2nd frequency source selectable

Voltage Range:

- 1 Phase 230V Series : 0.75~2.2KW (1~3HP)
- 3 Phase 230V Series : 0.75~37KW (1~50HP)
- 3 Phase 460V Series : 0.75~75KW (1~100HP)
- 3 Phase 575V Series : 0.75~75KW (1~100HP)




VFD-B series have been approved by CE and UL

www.delta.com.tw/industrialautomation



Standard wiring diagram

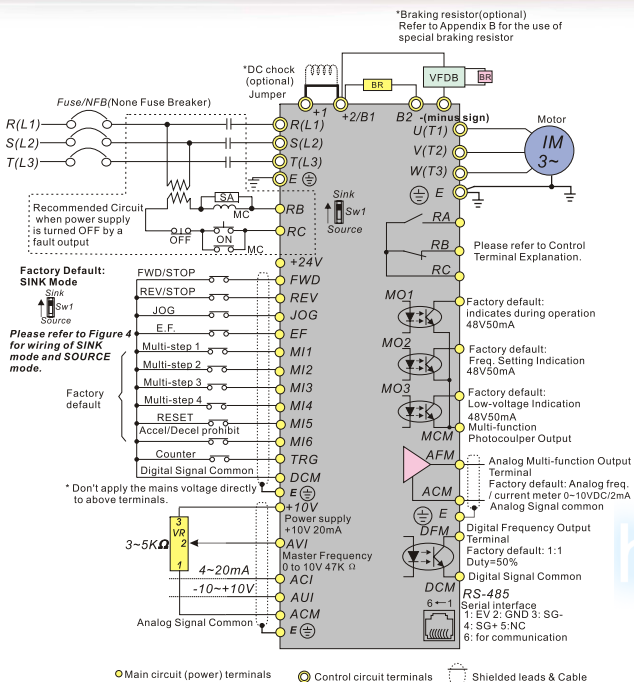

* Three phase input power may apply to single phase drives

* For the single phase application, the AC input line can be connected to any two of the three input terminals R,S,T.

VFD-B

Standard specifications

230V Series 1-Phase/3-Phase

Output Rating	Model Number	VFD □ □ □ B															
	Max. Applicable Motor Output (kW)	0.07	0.15	0.22	0.37	0.55	0.75	1.10	150	185	220	300	370				
	Max. Applicable Motor Output (HP)	0.1	0.2	0.3	0.5	0.75	1.1	15	18.5	22	30	37	40				
	Rated Output Capacity (kVA)	1.9	2.5	4.2	6.5	9.5	12.5	18.3	24.7	28.6	34	45.7	55				
	Output Current (A)	5.0	7.0	11	17	25	33	49	65	75	90	120	145				
Input Rating	Maximum Output Voltage (V)	3-Phase Proportional to Input voltage															
	Output Frequency (Hz)	0.1~400Hz															
	Carrier frequency (kHz)	1~15															
	Rated Input Current (A)	Single/3-Phase				3-Phase								1~9			
		11.9/ 5.7	15.3/ 7.6	22/ 10.5	37/ 15.4	20.6	26	34	50	60	75	90	110	142			
	Single (3-phase Input Current)	7.0 9.4 14.0															
	Rated Voltage , Frequency	Single/3-phase 200~240V , 50/60Hz				3-phase 200~240V , 50/60Hz											
Voltage Tolerance					±10%(180~264V)												
Frequency Tolerance					±5%(47~63Hz)												
Cooling Method	Natural				Fan Cooled												
Weight (Kg)	2.7	3.2	4.5	6.8	8	10	13	13	13	13	13	36	36				

460V Series 3-Phase

Output Rating	Model Number VFD - □ □ □ □ B																50/60Hz			
	Max. Model Number				0.75	1.5	2.2	3.7	5.5	7.5	11	15	18.5	22	30	37	45	55	75	110
	Max. Applicable Motor Output (kW)				0.75	1.5	2.2	3.7	5.5	7.5	11	15	18.5	22	30	37	45	55	75	110
	Max. Applicable Motor Output (HP)				1.0	2.0	3.0	5.0	7.5	10	15	20	25	30	40	50	60	75	100	150
	Rated Output Capacity (kVA)				2.3	3.2	4.2	6.5	9.9	13.7	18.3	24.4	28.9	34.3	45.7	55.6	69.3	84	110	150
Input Rating	Rated Output Current (A)				2.7	4.2	5.5	8.5	13	18	24	32	38	45	60	73	91	110	150	185
	Maximum Output Voltage (V)				3-Phase Proportional to input voltage															
	Output Frequency (Hz)				0.1~400Hz															
	Carrier frequency (kHz)				1-15				3-Phase				1-9				1-6			
	Rated Input Current (A)				3.2	4.3	5.9	11.2	14	19	25	32	39	49	60	63	90	130	160	185
Input Rating	Rated Voltage / Frequency				3-phase 380~480V / 50/60Hz															
	Voltage Tolerance				±10%(342~528V)															
	Frequency Tolerance				±5%(47~63Hz)															
	Cooling Method				Natural				Fan Cooled											
	Weight (kg)				2.7	3.2	4.2	6.5	7.7	3.2	4.5	6.8	8	10	13	13	13	13	36	36

575V Series 3-Phase

	Model Number	VFD - □□□ B	007	015	022	037	055	075	110	150	185	220	300	370	450	550	750
	Max. Applicable Motor Output (kW)	0.75	1.5	2.2	3.0	5.5	7.5	11	15	18.5	22	30	37	45	55	75	100
	Max. Applicable Motor Output (HP)	1.0	2.0	3.0	5.0	7.5	10	15	20	25	30	40	50	60	75	100	150
	Rated Output Capacity (kVA)	1.7	3.5	4.5	7.5	10	13.4	18.9	21.9	26.9	33.9	40.8	51.8	61.7	79.7	99.9	150
	Rated Output Current (A)	1.7	3.5	4.5	7.5	10	13.5	19	22	27	34	41	52	62	80	100	150
	Maximum Output Voltage (V)	3-Phase Proportional to input voltage															
	Output Frequency (Hz)	0.1~400Hz															
	Carrier frequency (kHz)	1~10				3-Phase				1~8				1~6			
	Rated Input Current (A)	2.0	3.6	4.9	9.9	10.8	14.3	19.8	22	27.7	37	41	52	62	95	117	150
	Rated Voltage , Frequency	3-phase 500~600V .50/60Hz															
	Voltage Tolerance	-15%(500~) /425~660V)															
	Frequency Tolerance	±5%(47~63Hz)															
	Cooling Method	Natural Fan Cooled															
	Weight (Kg)	2.7	3.2	4.5	6.8	8	10	13	13	13	13	13	36	36	36	50	50

Control Characteristics	Control System		SPWM (Sinusoidal Pulse Width Modulation)control (V/F or sensorless vector control)
	Freq. Setting Resolution		0.01Hz
	Output Frequency Resolution		0.01Hz
	Torque Characteristics		Including the auto-torque, auto-slip compensation; starting torque can be 150% at 1.0Hz
	Overload Endurance		150% of rated current for 1 minute
	Skip Frequency		Three zones, settings range 0.1-400Hz
	Accel/Decel Time		0.1 to 3600 seconds (4 independent settings for Accel/Decel Time)
	Stall Prevention Level Frequency Setting		20%-250%, Setting of Rated Current
	DC Injection Braking		Operation frequency 0-400Hz, output 0-100% rated current Start time 0-60 seconds, stop time 0-60 seconds
	Braking Torque		Approx. 20% (up to 125% possible with option braking resistor or braking unit externally mounted, 1-15HP braking transistor built-in)
Operating Characteristics	V/F Pattern		Adjustable V/F pattern
	Frequency Setting	Keypad External Signal	Set by
	Operation Setting Signal	Keypad External Signal	Set by RUN, STOP and JOG 2 wires / 3 wires (Fwd, Rev, EF), JOG operation, RS-485 serial interface (MODBUS)
	Multi-Function Input Signal		Multi-step selection 0 to 15, Jog, accel/decel inhibit, first to forth accel/decel switches, count/PLC operation, external Base Block (NC, NO), auxiliary motor control is invalid, AC/IAI selections, drive reset, UP/DOWN key settings, sink/source selection
	Multi-Function Output Indication		AC Drive Operating, Frequency Attained, Non-zero, Base Block, Fault Indication, Local/Remote indication, PLC Operation indication, Auxiliary Motor Output, Driver is Ready, Overheat, Alarm, Emergency Stop
	Analog Output Signal		Analog frequency/current signal output 1Form C contact or open collector output.
	Alarm Output Contact		
	Operation Functions		AVR, S-Curve, Over-Voltage, Over-Current Stall Prevention, Fault Records, Adjustable Carrier Frequency, DC Braking, Momentary Power Loss restart, Auto Tuning, Frequency Limits, Parameter Lock/Reset, Vector Control, Counter, PID Control, Fan & Pump Control, PLC, MODBUS Communication, Reverse Inhibition, PG feedback control, abnormal reset, abnormal re-start, digital frequency output, sleep/preval function, master/auxiliary frequency 1 st/2nd frequency source selections
Protective Functions		Self-testing, Over Voltage, Over Current, Under Voltage, Overload, Overheating, External Fault, Electronic thermal, Ground Fault.	
Display Keypads		8-key, 5-digit, 7-segment LED, 8 status LEDs, master frequency, output frequency, Output current, custom units, parameter values for setup, review and faults, RUN, STOP, RESET, FWD/REV, JOG	
Environmental Conditions	Protection Level		IP20 / NEMA1
	Pollution Degree		2
	Installation Location		Altitude 1,000m or less, keep from corrosive gas, liquid and dust
	Ambient Temperature		-10°C to 40°C (-10°C to 50°C without blind plate) Non-Condensing and not frozen
Storage / Transportation Temperature		-20°C to 60°C	
Ambient Humidity		Below 90% RH (non-condensing)	
Vibration		9.80665m/s ² (1G) less than 20Hz, 5.88m/s ² (0.6G) at 20 to 50Hz	
Approvals			