

Frequency Meter

Certificates 



Model No.

KDF - 
① ②

① Input

Voltage	Input	Range
AC 50~260V	100Hz	30.00~99.99
AC 10V	1kHz	30.0~999.9
AC 10V	100Hz	30.00~99.99

② Communication (Option)

C RS-485 **NA** None

 How to order KDF 99.99 / AC 50~260V KDF 999.9 / AC 10V

 Standard : AC 50~60V, 100Hz

 Customized product can be produced by order.


Specification

Aux. power	AC 90 ~ 260V(50/60Hz) / DC110V
Operating temperature	-10~50°C
Operating humidity	20~85%
Insulation resistance	More than 10MΩ
Surge impulse	Voltage(1.2μs/ 50μs,5kV) Current(8μs/ 20μs)
Withstand voltage	AC 2kV/1 minute
Maximum input	150% seconds
Weight	250g

Display

Text height (LED)	20.5(0.8")mm Red
Measuring interval	2.5Times / sec
Max display value	9999

Connection diagram

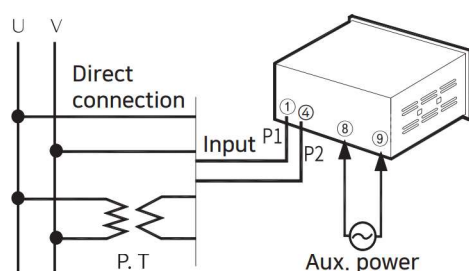

Input

Range	AC voltage	
	AC 50 ~ 260V	30.00 ~ 99.99Hz
	AC 10V	30.0 ~ 999.9Hz
	AC 10V	30.00 ~ 99.99Hz
Accuracy		±(0.1 of rdg + 1digit)

Drawing

 Refer to page 80 Type A-2